


N-TopCon series

182 N-TopCon Bifacial Module


415W ~ 430W

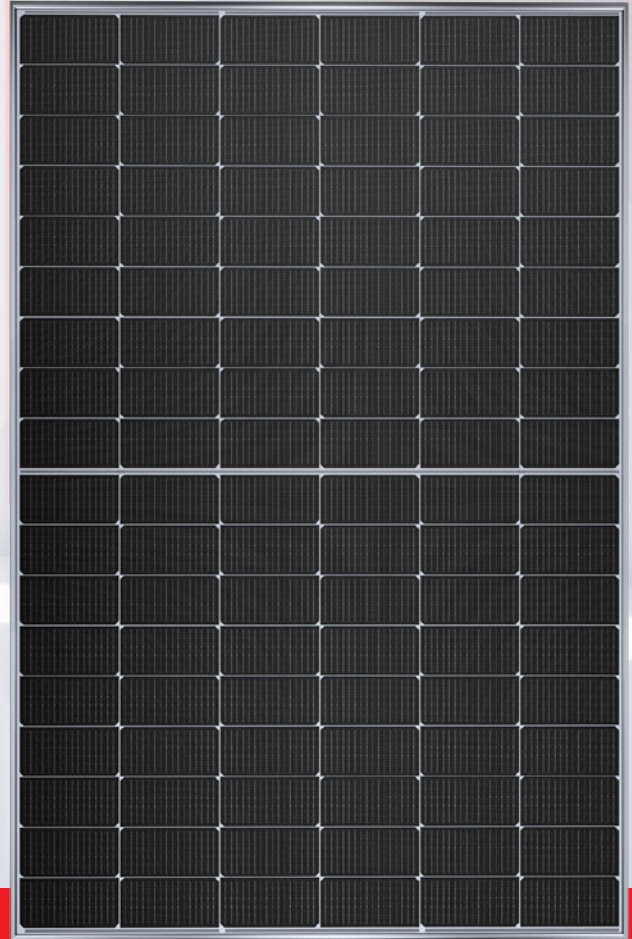

12 years product workmanship warranty

30 years linear power output warranty

1% 1st-year degradation
0.40% annual degradation

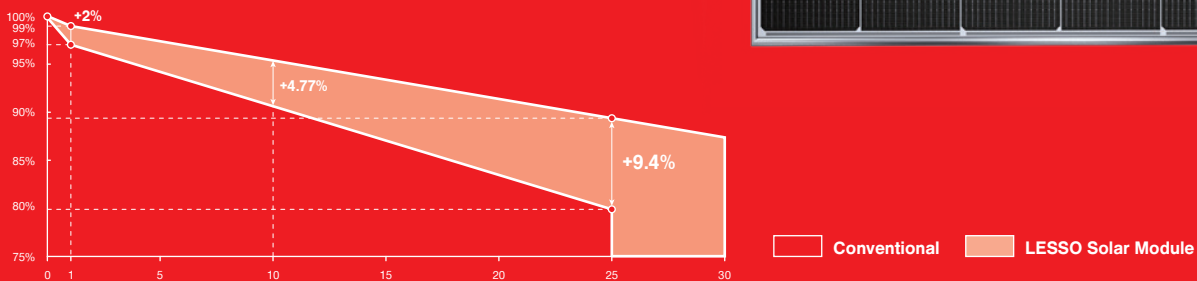

FEATURES AND BENEFITS

- N-TopCon brings 10-30% additional power generation comparing with conventional P-type module.
- N-TopCon solar cell has no LID naturally which can increase power generation.
- Higher bifaciality, higher power output and lower BOS cost.
- Double sides power output to reach higher comprehensive efficiency and get more profit.
- Higher power output even under low-light environments like on cloudy or foggy days.
- Higher power generation under working conditions, thanks to passivating contact cell technology.
- More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area.

LESSO 182 N-TopCon Bifacial Module



Power Range
415W ~ 430W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
22.02%

Structure Performance

Solar Cell Type	182mm N-TopCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×35mm/30mm
Weight	24.1kg(35mm) / 23.4kg(30mm)
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait $\begin{matrix} 400mm (+) \\ 200mm (-) \end{matrix}$, landscape $\begin{matrix} 1400mm (+) \\ 1400mm (-) \end{matrix}$ Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs(35mm) / 36pcs(30mm)
Per Container(40'HQ)	806pcs(35mm) / 936pcs(30mm)

(Unit: mm)

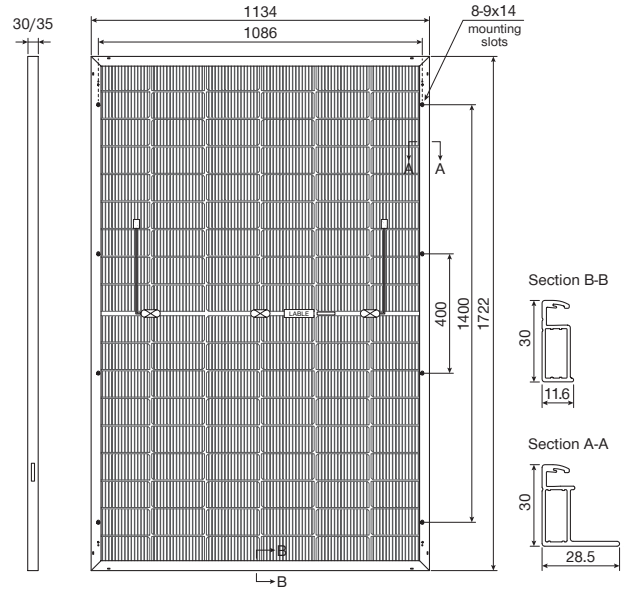


Electrical Performance Parameters | STC

Model Type	415C(HBD) 54(182)	420C(HBD) 54(182)	425C(HBD) 54(182)	430C(HBD) 54(182)	
Nominal Max. Power	P _{max} (W)	415	420	425	430
Max. Power Voltage	V _{mp} (V)	31.18	31.42	31.65	31.88
Max. Power Current	I _{mp} (A)	13.31	13.37	13.43	13.49
Open Circuit Voltage	V _{oc} (V)	36.77	36.97	37.17	37.37
Short Circuit Current	I _{sc} (A)	14.55	14.61	14.67	14.73
Module Efficiency	(%)	21.25	21.51	21.76	22.02
Power Output Tolerance	(W)	0~+5W			

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

* Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (435C)

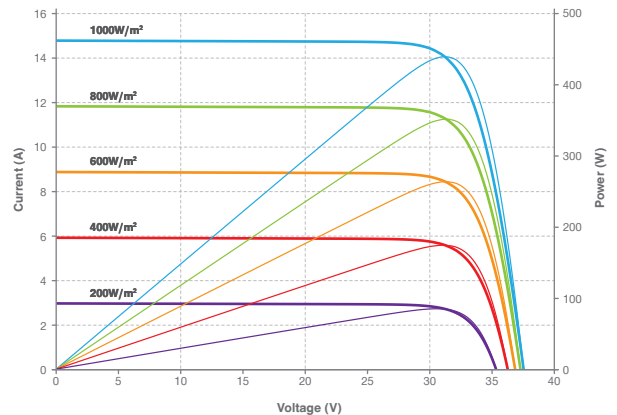

Electrical Performance Parameters | NMOT

Model Type	415C(HBD) 54(182)	420C(HBD) 54(182)	425C(HBD) 54(182)	430C(HBD) 54(182)	
Nominal Max. Power	P _{max} (W)	311	315	319	323
Max. Power Voltage	V _{mp} (V)	29.41	29.61	29.82	30.02
Max. Power Current	I _{mp} (A)	10.58	10.64	10.70	10.76
Open Circuit Voltage	V _{oc} (V)	34.30	34.49	34.68	34.87
Short Circuit Current	I _{sc} (A)	11.80	11.85	11.90	11.95

* NMOT: Irradiance 800W/m², Cell Temperature 20°C, Wind Speed 1m/s.

* Power measurement tolerance ±3%.

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.043%
Temperature Coefficient (V _{oc})	-0.25%
Temperature Coefficient (P _{max})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

