

Pure Black series

182 N-type Monofacial Module

565W ~ 585W



12 years product
workmanship warranty





25 years linear power output
warranty



1% 1st-year degradation

0.40% annual degradation

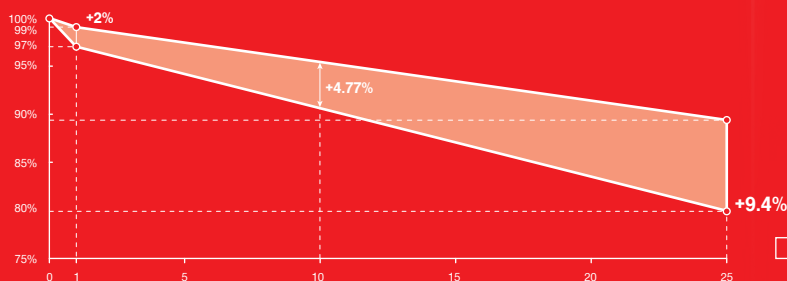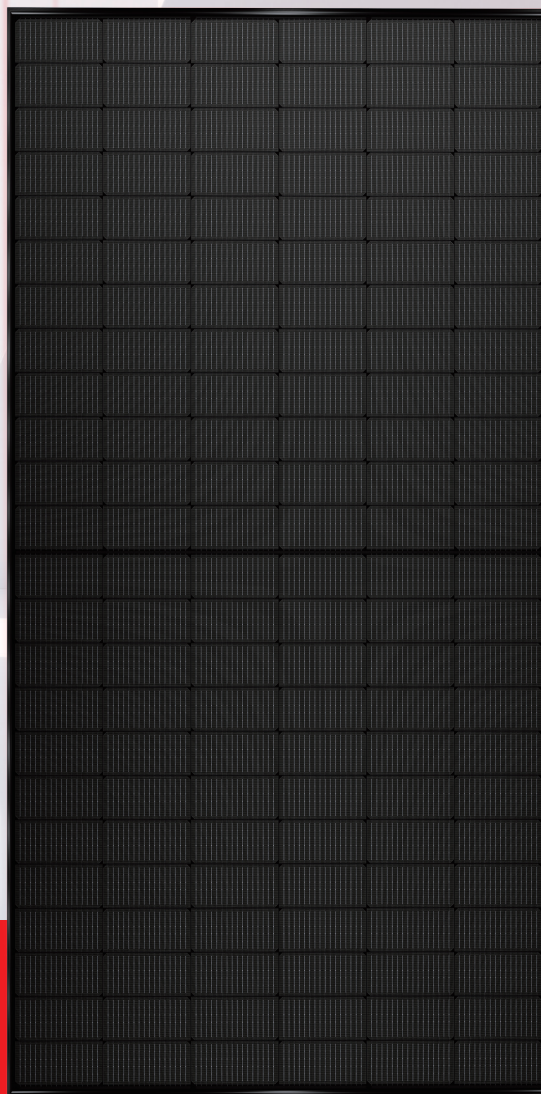

Conventional LESSO Solar Module

FEATURES AND BENEFITS



Topcon technology, higher power generation.



Highly-resistant black, crystal material, modernity to buildings.



Better temperature coefficient, more power generation.



Zero LID, increase power generation.



Even cloudy or foggy days, better weak illumination response.



Multiple weather, resistance tests, wider applicability.

LESSO 182 Pure Black N-type Monofacial Module (72)



Power Range
565W ~ 585W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.65%

(Unit: mm)

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×30mm
Weight	26.9kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

Electrical Performance Parameters											
Model Type	565C(BPM)72(182)		570C(BPM)72(182)		575C(BPM)72(182)		580C(BPM)72(182)		585C(BPM)72(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	565	425	570	429	575	433	580	437	585	441
Max. Power Voltage	V _{MPP} (V)	42.33	39.80	42.48	39.95	42.63	40.10	42.78	40.24	42.94	40.40
Max. Power Current	I _{MPP} (A)	13.35	10.68	13.42	10.74	13.49	10.80	13.56	10.86	13.63	10.92
Open Circuit Voltage	V _{OC} (V)	50.86	48.31	51.00	48.45	51.15	48.58	51.29	48.71	51.40	48.85
Short Circuit Current	I _{SC} (A)	14.11	11.38	14.18	11.44	14.26	11.51	14.34	11.57	14.42	11.63
Module Efficiency	(%)	21.87		22.07		22.26		22.45		22.65	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (585C)

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.043%
Temperature Coefficient (V _{oc})	-0.25%
Temperature Coefficient (P _{max})	-0.30%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

Lesso New Energy Global Trading Private Limited
One Raffles Quay, North Tower, #19-03, Singapore 048583

 info@lessosolar.com

    LESSO Solar

Data contained in these specifications is subject to change without notice.