

P series

210 P-type Bifacial Module

655W ~ 665W




12 years product
workmanship warranty



30 years linear power output
warranty



2% 1st-year degradation
0.45% annual degradation

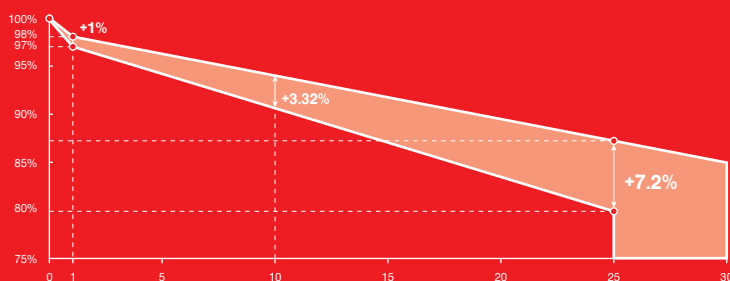

Conventional LESSO Solar Module

FEATURES AND BENEFITS



MBB technology reducing string & busbar loss.



Better temperature coefficient, more power generation.



Even cloudy or foggy days, better weak illumination response.



Zero LID, increase power generation.



High efficiency PERC, better resistance against PID.



Higher power output, lower bos cost.



Multiple weather, resistance tests, wider applicability.



Double-sided generation, powerfully energy boost.

LESSO 210 P-type Bifacial Module (66)



Power Range
655W ~ 665W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
21.41%

(Unit: mm)

Structure Performance

Solar Cell Type	210mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	132pcs(6x22)
Module Dimension	2384×1303×35mm
Weight	38.2kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm (+)} / _{200mm (-)} , landscape ^{1400mm (+)} / _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	558pcs

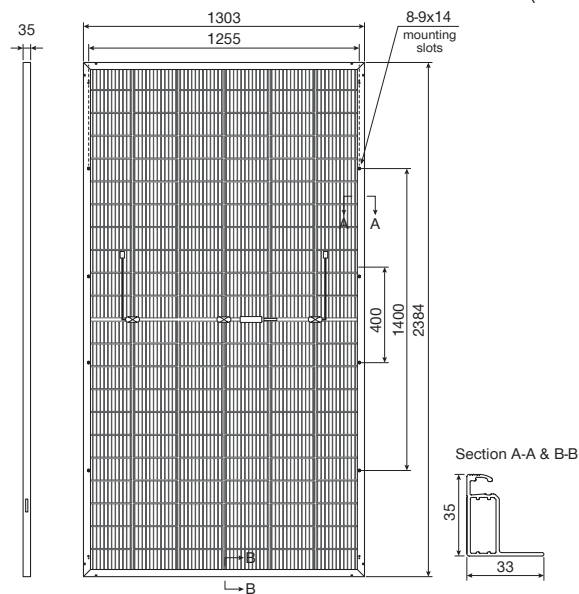


Electrical Performance Parameters

Model Type		655D(HBD)66(210)		660D(HBD)66(210)		665D(HBD)66(210)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	655	496	660	500	665	504
Max. Power Voltage	V _{MPP} (V)	37.83	35.22	38.03	35.42	38.23	35.62
Max. Power Current	I _{MPP} (A)	17.32	14.08	17.36	14.12	17.40	14.16
Open Circuit Voltage	V _{OC} (V)	45.80	43.20	46.00	43.40	46.20	43.60
Short Circuit Current	I _{SC} (A)	18.38	14.82	18.42	14.86	18.46	14.90
Module Efficiency	(%)	21.09		21.25		21.41	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (665D)

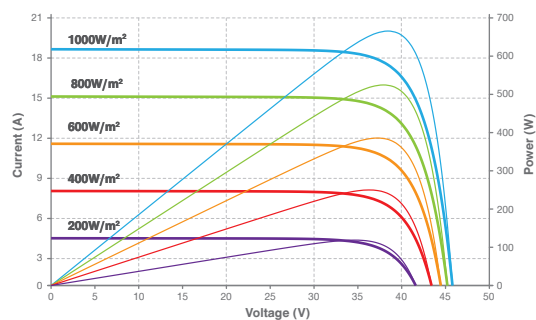

Bifacial Output-rearside Power Gain

	Maximum Power	P _{MAX} (W)	688	693	698
5%	Module Efficiency	(%)	22.14	22.31	22.48
10%	Maximum Power	P _{MAX} (W)	721	726	732
	Module Efficiency	(%)	23.19	23.37	23.55
25%	Maximum Power	P _{MAX} (W)	819	825	831
	Module Efficiency	(%)	26.36	26.56	26.76

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (I _{SC})	+0.048%	Temperature Coefficient (P _{MAX})	-0.34%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A