

### **Guangdong Lesso Energy Storage Technology Co., Ltd**

Daba Industrial Area, Longjiang Town, Foshan Clty, Guangdong Province, China LESSO Group (2128) is listed in the Stock Exchange of Hong Kong.







**Energy Storage Product Manual** 

Solar Inverter | Battery | Portable Energy Storage | EV Charger

# **A Bright and Exciting Journey**


LESSO Group is a Hong Kong-listed (2128.HK) manufacturer of building materials with an annual revenue of over USD 4.38 billion from its global operations.

Guangdong Lesso Energy Storage Technology Co., Ltd. is a comprehensive energy storage technology integrator that specializes in R&D, production, sales, and after-sales services.

Our comprehensive product line ranges from residential energy storage, portable energy storage, industrial and commercial energy storage, inverters and EV charging equipment to other energy storage products. We are committed to providing safe, efficient, and comprehensive energy storage solutions.





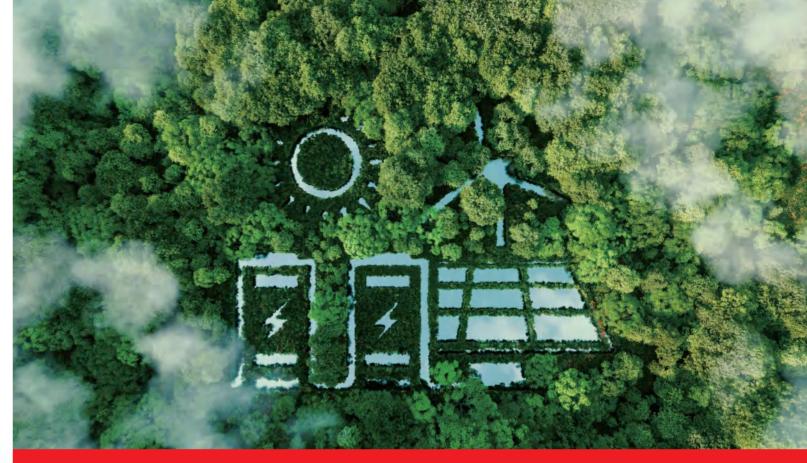

# **Product Certification And Achievements Recognition**











CQC

CE

3C

TUV

**TUVRheinland** 



F©







CB

FCC

PSE

**RoHS** 

UKCA










JL

ETL

UN38.3

**MSDS** 

# **LESSO Solar Global Footprint**

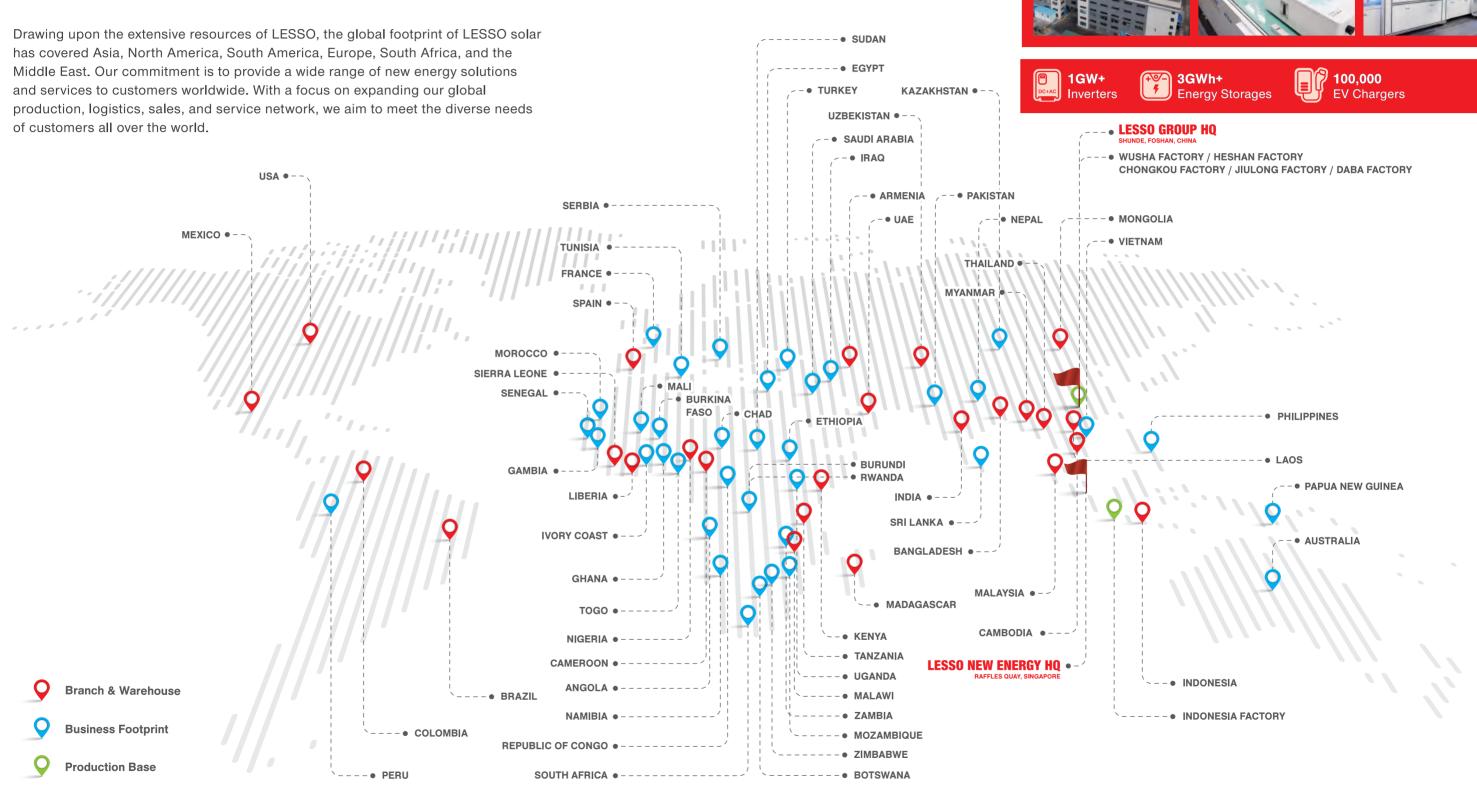

**CHONGKOU FACTORY** 

# **Inverter series**

Safe and Reliable, User-friendly and Economical

- Residential Inverters
- Commercial & Industrial Inverters
- Residential Storage Inverters





# **Micro PV Inverter**

LSMT300TL-H1 LSMT350TL-H1 LSMT400TL-H1

Features

**Protection Functions** 

Design compliance


**Guangdong Lesso Energy Storage Technology Co., Ltd** 

Certificate

### **Micro PV Inverter Highlights**

- 1. Single unit connects up to 1 PV module.
- 2. Maximun 300W/350W/400W AC output power.
- 3. Single phase output, Flexible 3-phase PV system.
- 4. WIFI communication and cloud monitoring.
- 5. Customizable various input (DV PV) voltage range.
- 6. Integrated AC bus cable, ready-To-Use.
- 7. Low cost, easy installation.

#### Single phase connection method of micro inverter

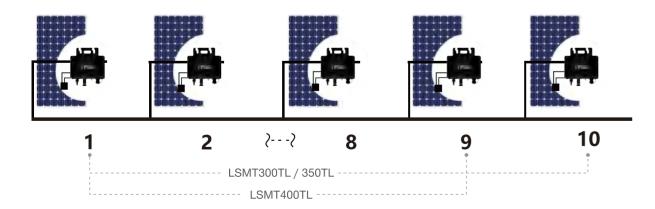

- · LSMT300TL / 350TL Up to 10 units per branch (230V); LSMT400TL Up to 9 units per branch (230V).
- · The VOC of PV modules should not be greater than the max DC input voltage of micro PV inverter

## **LESSO**

	Model	LSMT300TL-H1	LSMT350TL-H1	LSMT400TL-H1		
	Number of input MC4 connector		1 set			
	MPPT voltage range	16V-48V				
DC	Operation voltage range	20-50V				
Input	Maximum Input voltage		50V			
	Startup voltage		18V			
	Maximum input power	300W	350W	400W		
	Maximum input current	12A	14A	16A		
	Single-phase grid type		L,N,PE 120V/230V			
	Rated output power	300W	350W	400W		
	Maximum output power	300W	350W	400W		
	Nominal output current	@	@120VAC:2.5A/@230VAC:1.3	A		
	Nominal output voltage		120VAC /230VAC			
AC Output	Default output voltage range	@120VAC:80V-160V/@230VAC:180V-270V				
Output	Nominal output frequency	50Hz / 60Hz				
	Default output frequency range	@50Hz:48Hz-51Hz/@60Hz:58Hz-61Hz				
	Power Factor	>0.99%				
	Total harmonic distortion	THD <5%				
	Maximum units per branch	@120VAC:5units /300W-350W @230VAC: 10units; 400W @230VAC: 9units				
	Nominal MPPT efficiency	99.5%				
Eiffici- ency	Peak efficiency		95%			
Onloy	Night power consumption		<1W			
	Operating ambient temperature range		-40°C to +65°C			
	Storage temperature range		-40°C to +85°C			
Mecha-	Dimensions (L × W ×H)		195mm x 185mm x 40mm			
nical	Weight		1.6kg			
Data	Max current of AC bus cable		20A			
	Waterproof rating		IP66			
	Cooling mode	Natural convection - no fans				
	Communication		WIFI(cloud monitoring)			
	Power transmission mode	Reverse transfer, load priority				
	Monitoring system		Mobile APP, PC browser			
	Transformer design	High frequ	uency transformers,galvanical	lly isolated		
Other	Integrated ground	1 1 0	ound is provided by the PE in			



**Micro PV Inverter** 



No additional ground is required

Isolated island protection, voltage protection, frequency protection,

temperature protection, current protection, etc.

EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021,

EN IEC55014-2:2021

CE




# **Micro PV Inverter**

LSMT600TL-H1 LSMT700TL-H1 LSMT800TL-H1

### **Micro PV Inverter Highlights**

- 1. Single unit connects up to 2 PV module.
- 2. Maximun 600W/700W/800W AC output power.
- 3. Single phase output, Flexible 3-phase PV system.
- 4. WIFI communication and cloud monitoring.
- 5. Customizable various input (DV PV) voltage range.
- 6. Integrated AC bus cable, ready-To-Use.
- 7. Low cost, easy installation.

### Single phase connection method of micro inverter

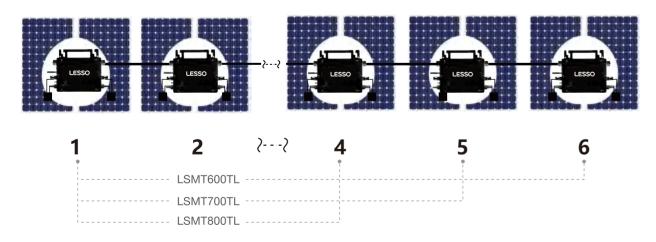

- · LSMT600TL Up to 6 units per branch (230V); LSMT700TL Up to 5 units per branch (230V); LSMT800TL Up to 4 units per branch (230V).
- $\cdot$  The VOC of PV modules should not be greater than the max DC input voltage of micro PV inverter.

# **LESSO**

### **Micro PV Inverter**

М	lodel	LSMT600TL-H1	LSMT700TL-H1	LSMT800TL-H1			
N	umber of input MC4 connector		2 sets				
M	IPPT voltage range		22V-48V				
DC O	peration voltage range	20-50V					
Input M	laximum Input voltage		52V				
St	tartup voltage	18V					
M	laximum input power	600W	700W	800W			
М	laximum input current	12A*2	14A*2	16A*2			
Si	ingle-phase grid type		L,N,PE 120V/230V				
Ra	ated output power	600W	700W	800W			
M	laximum output power	600W	700W	800W			
No	ominal output current	@120VAC:5A @230VAC:2.6A	@120VAC:5.8A @230VAC:3A	@120VAC:6A @230VAC:3.5A			
	ominal output voltage		120VAC /230VAC				
AC De	efault output voltage range	@120V	AC:80V-160V/@230VAC:180	V-270V			
Output	ominal output frequency		50Hz / 60Hz				
De	efault output frequency range	@50H	Hz:48Hz-51Hz/@60Hz:58Hz-6	S1Hz			
Po	ower Factor		>0.99%				
To	otal harmonic distortion	THD <5%					
M	laximum units per branch	LSMT600TL-H1: @120VAC:3units /@230VAC: 6units LSMT700TL-H1: @120VAC:3units /@230VAC: 5units LSMT800TL-H1: @120VAC:3units /@230VAC: 4units					
	ominal MPPT efficiency		99.5%				
Eiffici-	eak efficiency	95%					
ency Ni	ight power consumption		<1W				
O	perating ambient temperature range		-40°C to +65°C				
St	torage temperature range		-40°C to +85°C				
Mecha- Di	imensions (L × W ×H)	230mm x 185mm x 45mm					
	/eight	2kg					
Data M	lax current of AC bus cable		20A				
W	aterproof rating		IP66				
Co	ooling mode		Natural convection - no fans				
Co	ommunication		WIFI(cloud monitoring)				
Po	ower transmission mode	F	Reverse transfer, load priority	1			
M	lonitoring system		Mobile APP, PC browser				
Tr	ransformer design	High frequ	ency transformers,galvanical	lly isolated			
Other Features	itegrated ground		ound is provided by the PE in additional ground is require				
Pr	rotection Functions		rection,voltage protection, fre ure protection, current protec				
De	esign compliance	EN IEC61000-3-2:2019	9+A1:2021, EN 61000-3-3:20 <sup>-1</sup> EN IEC55014-2:2021	13+A1:2019+A2:2021,			
	ertificate	EN IEC55014-2:2021 CE					







**Guangdong Lesso Energy Storage Technology Co., Ltd** 



# **Micro PV Inverter**


LSMT1200TL-H1 LSMT1400TL-H1 LSMT1600TL-H1 LSMT2000TL-H1

### **Micro PV Inverter Highlights**

- 1. Single unit connects up to 4 PV module.
- 2. Maximun 1200W/1400W/1600W/2000W AC output power.
- 3. Single phase output, Flexible 3-phase PV system.
- 4. WIFI communication and cloud monitoring.

- 5. Customizable various input (DV PV) voltage range.
- 6. Integrated AC bus cable, ready-To-Use.
- 7. Low cost, easy installation.

### Single phase connection method of micro inverter

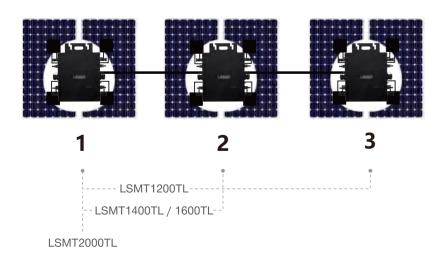

- · LSMT1200TL Up to 3 units per branch (230V); LSMT1400TL Up to 2 units per branch (230V); LSMT1600TL Up to 2 units per branch (230V); LSMT2000TL Up to 1 units per branch (230V).
- $\cdot$  The VOC of PV modules should not be greater than the max DC input voltage of micro PV inverter.


### **LESSO**

### **Micro PV Inverter**

Number of Input MC4 connector   4 sets		Model	LSMT1200TL-H1	LSMT1400TL-H1	LSMT1600TL-H1	LSMT2000TL-H1	
DC		Number of input MC4 connector		4 s	ets		
Maximum Input voltage   22V		MPPT voltage range		22V-	-48V		
Startup voltage	DC	Operation voltage range	18-60V				
Maximum input power   1200W   1400W   1600W   2000W	Input	Maximum Input voltage		60	V		
Maximum input current   12A'4		Startup voltage		22	2V		
Single-phase grid type		Maximum input power	1200W	1400W	1600W	2000W	
Rated output power		Maximum input current	12A*4	14A*4	15A*4	16A*4	
Maximum output power   1200W		Single-phase grid type		L,N,PE 12	20V/230V		
Nominal output current		Rated output power	1200W	1400W	1600W	2000W	
Nominal output outrent  AC Output  Nominal output voltage  Default output voltage range Nominal output voltage range Nominal output voltage range Default output frequency Default output frequency range  Power Factor Total harmonic distortion  LSMT1200TL-H1: @120VAC:2units /@230VAC: 4units LSMT1200TL-H1: @120VAC:2units /@230VAC: 4units LSMT1200TL-H1: @120VAC:2units /@230VAC: 4units LSMT1200TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²) LSMT200TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²) Pose cable and accuse		Maximum output power	1200W	1400W	1600W	2000W	
Default output voltage range Nominal output frequency Default output frequency Default output frequency range Power Factor Total harmonic distortion  Maximum units per branch Effficiency Night power consumption Default ambient temperature range Storage temperature range Dimensions (L × W × H) Weight Max current of AC bus cable Waterproof rating Cooling mode Communication Data Other Features Other Features Design compliance Design compliance  Desi		Nominal output current					
Default output voltage range Nominal output frequency Default output frequency Default output frequency Nominal output frequency range Power Factor Total harmonic distortion Maximum units per branch Effficiency Peak efficiency Night power consumption Default output frequency range Power Factor  Nominal MPPT efficiency Peak efficiency Night power consumption Mechanical Data Data Data Data Other Features Other Features Design compliance Design compliance  Design compliance  Design compliance  Design compliance  Design compliance  Design compliance  Design compliance  Design compliance  Design compliance  Nonditoring Storage tenger ange Storage anger anger Storage anger anger Storage anger anger Storage ange		Nominal output voltage		120VAC	/230VAC		
Nominal output frequency   SoHz / 60Hz		Default output voltage range		@120VAC:80V-160V/	@230VAC:180V-270V		
Power Factor Total harmonic distortion  THD <5%  LSMT1200TL-H1: @120VAC:2units /@230VAC: 4units  Maximum units per branch  LSMT1400TL/ 1600TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²)  LSMT2000TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²)  LSMT2000TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²)  REIfficiency Peak efficiency Peak efficiency Peak efficiency Night power consumption  Operating ambient temperature range Storage temperature range 40°C to +65°C  Storage temperature range 40°C to +85°C  Dimensions (L × W × H) 255mm x 340mm x 45mm  Weight As current of AC bus cable Waterproof rating Cooling mode Natural convection - no fans  Communication Power transmission mode Monitoring system No additional ground is required  No additional ground is required  Protection Functions  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021	Output	Nominal output frequency		50Hz ,	/ 60Hz		
Total harmonic distortion  THD <5%  LSMT1200TL-H1: @120VAC:2units /@230VAC: 4units  Maximum units per branch  LSMT1400TL / 1600TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²)  LSMT2000TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²)  Nominal MPPT efficiency Peak efficiency Night power consumption  Operating ambient temperature range 40°C to +65°C Storage temperature range Storage temperature range 40°C to +85°C  Dimensions (L × W × H) 255mm x 340mm x 45mm  Weight Max current of AC bus cable Waterproof rating Cooling mode Natural convection - no fans  Communication Power transmission mode Monitoring system Transformer design High requency transformers, galvanically isolated  Equipment ground is provided by the PE in the AC cable. No additional ground is required  Protection Functions  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Default output frequency range		@50Hz:48Hz-51Hz,	/@60Hz:58Hz-61Hz		
LSMT1200TL-H1: @120VAC:2units /@230VAC: 4units   LSMT1400TL / 1600TL-H1: @120VAC:2units /@230VAC: 4units   LSMT1400TL / 1600TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²)   LSMT2000TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²)   LSMT200VAC: 4units (AC cable 3*2.5mm		Power Factor		>0.0<	99%		
Maximum units per branch  LSMT1400TL / 1600TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²) LSMT2000TL-H1: @120VAC:2units /@230VAC: 1units (AC cable 3*2.5mm²) LSMT2000TL-H1: @120VAC:2units /@230VAC: 1units (AC cable 3*2.5mm²)  Nominal MPPT efficiency 99.5% Peak efficiency Night power consumption  Operating ambient temperature range 40°C to +65°C Storage temperature range Dimensions (L × W × H) 255mm x 340mm x 45mm Weight Max current of AC bus cable Waterproof rating Cooling mode Natural convection - no fans  Communication Power transmission mode Reverse transfer, load priority Monitoring system Transformer design High frequency transformers,galvanically isolated  Equipment ground is provided by the PE in the AC cable. No additional ground is required  Protection Functions  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC65014-2:2021		Total harmonic distortion		THD	<5%		
Eifficiency Night power consumption Operating ambient temperature range Storage temperature range Dimensions (L × W × H) Weight Max current of AC bus cable Waterproof rating Cooling mode Communication Power transmission mode Monitoring system Transformer design Integrated ground Other Features  Peak efficiency Night power consumption  A1W Operating ambient temperature range A40°C to +65°C Storage temperature range A40°C to +85°C Dimensions (L × W × H) Storage A40°C to +85°C Dimensions (L × W × H) Storage A40°C to +65°C A40°C		Maximum units per branch	LSMT1400TL / 1600TL-H1: @120VAC:2units /@230VAC: 4units (AC cable 3*2.5mm²)				
Peak efficiency Night power consumption  Operating ambient temperature range  Au°C to +65°C  Storage temperature range  Dimensions (L × W × H)  Weight  Aux current of AC bus cable  Waterproof rating  Cooling mode  Communication  Power transmission mode  Monitoring system  Transformer design  Integrated ground  Other Features  Protection Functions  Design compliance  Peak efficiency  95%  ATW  AUW  AUW  AUW  AUW  AUW  AUW  AUW		Nominal MPPT efficiency		99.	5%		
Night power consumption  Operating ambient temperature range  4-40°C to +65°C  Storage temperature range  Dimensions (L × W × H)  Weight  Max current of AC bus cable  Waterproof rating  Cooling mode  Cooling mode  Communication  Power transmission mode  Monitoring system  Transformer design  Integrated ground  Other Features  Other Features  Design compliance  Night power consumption <a href="#">&lt; 40°C to +65°C</a> 40°C to +85°C  Dimensions (L × W × H)  255mm x 340mm x 45mm  3.5kg  3.5kg  Max current of AC bus cable  20A  Waterproof rating  IP66  Cooling mode  Natural convection - no fans  WIFI(cloud monitoring)  Power transmission mode  Reverse transfer, load priority  Monitoring system  High frequency transformers, galvanically isolated  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Integrated ground  Equipment ground is provided py the PE in the AC cable.  No additional ground is required  Explicated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  Design compliance  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Peak efficiency	95%				
Storage temperature range  Dimensions (L × W ×H)  Dimensions (L × W ×H)  Weight  Storage temperature range  Dimensions (L × W ×H)  Weight  Storage temperature range  Dimensions (L × W ×H)  Weight  Storage temperature range  Dimensions (L × W ×H)  Storage temperature range  Dimensions (L × W ×H)  Storage temperature range  A0°C to +85°C  255mm x 340mm x 45mm  3.5kg  3.5kg  By B	Cricy	Night power consumption		<1	W		
Dimensions (L × W ×H)  Weight  3.7kg  3.5kg  3.5kg  Max current of AC bus cable  Waterproof rating  Cooling mode  Cooling mode  Communication  Power transmission mode  Monitoring system  Transformer design  Integrated ground  Cother Features  Protection Functions  Design compliance  Dimensions (L × W ×H)  3.7kg  3.5kg  3.5kg  3.5kg  Antique Cooling mode  Natural convection - no fans  WIFI(cloud monitoring)  Reverse transfer, load priority  Mobile APP, PC browser  High frequency transformers,galvanically isolated  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Isolated island protection,voltage protection, frequency protection, temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Operating ambient temperature range		-40°C to	o +65°C		
Meight Data  Weight  Max current of AC bus cable  Waterproof rating  Cooling mode  Cooling mode  Communication  Power transmission mode  Monitoring system  Transformer design  Other Features  Other Features  Protection Functions  Meight  3.7kg  3.5kg  20A  Natural convection - no fans  WIFI(cloud monitoring)  Reverse transfer, load priority  Mobile APP, PC browser  High frequency transformers, galvanically isolated  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Storage temperature range		-40°C to	) +85°C		
Data  Max current of AC bus cable  Waterproof rating  Cooling mode  Natural convection - no fans  Communication  Power transmission mode  Monitoring system  Monitoring system  Transformer design  Other Features  Other Features  Protection Functions  Design compliance  Max current of AC bus cable  20A  20A  20A  Ple6  Reverse transfer, load priority  Molic APP, PC browser  High frequency transformers, galvanically isolated  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021	Mecha-	Dimensions (L × W ×H)		255mm x 340	Omm x 45mm		
Waterproof rating  Waterproof rating  Cooling mode  Natural convection - no fans  Communication  WiFl(cloud monitoring)  Power transmission mode  Reverse transfer, load priority  Monitoring system  Transformer design  High frequency transformers, galvanically isolated  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Protection Functions  Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  Design compliance  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021	nical	Weight	3.7	<sup>7</sup> kg	3.5	ōkg	
Cooling mode  Communication  WiFl(cloud monitoring)  Power transmission mode  Monitoring system  Monitoring system  Transformer design  Integrated ground  Protection Functions  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021	Data	Max current of AC bus cable		20	20A		
Communication  Power transmission mode  Reverse transfer, load priority  Monitoring system  Monitoring system  Transformer design  Integrated ground  Protection Functions  MIFI(cloud monitoring)  Reverse transfer, load priority  Mobile APP, PC browser  High frequency transformers, galvanically isolated  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Waterproof rating		IP	66		
Power transmission mode  Reverse transfer, load priority  Mohile APP, PC browser  Transformer design  High frequency transformers,galvanically isolated  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Integrated ground  Protection Functions  Isolated island protection,voltage protection, frequency protection, temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Cooling mode		Natural conve	ction - no fans		
Monitoring system Transformer design High frequency transformers, galvanically isolated  Equipment ground is provided by the PE in the AC cable. No additional ground is required  Protection Functions Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Communication		WIFI(cloud	monitoring)		
Transformer design  Other Features  Integrated ground  Equipment ground is provided by the PE in the AC cable.  No additional ground is required  Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Power transmission mode		Reverse transf	er, load priority		
Other Features  Integrated ground  Equipment ground is provided by the PE in the AC cable. No additional ground is required  Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  Design compliance  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Monitoring system		Mobile APP,	PC browser		
Other Features  No additional ground is required  No additional ground is required  Isolated island protection, voltage protection, frequency protection, temperature protection, current protection, etc.  Design compliance  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Transformer design	F	ligh frequency transform	ners,galvanically isolate	ed	
Protection Functions temperature protection, current protection, etc.  EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC55014-2:2021		Integrated ground	Equip	0 1	,	cable.	
EN IEC55014-2:2021		Protection Functions					
0.05		Design compliance	EN IEC61000			019+A2:2021,	
Certificate CE		Certificate		C	E		







**Guangdong Lesso Energy Storage Technology Co., Ltd** 



# **PV** Inverter

LSBH (6~30) KTL3-OC1

	Product Model	LSBH6KTL3-OC1	LSBH8KTL3-OC1	LSBH10KTL3-OC1	LSBH12KTL3-OC1	LSBH15KTL3-OC1	LSBH17KTL3-OC1	
	Max. DC Input Power	7800W	10400W	13000W	15600W	19500W	22600W	
	Max. DC Input Voltage	1100V						
	Max. DC Input Current		18/	18A		18,	/30A	
Input	MPPT Voltage Range			180~	1000V			
	Recommended Working Voltage			65	50V			
	MPPT Number			:	2			
	Max. Input Strings per MPPT		1/	<b>′1</b>		1	/2	
	Rated Output Power	6000W	8000W	10000W	12000W	15000W	17000W	
	Max. AC Power	6.6kVA	8.8kVA	11kVA	13.2kVA	16.5kVA	18.7kVA	
	Max. Output Current	10A	13.3A	16.7A	20A	25A	28.3A	
	Rated Power Grid Voltage			40	0V			
Outnut	Power Grid Voltage Range			310~4	80Vac			
Output	Rated Power Grid Frequency			50Hz,	/60Hz			
	Grid Frequency Range	45~55Hz/55~65Hz						
	THD	<2% (under rated power)						
	Power Factor	>0.99 (under rated power) / Adjustable range0.8(leading)~0.8(lagging)						
	DC Component			<0.5% (under	rated power)			
	Max. Efficiency	98.5%	98.5%	98.6%	98.7%	98.7%	98.7%	
	Euro. efficiency	98%	98%	98.2%	98.1%	98.2%	98.2%	
	Humidity			0~100%, no	condensation			
	Cooling			Fa	an			
System Data	Ambient Temperature Range			-25~-	-60°C			
Data	Consumption During Night			<1	W			
	Altitude			400	00m			
	Display			LED/LCD	(optional)			
	Communication Interface			RS485/GPRS	/Wifi (optional)			
	Size	427x510x190mm 427x439				212mm		
Mechanical Data	Weight	15kg 18kg						
	Protection Level			IP	IP66			
0	Standards for Grid Connection			NB/T 32004-20	)18; IEC61727			
Conforming Standards	Safety Standard			NB/T 32004-201	8; EC 62109-1/2			
	EMC			IEC610	00-6-2/4			

**LESSO PV Inverter** 

	Product Model	LSBH20KTL3-OC1	LSBH23KTL3-OC1	LSBH25KTL3-OC1	LSBH28KTL3-OC1	LSBH30KTL3-OC1	
	Max. DC Input Power	26000W	29900W	32500W	36400W	36000W	
	Max. DC Input Voltage	1100V					
	Max. DC Input Current	30/3	80A	36/30A	36/36A	36/36A	
Input	MPPT Voltage Range			180~1000V			
	Recommended Working Voltage			650V			
	MPPT Number			2			
	Max. Input Strings per MPPT			2/2		2/2	
	Rated Output Power	20000W	23000W	25000W	28000W	30000W	
	Max. AC Power	22kVA	25.3kVA	27.5kVA	30.8kVA	33kVA	
	Max. Output Current	32A	36.5A	42A	45A	48A	
	Rated Power Grid Voltage			400V			
	Power Grid Voltage Range			310~480Vac			
Output	Rated Power Grid Frequency	50Hz/60Hz					
	Grid Frequency Range	45~55Hz/55~65Hz					
	THD	<2% (under rated power)					
	Power Factor	>0.99 (under rated power) / Adjustable range0.8(leading)~0.8(lagging)					
	DC Component			<0.5% (under rated power	)		
	Max. Efficiency	98.7%	98.8%	98.8%	98.8%	98.8%	
	Euro. efficiency	98.2%	98.2%	98.2%	98.2%	98.2%	
	Humidity	0~100%, no condensation					
	Cooling	Fan					
System Data	Ambient Temperature Range	-25~+60°C					
Dutu	Consumption During Night	<1W					
	Altitude	4000m					
	Display			LED/LCD (optional)			
	Communication Interface		F	RS485/GPRS/Wifi (optiona	al)		
	Size			427*439*212mm			
Mechanical Data	Weight			18kg			
	Protection Level			IP66			
	Standards for Grid Connection		N	B/T 32004-2018; IEC617	27		
Conforming Standards	Safety Standard		NB/	T 32004-2018; EC 62109	<del>)-</del> 1/2		
	EMC			IEC61000-6-2/4			

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed







# LSBH (18-30)KTL3LV-0C1

# **On-grid PV Inverter**


Items	LSBH18KTL3LV-OC1	LSBH20KTL3LV-OC1	LSBH25KTL3LV-OC1	LSBH30KTL3LV-OC1	
DC Input Data					
Max. DC input power	27000W	30000W	37500W	45000W	
Max. DC input voltage		1000	VDC		
Max. DC input current	30/30/	30/30A	36/36/20/20A		
MPPT voltage range		180~10	000VDC		
Recommended working voltage	650VDC				
MPPT number	4				
Max. input strings per MPP tracker	2				

# LESSO

# **On-grid PV Inverter**

Items	LSBH18KTL3LV-OC1	LSBH20KTL3LV-OC1	LSBH25KTL3LV-OC1	LSBH30KTL3LV-OC1	
AC Output Data					
Rated output power	18000W	20000W	25000W	30000W	
Max. AC power	19.8kVA	22kVA	27.5kVA	33kVA	
Max. output current	51.9A	57.7A	72.1A	86.6A	
Rated power grid voltage		40	0V		
Power grid voltage range		310	480		
Rated power grid frequency		50Hz,	/60Hz		
Grid frequency range		45~55Hz,	/55~65Hz		
THD		<2%(Under th	e rated power)		
Power factor	>0.99(Und	er rated power)/Adjustab	ole range0.8(Leading)~0.	.8(Lagging)	
DC component		<0.5%(Under	rated power)		
System Data					
Max. Efficiency(%)	98.7%	98.7%	98.7%	98.7%	
Euro. efficiency(%)	98.2%	98.1%	98.2%	98.2%	
Humidity		0~100%, No	condensation		
Cooling		Fa	an		
Allowed ambient temperature range		-25°C^	+60°C		
Consumption during night		<1	W		
Altitude allowed		400	00m		
Communication interface		RS485/WIFI/G	iPRS((optional)		
Display		LED/LCD	(optional)		
Mechanical Data					
Size (width x height x depth)		610mm×564	mm×218mm		
Weight	39kg				
Protection class	IP66				
Conforming standards					
Standards for grid connection	NB/T32004-2018;IEC61727				
Safety standard		NB/T32004-201	8; IEC62109-1/2		
EMC		IEC610	00-6-2/4		



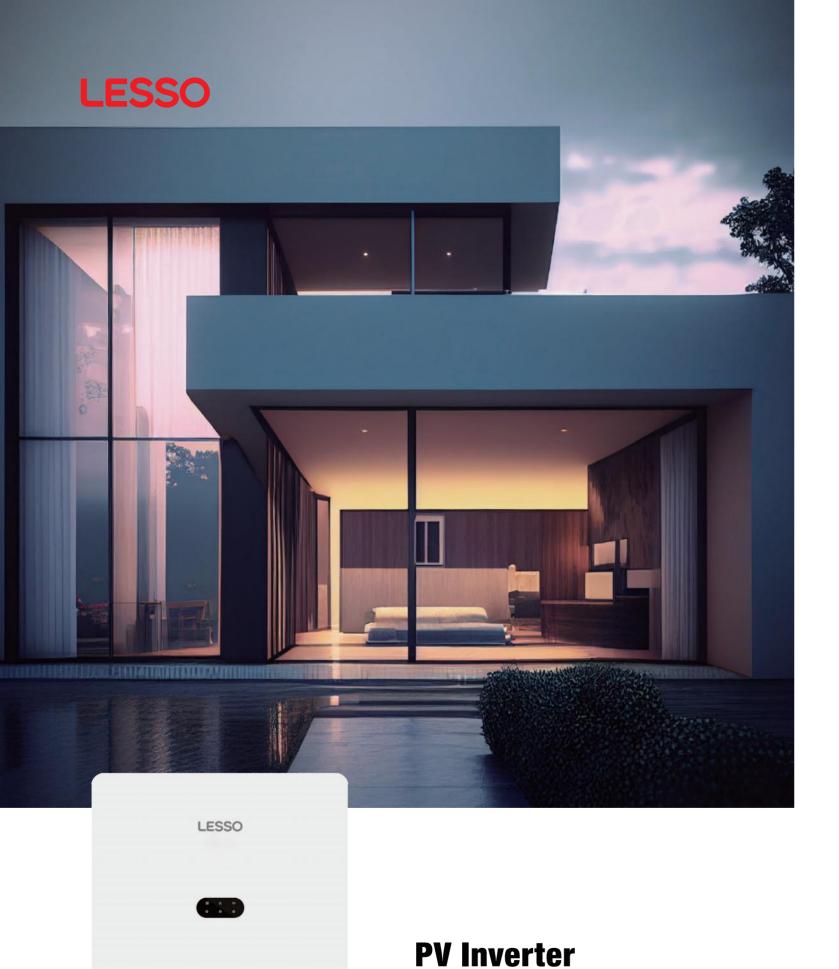

LSBH (33~50) KTL3-OC1

LESSO PV Inverter

	Product Model	LSBH33KTL3-OC1	LSBH36KTL3-OC1	LSBH40KTL3-OC1	LSBH50KTL3-OC1		
	Max. DC Input Power	39600W	43200W	48000W	60000W		
	Max. DC Input Voltage	1100V					
	Max. DC Input Current	36A/36A/20A 36A/36A/20A/20A					
Input	MPPT Voltage Range		200~10	00Vdc			
	Recommended Working Voltage		650	)V			
	MPPT Number	3		4			
	Max. Input Strings per MPPT	2/2/2		2/2/2/2			
	Rated Output Power	33000W	36000W	40000W	50000W		
	Max. AC Power	36.3kVA	39.6kVA	44kVA	55kVA		
	Max. Output Current	53A	56A	65A	80A		
	Rated Power Grid Voltage		400	V			
	Power Grid Voltage Range		310~48	30Vac			
Output	Rated Power Grid Frequency	50Hz/60Hz					
	Grid Frequency Range	45~55Hz/55~65Hz					
	THD		<2% (under ra	ated power)	ed power)		
	Power Factor	>0.	1)				
	DC Component	<0.5% (under rated power)					
	Max. Efficiency	98.6%	98.6%	98.6%	98.7%		
	Euro. efficiency	98.1%	98.1%	98.2%	98.2%		
	Humidity		0~100%, no c	ondensation			
	Cooling		Fa	n			
System	Ambient Temperature Range		-25~+	0°C			
Data	Consumption During Night		<1\	N			
	Altitude		4000	)m			
	Display		LED/LCD	(optional)			
	Communication Interface		RS485/GPRS/	Wifi (optional)			
	Size		610 x 564	x 218mm			
/lechanical Data	Weight		37kg		39kg		
	Protection Level		IP6	6			
	Standards for Grid Connection		NB/T 32004-20	18; IEC61727			
Conforming Standards	Safety Standard		NB/T 32004-2018	; EC 62109-1/2			
	EMC		IEC6100	0-6-2/4			

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed





# LSBH (36-50)KTL3LV-0C1

# **On-grid PV Inverter**

Items	LSBH36KTL3LV-OC1	LSBH40KTL3LV-OC1	LSBH50KTL3LV-OC1	
DC Input Data				
Max. DC input power	54000W	60000W	75000W	
Max. DC input voltage				
Max. DC input current	40/40/20/	40/40/20A	40/40/20/20/40/40/20/20A	
MPPT voltage range		180~1000VDC		
Recommended Max Power working voltage	550~850VDC			
MPPT number	6	8		
Max. input strings per MPP tracker	2			

# **LESSO**

# **On-grid PV Inverter**

Items	LSBH36KTL3LV-OC1	LSBH40KTL3LV-OC1	LSBH50KTL3LV-OC1		
AC Output Data					
Rated output power	36000W	40000W	50000W		
Max. AC power	39.6kVA	44kVA	55kVA		
Max. output current	103.9A	115.4A	144.3A		
Rated power grid voltage		43/(N)/PE, 220V			
Power grid voltage range		170-265Vac			
Rated power grid frequency		50Hz/60Hz			
Grid frequency range		47.5~52.5Hz/57.5~62.5Hz			
THD		<3%(Under the rated power)			
Power factor	>0.99(Under rated	power)/Adjustable range0.8(Lead	ding)~0.8(Lagging)		
DC component		<0.5%(Under rated power)			
System Data					
Max. Efficiency(%)	98.7%	98.7%	98.8%		
Euro. efficiency(%)	98.1%	98.2%	98.2%		
Humidity		0~100%, No condensation			
Cooling		Fan			
Allowed ambient temperature range		-25°C~+60°C			
Consumption during night		<1W			
Altitude allowed		4000m			
Communication interface		RS485/WIFI/GPRS((optional)			
Display		LED/LCD(optional)			
Mechanical Data					
Size (width x height x depth)		1160mm×611mm×286mm			
Weight	92kg				
Protection class		IP66			
Conforming standards					
Standards for grid connection		NB/T32004-2018;IEC61727			
Safety standard		NB/T32004-2018; IEC62109-1/2			
EMC		IEC61000-6-2/4			







**LESSO PV Inverter** 

Product Model	LSBH 80KTL3-OC1	LSBH 90KTL3-OC1	LSBH 100KTL3-OC1	LSBH 110KTL3-OC1	LSBH 125KTL3-OC1
DC Input Data					
Max. DC input power	120kW	135kW	150kW	165kW	187.5kW
Max. DC input voltage			1100VDC		
Max. DC input current	30A*8	30A*9	30A*10	30A*10	30A*10
MPPT voltage range			200~1000VDC		
Recommended working voltage			600VDC		
MPPT number	8	9	10	10	10
Max. input strings per MPP tracker			2		
AC Output Data					
Rated output power	80kW	90kW	100kW	110kW	125kW
Max. AC power	88kVA	99kVA	110kVA	121kVA	137.5kVA
Max. output current	127A	142.9A	158.8A	174.6A	199.3A
Rated power grid voltage			400Vac		
Power grid voltage range			310~480Vac		
Rated power grid frequency			50Hz/60Hz		
Grid frequency range			45~55Hz/55~65Hz		
THD			<2%(Under the rated power)		
Power factor		>0.99(Under rated p	ower)/Adjustable range 0.8(Leadi	ng)~0.8 (Lagging)	
DC component			<0.5%(Under rated power)		
System Data					
Max. Efficiency		98.	70%		98.90%
Euro. Efficiency		98.	30%		98.20%
Humidity			0~95%, No condensation		
Cooling			Fan		
Allowed ambient temperature range			-25°C~+60°C		
Consumption during night			<1W		
Max. altitude	4000m (It needs to be derated when the altitude exceeds 2000m)				
Mechanical Data					
Size (width x height x depth)	1050×620×333mm				
Weight	89kg				
Protection class	IP66 (outdoor)				
Display & Communication					
Communication interface	RS485/WIFI(optional)/GPRS(optional)				
Display			LED/LCD(optional)		

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed





# LSBH (225-230)KTL3HV-0C1

# **On-grid PV Inverter**

Items	LSBH225KTL3HV-OC1	LSBH230KTL3HV-OC1		
Import				
Maximum DC input power	337.5kW			
Maximum DC input voltage	1500VDC			
Maximum DC input current	40A	*12A		
MPPT Voltage Range	500~15	500VDC		
Recommended MPP Operating Voltage	1080VDC			
MPPT quantity	12			
Max. input string number per MPPT	2			

# **LESSO**

# **On-grid PV Inverter**

Items	LSBH225KTL3HV-OC1	LSBH230KTL3HV-OC1
Output		
Rated output power	225kW	230kW
Maximum output power	247.5kW	253kW
Maximum output current	178.7A	182.6A
Rated Grid Voltage	800	OV
Power Grid Voltage Range	640~9	20Vac
Rated power grid frequency	50Hz/	60Hz
Power grid frequency range	45~55Hz/	55~65Hz
THD	<2% (rated	power rate)
Power factor	> 0.99 (rated power) / adjustable ran	ge 0.8 (advance) ~0.8 (Lagging lag)
DC component	<0.5% (rate	ed power)
System		
Max. Efficiency	99.0	2%
Euro. efficiency	98.5	2%
Humidity	0~100%, with n	o condensation
Cooling	Intelligent speed con	ditioning air cooling
Allowed ambient temperature range	-25°C~	+60°C
Consumption during night	<2	w
Max. working altitude	5000m (> 40	000m drop)
Display	LED / LCD	(optional)
Communication interface	RS485 / WIFI / C	GPRS (Optional)
Mechanical		
Size (width x height x depth)	1008mm×700	mm×351mm
Weight	107	rkg
Protection class	IP6	66
Standard		
Grid-connected standards	NB/T32004-20	018;IEC61727
Safety standards	NB/T32004-2018	3; IEC62109-1/2
electromagnetic compatibility	IEC6100	00-6-2/4







# **Residential Off-grid Inverter**

### Features

- The front and rear stage dual control chip and drive chip adopt the new imported intelligent control chip, better anti-interference ability,more stable and durable performance.
- The power device adopts the new imported IGBT-MOS tube, with guaranteed quality, stronger performance and stronger impact resistance.
- The heat dissipation effect of independent aluminum alloy radiator is better, so as to achieve the purpose of higher conversion efficiency.
- Heat dissipation fan adopts double ball high-speed fan for faster heat dissipation and longer service life.
- The transformer coil adopts a pure copper strip winding system, which ensures a high conversion efficiency.
- USB charging function of the device built-in fast charging protocol chip to improve the charging speed, and there is a built-in output over voltage protection circuit to protect our charging equipment.

### **Appearance**

- Aluminum alloy shell, fireproof
- LED display
- One button switch
- QC2.0/5V USB interface
- AC socket




### **Residential Off-grid Inverter**


Product Model	LSOT300	LSOT600	LSOT1K	LSOT1K5	LSOT2K	LSOT2K5	LSOT3K
Output Power	300W	600W	1000W	1500W	2000W	2500W	3000W
Peak Power	600W	1200W	2000W	3000W	4000W	5000W	6000W
Input Voltage				12V/24V/48V/60V			
Output Voltage			100V/11	10V/120V/220V/230	0V/240V		
Output Frequency				50Hz/60Hz			
Output Wave				Pure sine wave			
Convert Efficiency				95%			
Dimensions	230×120×70mm	250×119×70mm	310×216×95mm	350×216×95mm	426×216×95mm	426×216×95mm	520×218×95mm
Voltage							
12V Series			Operat	ing voltage range 9.	5V-16V		
24V Series	Operating voltage range 20V-30V						
48V Series	Operating voltage range 40V-60V						
60V Series			Operat	ing voltage range 48	3V-72V		


Remarks: Specifications are subject to change without notice.

#### Battery connection diagram

























# **LGA-HJ Series**

# **Off-grid Inverter**

LGA-HJ series is a high-frequency pure sine wave inverter that can convert 12/24/48VDC to 220/230/240VAC (or 100/110/120VAC) and power the AC loads. It is designed according to the international standard with higher quality, reliability, and safety. Ranging from 350W to 5000W, LGA-HJ series is compatible with lithium-ion battery perfectly and suits any situation of DC to AC, such as RVs, boats, residentials, and places where require high quality of electrical power.

#### **Features**

- Pure sine wave output
- Input to output electrical isolation
- Digital dual closed-loop control of voltage and current
- Input surge current suppression for lithium battery systems
- Output power factor up to 1
- Simple system wiring & 180 degrees rotating LCD
- Input Protection: Reverse polarity, Low-voltage, Over-voltage
- Output Protection: Overload, Short circuit, Overheating
- Phone and PC remote control through RS485 port
- Extra external switch port
- Safety (EN/IEC62109) & EMC approved by international standards









Solar Car

Solar Home

Solar Boat

Solar Power Generator





Parameters	LGA- 351ALC1-HJ	LGA- 351BLC1-HJ	LGA- 501ALC1-HJ	LGA- 501BLC1-HJ	LGA- 102ALC1-HJ	LGA- 102BLC1-HJ	LGA- 102DLC1-HJ	
Continuous Output Power	350W@35°C@ Ra	ated input voltage	500W@35°C@ Ra	1000W@35°C@ Rated input voltage				
Surge Power	700V	700W@5S 1000W@5S				2000W@5S		
Surge Current When Power On	<3	0A	<5	0A	<10	00A	<35A	
Output Voltage		•	0VAC (±3%); 7%~+3%)		•	0VAC (±3%); -7%~+3%)	100VAC/110VAC /120VAC (±3%)	
Output Frequency				50/60Hz ± 0.2%				
Output Wave				Pure Sine Wave				
Output Distortion THD	THD ≤ 4% (Resistive load)	THD ≤ 3% (Resistive load)	THD ≤ 4% (R	esistive load)	THD ≤ 4% (Resistive load)	THD ≤ 3% (Resistive load)	THD ≤ 3% (Resistive load)	
Load Power factor			0.2~1 (Lad po	wer ≤ Continuous	output power)			
Rated Input Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	48VDC	
Input Voltage Range	10.8~16.0VDC	21.6~32VDC	10.8~16.0VDC	21.6~32VDC	10.8~16.0VDC	21.6~32.0VDC	43.2~64.0VDC	
Rated Output Efficiency①	>87.0%	>90.0%	>87.5%	>90.0%	>87.0%	>90.0%	>91.0%	
Max. Output Efficiency②	>89.0% (70% loads)	>90.5% (70% loads)	>90.0% (40% loads)	>91.0% (40% loads)	>92.0% (40% loads)	>92.5% (30% loads)	>92.5% (40% loads)	
Idle Current	<0.15A	<0.10A	<0.15A	<0.10A	<0.2A	<0.15A	<0.1A	
No-load Current	<0.8A	<0.4A	<0.8A	<0.5A	<0.8A	<0.6A	<0.5A	
USB Output			5VDC/N	Лах.1А			_	
RS485 com.prt				5VDC/200mA				
Input Terminal				M6				
Dimension (L*W*H)	(with decor 229×160	.5×75mm ative cover) J×73mm orative cover)	286×163.5×78mm (with decorative cover) 286×160×78mm (without decorative cover)		371×231.5×123mm		332×231.5×123 mm	
Mounting Size (L*W)	205×7	205×75mm 262×75mm			345×1	45mm	306×145mm	
Mounting Hole Size		Ф5	mm			Ф6mm		
Net Weight	1.4	7kg	2.0	0kg	5.15kg	4.86kg	4.36kg	

① It is measured in the condition of continuous output power and rated input voltage.





② It means the max. output efficiency when the inverter is connected with different loads under the rated input voltage.

Remarks: Specifications are subject to change without notice.

LESSO Off-grid Inverter

Parameters	LGA-152ALC1-HJ	LGA-152BLC1-HJ	LGA-152DLC1-HJ	LGA-202ALC1-HJ	LGA-202BLC1-HJ	LGA-202DLC1-HJ	
Continuous Output Power	1500W	@35°C@ Rated input	voltage	2000W@35°C@ Rated input voltage			
Surge Power		3000W@5S		4000W@5S			
Surge Current When Power On	<10	00A	<50A	<10	00A	<50A	
Output Voltage		100VAC/110VAC (120VAC (-7%~+		100VAC/110VAC (±3%); 120VAC (-7%~+3%)			
Output Frequency			50/60H	z ± 0.2%			
Output Wave			Pure Si	ne Wave			
Output Distortion THD	TH	ID ≤ 4% (Resistive loa	ad)	THD ≤ 5% (Resistive load)	THD ≤ 4% (Resistive load)	THD ≤ 4% (Resistive load)	
Load Power factor		0.2	2~1 (Lad power ≤ Co	ontinuous output power)			
Rated Input Voltage	12VDC	24VDC	48VDC	12VDC	24VDC	48VDC	
Input Voltage Range	10.8~16.0VDC	21.6~32.0VDC	43.2~64.0VDC	10.8~16.0VDC	21.6~32.0VDC	43.2~64.0VDC	
Rated Output Efficiency①	>88.0%	>88.0%	>90.0%	>85.0%	>88.0%	>88.0%	
Max. Output Efficiency②	>93.0% (30% loads)	>92.5% (30% loads)	>92.0% (30% loads)	>92.0% (30% loads)	>92.0% (30% loads)	>93.0% (30% loads)	
Idle Current	<0.2A	<0.15A	<0.1A	<0.2A	<0.15A	<0.1A	
No-load Current	<1.0A	<0.9A	<0.5A	<1.2A	<0.9A	<0.5A	
USB Output	5VDC/	Max.1A	_	5VDC/	Max.1A	_	
RS485 com.prt			5VDC/	200mA			
Input Terminal		M6		M10	N	16	
Dimension (L*W*H)		387×231.5×123mm		420×231.5×123 421×231.5×123mm mm			
Mounting Size (L*W)		361×145mm			395×145mm		
Mounting Hole Size			Ф6	mm			
Net Weight	5.90kg	5.70kg	5.53kg	7.45kg	6.28kg	6.20kg	

① It is measured in the condition of continuous output power and rated input voltage.

LESSO Off-grid Inverter

Parameters	LGA-302ALC1-HJ	LGA-302BLC1-HJ	LGA-302DLC1-HJ	LGA-402DLC1-HJ
Continuous Output Power	30	000W@35°C@ Rated input volta	ge	4000W@35°C @ Rated input voltage
Surge Power	4800W@5S	6000W@5S	6000W@5S	8000W@5S
Surge Current When Power On	<100A	<100A	<65A	<65A
Output Voltage		100VAC/110VAC (±3%	%); 120VAC (-7%~+3%)	
Output Frequency		50/60H	z ± 0.2%	
Output Wave		Pure Si	ne Wave	
Output Distortion THD	THD ≤ 4% (Resistive load)	THD ≤ 5% (Resistive load)	THD ≤ 4% (Resistive load)	THD ≤ 4% (Resistive load)
Load Power factor		0.2~1 (Lad power ≤ Co	entinuous output power)	
Rated Input Voltage	12VDC 24VDC		48VDC	48VDC
Input Voltage Range	10.8~16.0VDC	21.6~32.0VDC	43.2~64.0VDC	43.2~64VDC
Rated Output Efficiency①	>85.0%	>87.0%	>89.5%	>88.0%
Max. Output Efficiency2	>93.0% (30% loads)	>91.5% (30% loads)	>93.5% (30% loads)	>93.0% (30% loads)
Idle Current	<0.2A	<0.15A	<0.1A	<0.1A
No-load Current	<1.6A	<1A	<0.4A	<0.6A
USB Output	5VDC/Max.1A	5VDC/Max.1A	_	_
RS485 com.prt		5VDC/	200mA	
Input Terminal	M10		M6	
Dimension (L*W*H)	550×274×148mm	521×274×148mm	516×231.5×123mm	521×274×148mm
Mounting Size (L*W)	525×145mm	495×145mm	490×145mm	495×145mm
Mounting Hole Size		Ф6	mm	
Net Weight	11.60kg	10.65kg		

E	Invironment Parameters	Certification		
Work Temperature	-20°C~+60°C (Referto the Derating Curve)	safety	EN/IEC62109-1, UL1741, UL458, CSA C22.2#107.1	
Ctorogo Tompovoturo	torage Temperature -35°C~+70°C	EMC	EN61000-6-1/EN61000-6-3	
Storage Temperature		(Eectromagnetic compatibility)	FCC 47 CFR Part15, Subpart B	
Relatve Humidity	≤95% (N.C)	ROHS	IEC62321-3- 1	
Enclosure	IP20			

 $<sup>\</sup>ensuremath{\textcircled{1}}$  It is measured in the condition of continuous output power and rated input voltage.



② It means the max. output efficiency when the inverter is connected with different loads under the rated input voltage.

Remarks: Specifications are subject to change without notice.

 $<sup>\</sup>textcircled{2} \textbf{ It means the max. output efficiency when the inverter is connected with different loads under the rated input voltage. } \\$ 



### Feature:

Pure sine wave inverter
Built-in MPPT solar charge controller
Selectable charging current based on applications
Configurable AC/Solar input priority via LCD setting
Compatible to mains voltage or generator power

Auto restart while AC is recovering

Overload and short circuit protection

Smart battery charger design for optimized battery performance

Cold start function

Parallel operation with up to 6 units (optional)



# **LESSO**

# **Residential Off-grid Inverter with MPPT**

Product	Model	LSOTH3KTL-P2	LSOTH3K5TL-P2	LSOTH5KTL-P2	LSOTH5K5TL-P2	LSOTH6K2TL-P2	LSOTH8KTL-P2	LSOTH10KTL-P2	LSOTH11KTL-P2		
	Input sources				L+N	I+PE	1				
	Rated input voltage				220/230	/240VAC					
Input	Voltage range	90-280VAC±3V (APL Mode) 170-280VAC±3V (UPS Mode)									
	Frequency	50Hz/60Hz (Auto Adaptive)									
	Rated power (battery inverter)	3000W	3500W	5000W	5500W	6200W	8000W	10000W	11000W		
	Rated power (PV inverter)	3000W	4500W	6500W	6500W	6500W	11000W	11000W	11000W		
	Output voltage				220/230/2	40VAC±5%					
	Output frequency	50/60Hz±0.1%									
Output	Waveform	Pure Sine Wave									
	Transfer time (adjustable)	Computers(UPS Mode)10ms , Appliance(APL Mode)20ms									
	Peak power	6000VA	7000VA	10000VA	11000VA	12400VA	16000VA	20000VA	22000VA		
	Over load ability		Bat	tery Mode:11s@10	5%~150% Load, 2s	@150%~200% Loa	d, 400ms@>200% Lo	oad			
	Output Voltage				220/230/2	40VAC±5%					
	Feed into the grid Voltage range				195-2	253VA					
Grid-	Feed into the grid frequency range				49-51±1Hz,	/59 <b>-</b> 61±1Hz					
connected opertion	Nominal output current	13A	15.7A	21.7A	23.9A	26.9A	34.7A	43.4A	47.8A		
	Power factor range				>0	).99					
	Max. conversion efficency (DC/AC)				98	3%					
	Battery voltage	24Vdc	24Vdc	48Vdc	48Vdc	48Vdc	48Vdc	48Vdc	48Vdc		
Battery	Constant charging voltage	28.2Vdc	28.2Vdc	56.4Vdc	56.4Vdc	56.4Vdc	56.4Vdc	56.4Vdc	56.4Vdc		
	Floate charging voltage	27Vdc	27Vdc	54Vdc	54Vdc	54Vdc	54Vdc	54Vdc	54Vdc		
	PV charging mode	MPPT	MPPT	MPPT	MPPT	MPPT	MPPT Dual MPPT	MPPT Dual MPPT	MPPT Dual MPPT		
	Max PV input power	5000W	5000W	6200W	7500W	7500W	2*5500W	2*5500W	2*5500W		
	MPPT tracking range	60-500Vdc	60-500Vdc	60-500Vdc	60-500Vdc	60-500Vdc	90-500Vdc	90-500Vdc	90-500Vdc		
	Best voltage	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc		
Charges	Max PV input voltage	500Vdc	500Vdc	500Vdc	500Vdc	500Vdc	500Vdc	500Vdc	500Vdc		
	PV max input current	18A	18A	18A	27A	27A	18A/18A	18A/18A	18A/18A		
	Max PV charging current	100A	120A	100A	100A	120A	150A	150A	150A		
	Max AC charging current	60A	100A	60A	100A	100A	150A	150A	150A		
	Max charging current	100A	120A	100A	100A	120A	150A	150A	150A		
Display	LCD interface			CAN	display runing mod	e/load/input/outpu	t, etc				
	RS232				Baud ra	ate 2400					
Interface	Communication port			Lithium Batte	ery BMS Communic	ation Card WifiCard	I, Dry Contact				
	Parallel connect interface	No parallel	function			Parallel machine (	network) function				
	Operating temperature				-10-	50°C					
	Humidity	20%-95% (non-condensing) -15-60°C									
Environment	Storage temperature										
	Altitude			Altiude not over 10	00m, derating over	1000m, max 4000m	n, refer to IEC62040				
	Noise				≤50	Odb					
Standards	and certifiaction			EN-II	EC 60335-1, EN-IEC	60335-2-29, IEC 62	109-1				

<sup>1:</sup> The paralel addition of inverters requires the addition of accessories and paralel boards. For more information, please contact the sales manager.

Remarks: Specifications are subject to change without notice. Special voltage and power requirements can be customized designed. The specific appearance is subject to the actual product.





# LSOTH1-6KS-M01

Off-grid Inverter with MPPT

### >> Models:

LSOTH1KS-M01

LSOTH1K5S-M01

LSOTH2KS-M01

LSOTH3KS-M01

LSOTH4KS-M01

LSOTH5KS-M01

LSOTH6KS-M01



### Feature

- Split phase output
- Toroidal low-loss transformer, high inverter efficiency, pure sine wave output
- Intelligent LCD integrated display
- New appearance design, built-in photovoltaic MPPT controller
- Mains charging current is adjustable, allowing users to configure battery capacity more flexibly
- Three working modes can be set (AC mode, battery mode, energy saving mode)
- The startup peak power is more than 3 times, with fully automatic and complete protection functions
- Added fault code query function to facilitate users to monitor operating status in real time
- Supports diesel generators and can be used in harsh power environments
- Suitable for both industrial and residential scenarios, wall-mounted design, easy to install



# **LSOTH Off-grid Inverter with MPPT**

Туре		LSOTH1KS-M01	LSOTH1K5S-M01	LSOTH2KS-M01	LSOTH3KS-M01	LSOTH4KS-M01	LSOTH5KS-M01	LSOTH6KS-M01	
Rated	Power	1000W	1500W	2000W	3000W	4000W	5000W	6000W	
Peak F	ower(20ms)	3000VA	4500VA	6000VA	9000VA	12000VA	15000VA	18000VA	
Start N	lotor	1HP	1.5HP	2HP	3HP	3HP	4HP	4HP	
Battery	Voltage		12/24/48VDC 24/48VDC 24/48VDC 48VDC						
Max A	C charging current	0~30A (Depending on model)							
Size(L	·W*Hmm)		500x30	00x140			530x335x150		
Packin	g Size(L*W*Hmm)		565x39	95x225			605x420x235		
N.W.(k	g)	12	13.5	18	20	22	24	26	
G.W.(k	g)	13.5	15	19.5	21.5	24	26	28	
Installa	tion Method		Wall-Mounted						
	DC Input Voltage Range				5VDC (Single battery v	· ,			
	AC Input Voltage				/120AC or 220VAC/2				
Input	AC Input Voltage Range	85	SVAC~138VAC (110VA				0VAC~295VAC(240VA	(C)	
	AC Input Frequency Range				5Hz(50Hz) / 55Hz~65I				
	AC charging method			Three-stage (constar	nt current, constant vol	Itage, floating charge)			
	Efficiency(Battery Mode)			440040	≥85%	2424			
	Output Voltage(Battery Mode)			110VAC	or 120VAC ; 220VAC (	or 240AC			
	Output Frequency(Battery Mode)				50/60Hz±1%				
	Output Wave(Battery Mode)				Pure Sine Wave				
Output	Efficiency(AC Mode) Output Voltage(AC Mode)			110\/AC	≥99%	or 2404C			
Output	Output Frequency(AC Mode)			TTUVAC	or 120VAC; 220VAC of Follow input	DI 240AC			
	Output waveform distortion				Tollow Input				
	(Battery Mode)	≤3% (Linear load)							
	No load loss(Battery Mode)	≤0.8% rated power							
	No load loss(AC Mode)				≤0.8% rated power				
	No load loss (Energy saving Mode)				≤10W				
Pottoni	VRLA Battery		(	Charge Voltage :14.2\	; Float Voltage:13.8V (	(Single battery voltage	:)		
Battery Type	Customize battery	Cha	rging and discharging (charging and discha			in be customized accories can be set through		nents	
Protect	on		under voltage alarm, voltage recovery voltag						
	A			Normal working	condition, buzzer has	no alarm sound			
Alarm	В		Buzzer sounds	4 times per second w	hen battery failure, vol	tage abnormality, over	rload protection		
	С		When the machin	e is turned on for the t	irst time, the buzzer w	ill prompt 5 when the	machine is normal		
	Charging current	2V/24V:40A; 48V:30A	12V/24V:60A; 48V:30A	12V/24V:60A; 48V:30A	60A	24V:60A; 48V:60Aor100A	60Aor100A	160Aor100A	
	PV Input Voltage Range		15	V-120V(12V System);	30V-120V(24V System	); 60V-120V(48V Syste	em)		
Solar controller	Max PV Input Voltage(Voc) (At the Iowest temperature)				150V				
	PV Array Maximum Power	12V System	: 560W (40A)/840W(6	0A); 24V System: 112	20W(40A)/1680W(60A	); 48V System: 1680W	/(30A)/3360W(60A)/5	600W(100A)	
	Standby loss				≤3W				
	Maximum conversion efficiency				>95%				
	g Mode			Battery First/AC	First/Saving Energy M	lode (Can be set)			
Transfe					≤4ms				
Display		LCD							
	al method				ling fan in intelligent co				
Comm	unication			HS485/APP (\	WIFI monitoring or GPI	HS monitoring)			
	Operating temperature				-10°C~40°C				
Environ-	Storage temperature				-15°C~60°C				
ment	Noise			00	≤55dB	ing)			
	Elevation	2000m (More than derating)							
	Humidity			09	%~95% ,No condensat	.1011			

Note: All specifications are subject to charge without prior notice







**Guangdong Lesso Energy Storage Technology Co., Ltd** 



LET-G10/20/30/40/50/60/80/100LF-XT LET-D10/20/30/40/50/60/80/100HF-XT MPPT Solar Charge Controller

Model	LET- G10/20/30LF-XT	LET- D10/20/30HF-XT	LET- G40/50/60LF-XT	LET- D40/50/60HF-XT	LET- G80/100LF-XT	LET- D80/100HF-XT
Rated Current	10/20/30A		40/50/60A		80/100A	
Rated System Voltage	12/24V	48V	12/24V	48V	12/24V	48V
Max PV Input Voltage	120V	180V	120V	180V	120V	180V
MPPT Tracking Voltage Range	12V system: 15V-80V; 24V system: 30V-100V; 48V system: 60V-140V;					
Recommended operating Voltage Range		12V system: 15V	/-30V; 24V systen	n: 30V-60V; 48V s	system: 60V-90V	,
PV array Max power	12V system: 15V-30V; 24V system: 30V-60V; 48V system: 60V-90V;  12V system: 140W(10A)/280W(20A)/420W(30A)/560W(40A)/700W(50A)/  840W(60A)/1120W(80A)/1400W(100A);  24V system: 280W(10A)/560W(20A)/840W(30A)/1120W(40A)/1400W(50A)/  1680W(60A)/2240W(80A)/2800W(100A);  48V system: 560W(10A)/1120W(20A)/1680W(30A)/2240W(40A)/2800W(50A)/  3360W(60A)/4480W(80A)/5600W(100A);					

# **LESSO**

# **MPPT Solar Charge Controller**

Model	LET- G10/20/30LF-XT	LET- D10/20/30HF-XT	LET- G40/50/60LF-XT	LET- D40/50/60HF-XT	LET- G80/100LF-XT	LET- D80/100HF-XT
Battery Type	Lead acid battery	//Lithium battery(	Users can custom	ize charging para	meters for other t	types of batteries)
Floating Voltage		12V system	: 13.8V; 24V syste	em: 27 <b>.</b> 6V; 48V sys	stem: 55 <b>.</b> 2V	
Charge Voltage		12V system	: 14.2V; 24V syste	em: 28.4V; 48V sys	stem: 56.8V	
Charging Protection Voltage		12V system	: 15.5V; 24V syste	em: 31.0V; 48V sys	stem: 62.0V	
Increase Protection Voltage		12V system	: 14.5V; 24V syste	em: 29.0V; 48V sys	stem: 58.0V	
Low Voltage Recovery Point		12V system	: 12.5V; 24V syste	em: 25.0V; 48V sys	stem: 50.0V	
Discharge Limiting Voltage		12V system	: 10.5V; 24V syste	em: 21.0V; 48V sys	stem: 42.0V	
Temperature Compensation Coefficient		-3r	nV/°C/2V(25°C is	base line) (Option	nal)	
Charging Mode		N	IPPT maximum p	ower point trackin	g	
Charging Method	Т	hree stages: con	stant current(MPP	T); constant volta	ge; floating charg	je
Protection	Over-	voltage/under-vo	tage/over-temper	ature/Anti-reverse	connection prote	ection
Conversion Efficiency			>9	8%		
MPPT Tracking Efficiency			>9	9%		
Machine Size(L*W*H)	214×155	×72.8mm	238×180	)×82mm	315×210×	×106.5mm
Pookogo Sizo(I *\W*LI\	243×184×115(1pc)		267×209×124(1pc)		344×239×149(1pc)	
Package Size(L*W*H)	497×379×	247(8pcs)	639×278×265(6pcs)		489×355×	(315(4pcs)
N.W(kg)	1.6(	1pc)	2.4(	1pc)	4.2(	(1pc)
G.W(kg)	1.8(	1pc)	2.7(	1pc)	4.6(	1pc)
Display			LC	D		
Thermal Method			Cooling fan in in	telligent control		
Type of Mechanical Protection			IP:	20		
Operating Temperature			-15°C~	+50°C		
Storage Temperature			-20°C~	+60°C		
Elevation	2000m(Dreating above 2000m)					
Humidity	5%~95%(No condensation)					
Communication(Optional)		RS485/	APP(WIFI monitor	ing or GPRS mor	nitoring)	







# **LET-XB1-HJ Series**

# **MPPT Solar Charge Controller**

The LET-XB1-HJ Series is a new generation of MPPT solar charge and discharge controllers with an integrated Bluetooth module\*. Users can easily read or modify settings parameters through the EPEVER APP. It boasts rapid tracking speed and response for high-power points, ensuring maximal utilization of solar energy. The device features an adaptive three-stage charging mode and a stable function for lithium battery activation, which safeguards battery charging and enhances the overall system performance and lifespan. It also offers a constant voltage output function, which allows the PV to directly supply power to the load in sunlight without a battery, significantly broadening the system's applications. With an IP33 protection and a low self-consumption, along with optimized EMC and comprehensive protection functions, it is suitable for various fields including RVs, residential systems, and field monitoring, meeting a variety of needs.

\*Only LET-XB1-HJ Series has built-in Bluetooth module

#### **Features**

- Constant voltage output
- Rated Charging Power & Current Limitation
- Certain models support Bluetooth for parameter reading and modification via app
- Operates at full load within the working temperature range
- Innovative MPPT technology & ultra-fast tracking speed
- Tracking efficiency is no less than 99.5%
- Compatible with various types of batteries: lithium, gel, sealed, etc
- Wide MPPT voltage range, maximizes the utilization of PV modules
- Automatic temperature compensation for lead-acid batteries and stable self-activation for lithium batteries
- RS485 communication interface with optional 4G or Wi-Fi modules for remote monitoring
- Low self-consumption, lower than 10mA
- IP33 enclosure, Comprehensive electronic protections













Solar Car

Solar Home

S

Solar Backpack

Solar Boat

Solar Street Light

Solar Power Generator





### **MPPT Solar Charge Controller**

Model	LET-G10KN2R1-HJ/ LET-G10KN2B1-HJ	LET-G20KN2R1-HJ/ LET-G20KN2B1-HJ	LET-G10TN2R1-HJ/ LET-G10TN2B1-HJ	LET-G20TN2R1-HJ/ LET-G20TN2B1-HJ	LET-G30TN2R1-HJ/ LET-G30TN2B1-HJ		
Electrical Parameters							
Battery Rated Voltage			12/24VDC★Auto				
Rated Charging Current	10A	20A	10A	20A	30A		
Rated Discharging Current	10A	20A	10A	20A	30A		
Controller Work Voltage Range			8~31V				
PV Maximum Open-Circuit Voltage	, , ,	g environment temperature) nment temperature)		100V(At minimum operating environment temperature) 92V(At 25°C environment temperature)			
MPPT Voltage Range	(Battery volta	age+2V)~36V		(Battery voltage+2V)~72V			
Rated Charging Power	130W/12V 260W/24V	260W/12V 520W/24V	130W/12V 260W/24V	260W/12V 520W/24V	390W/12V 780W/24V		
Maximum Conversion Efficiency	97.90%	98.30%	98.20%	98.30%	98.60%		
Maximum Load Efficiency	97.00%	96.70%	96.20%	96.40%	96.60%		
Static Losses (Enable the com.port)	≤10mA(12V) ≤7mA(24V)	≤10mA(12V) ≤7mA(24V)	≤15mA(12V) ≤9mA(24V)	≤15mA(12V) ≤9mA(24V)	≤15mA(12V) ≤9mA(24V)		
Static Losses (Disable the com.port)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤6mA(24V)	≤8mA(12V) ≤6mA(24V)	≤8mA(12V) ≤5mA(24V)		
Discharge-Circuit Voltage Drop			≤0.23V				
Temperature Compensation			-3mV/°C/2V(Default)				
Grounding Type			Common negatve				
RS485 Port			5VDC/200mA(RJ45)				
LCD Backlight Time		Default: 60s, Ran	ge: 0~999s(0s: the back igh	t is ON all the time)			
Mechanical Parameters							
Dimension (L*W*H)	175×143×48mm	217×158×56.5mm	175×143×48mm	217×158×56.5mm	230×165×63mm		
Mounting Size (L*W)	120×134mm	160×149mm	120×134mm	160×149mm	173×156mm		
Mounting Hole size			Ф5mm		'		
Terminal	12AWG(4mm²)	6AWG(16mm²)	12AWG(4mm²)	6AWG(6mm²)	6AWG(16mm²)		
Recommended Wire Size	12AWG(4mm²)	10AWG(6mm²)	12AWG(4mm²)	10AWG(6mm²)	8AWG(10mm²)		
Net Weight	0.58kg	0.97kg	0.59kg	0.97kg	1.30kg		
Work Temperature Range			-25°C~+50°C				
Storage Temperature Range			-20°C~+70°C				
Relative Humidity			≤95%, N.C.				
Enclosure	IP33 (3 -protection again	nstsolid objects: protected ag	ainst solids objects over 2.5	mm. 3-protected against spra	ays to 60°from the vertical.		
Pollution Degree			PD2				



### **MPPT Solar Charge Controller**

Model	LET-G40TN2R1-HJ/ LET-G40TN2B1-HJ	LET-G30LN2R1-HJ/ LET-G30LN2B1-HJ	LET-G40LN2R1-HJ/ LET-G40LN2B1-HJ	LET-H30LN2R1-HJ/ LET-H30LN2B1-HJ	LET-H40LN2R1-HJ/ LET-H40LN2B1-HJ	
Electrical Parameters						
Battery Rated Voltage		12/24VDC★Auto		12/24/36/48VDC★Auto		
Rated Charging Current	40A	30A	40A	30A	40A	
Rated Discharging Current	40A	30A	40A	30A	40A	
Controller Work Voltage Range		8~31V		8~	62V	
PV Maximum Open-Circuit Voltage	100V(At minimum operating environment temperature) 92V(At 25°C environment temperature)			g environment temperature)		
MPPT Voltage Range	(Battery voltage+2V)~72V		(Battery volta	ge+2V)~108V		
Rated Charging Power	520W/12V 1040W/24V	390W/12V 780W/24V	520W/12V 1040W/24V	390W/12V 780W/24V 1170W/36V 1560W/48V	520W/12V 1040W/24V 1560W/36V 2080W/48V	
Maximum Conversion Efficiency	98.60%	97.60%	97.90%	98.10%	98.50%	
Maximum Load Efficiency	96.50%	95.10%	95.40%	96.90%	97.20%	
Static Losses (Enable the com.port)	≤15mA(12V) ≤9mA(24V)	≤15mA(12V) ≤9mA(24V)	≤15mA(12V) ≤9mA(24V)	≤14mA(12V) ≤9mA(24V) ≤8mA(36V) ≤7mA(48V)	≤14mA(12V) ≤9mA(24V) ≤8mA(36V) ≤7mA(48V)	
Static Losses (Disable the com.port)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤5mA(24V) ≤5mA(36V) ≤5mA(48V)	≤8mA(12V) ≤5mA(24V) ≤5mA(36V) ≤5mA(48V)	
Discharge-Circuit Voltage Drop			≤0.23V			
Temperature Compensation			-3mV/°C/2V(Default)			
Grounding Type			Common negatve			
RS485 Port			5VDC/200mA(RJ45)			
LCD Backlight Time		Default: 60s, Rar	nge: 0~999s(0s: the back igh	t is ON all the time)		
Mechanical Parameters						
Dimension (L*W*H)	255×185×67.8mm	255×185×67.8mm	255×187×75.7mm	255×187×75.7mm	255×189×83.2mm	
Mounting Size (L*W)	200×176mm	200×176mm	200×178mm	200×178mm	200×180mm	
Mounting Hole size			Ф5mm			
Terminal	6AWG(16mm²)	6AWG(16mm²)	6AWG(16mm²)	6AWG(16mm²)	6AWG(16mm²)	
Recommended Wire Size	6AWG(16mm²)	8AWG(10mm²)	6AWG(16mm²)	8AWG(10mm²)	6AWG(16mm²)	
Net Weight	1.72kg	1.66kg	2.08kg	2.16kg	2.60kg	
Work Temperature Range	-25°C~+50°C		-25°C~	r+45°C		
Storage Temperature Range			-20°C~+70°C			
Relative Humidity			≤95%, N.C.			
Enclosure	IP33 (3 -protection agains	stsolid objects: protected ag	gainst solids objects over 2.5r	nm. 3-protected against spra	ys to 60°from the vertical.)	
Pollution Degree			PD2			

Remarks: Specifications are subject to change without notice.

**Guangdong Lesso Energy Storage Technology Co., Ltd** Daba Industrial Area, Longjiang Town, Foshan Clty, Guangdong Province, China











# **LET-XB2-HJ Series**

# **MPPT Solar Charge Controller**

The LET-XB2-HJ series is a new generation of high-current MPPT charge and discharge controller. It features load output capability and delivers superior MPPT tracking and conversion efficiency. The series is compatible with various lithium battery types and supports three-stage charging management to extend battery lifespan. Its exceptional low-power design significantly reduces static consumption, prolonging system standby time.

Comprehensive electronic protection and flexible communication options (WiFi, Bluetooth, 4G, etc.) further enhance system reliability and monitoring capabilities. It is widely used in RVs, boats, industrial monitoring, and small to medium-sized solar power systems.

### **Features**

- Supports 12V/24V/36V/48V systems; Charge/Discharge current: 50A-100A
- All metal die-casting shell, IP43(1)
- Supports two PV inputs(2)
- Max. MPPT tracking efficiency: 99.9%; Max. Conversion efficiency: 98.5%
- Compatible with AGM, Gel, Flooded, LiFePO4 batteries, etc.
- Constant voltage output functio: Enables direct load supply with sufficient PV energy
- Communication interface with electrical isolation
- · CAN: Parallel operation of up to 6 devices(with or without batteries)
- · BMS: Ensures reliable lithium battery charge/discharge management(3)
- RS485: Optional Bluetooth, WiFi, or 4G modules(4)
- Real-time data recording, event logging, and power statistics function
- EMC compliant (CLASS B)
- (1) IP32 without terminal cover
- (2) LET-H100LN242-HJ, LET-H100LN2B2-HJ; LET-H100HN2R2-HJ;LET-H80HN242-HJ support two PV inputs
- (3) Requires BMS-LINK module for others company batteries
- (4) LET-XXXXXXBXX-HJ models feature integrated Bluetooth

Model	LET-H50HN2R1-HJ	LET-H60LN2R1-HJ LET-H60LN2B1-HJ	LET-H60HN2R1-HJ	LET-H75LN2R1-HJ					
Electrical Parameters									
Battery Rated Voltage		12/24/48\	/DC~Auto						
Controller Operating Voltage Range		8-6	52V						
Battery Type		AGM (Default) / Gel / Flooded / User							
Lithium Battery Type		LiFePO4 / Li (Ni	CoMn)O2 / User						
Rated Charging / Discharging Current	50A	60	)A	75A					
Rated Charging Power	650W/12V; 1,300W/24V; 2,600W/48V	780W/12V; 1 3,120V		975W/12V; 1,950W/24V; 3,900W/48V					
Maximum Charging Power	650W/12V; 1,300W/24V; 2,600W/48V	780W/12V; 1 3,120V		975W/12V; 1,950W/24V; 3,900W/48V					
Rated Load Current	50A	60	)A	75A					
Maximum Load Current	50A	60	)A	75A					
PV Maximum Open-circuit Voltage	200V (@ lowest temperature); 180V (@ 25°C)	150V (@ lowest temperature); 138V (@ 25°C)	200V (@ lowest temperature); 180V (@ 25°C)	150V (@ lowest temperature); 138V (@ 25°C)					
MPPT Operating Voltage Range	(Battery voltage plus 2V, and>28V) to 144V (@ 25°C)	(Battery voltage plus 2V, and>28V) to 108V (@ 25°C)	(Battery voltage plus 2V, and>28V) to 144V (@ 25°C)	(Battery voltage plus 2V, and>28V) to 108V (@ 25°C)					
Tracking Efficiency		≥ 99	0.5%						
Maximum Conversion Efficiency	98.30%	98.60%	98.10%	98.60%					
Full Load Efficiency	97.10%	98.00%	98.00%	98.00%					
Temperature Compensation Coefficient		-3mV/°C/2	V (Default)						
Self-consumption (Enabled Communication)		98mA/12V; 60mA	/24V; 46mA/48V						
Self-consumption (Disabled Communication)		48mA/12V; 25mA/24V; 14mA/48V							
Grounding Type		Common nega	ative grounding						
Dry Contact (Oil Generator / Utility)		Rated value: 5A/30VDC; M	aximum value: 0.5A/60VDC						
RS485 Communication Port		5VDC/200	mA (RJ45)						
Mechanical Parameters									
Dimension (L*W*H) IP43 (Controller & White Terminal Cover)	307×253×143mm	320×263	×143mm	320×263×158mm					
Dimension (L*W*H) IP32 (Controller Only)	307×202×134mm	320×212	×134mm	320×212×149mm					
Mounting Dimension (L*W)	295×130mm		308×140mm						
Mounting Hole Size		Φ7r	mm						
Wiring Terminal	6AWG/16mm <sup>2</sup>		2AWG/35mm <sup>2</sup>						
Recommended Cable		6AWG/16mm <sup>2</sup>		4AWG/25mm²					
Net Weight IP43 (Controller & White Terminal Cover)	5.07kg	5.88kg	5.93kg	6.56kg					
Net Weight IP32 (Controller Only)	4.86kg	5.66kg	5.71kg	6.34kg					
Environmental Parameters									
Operating Temperature Range		-25°C to +60°C (Derating when t	emperature is higher than 40°C)						
LCD Temperature Range		-20°C to	) +70°C						
Storage Temperature Range	-30°C to +70°C								
Relative Humidity	5%-95% (N.C)								
Altitude	< 5,000M (Derating when altitude is higher than 2,000m)								
Enclosure	Ip43 (Controller & White Terminal Cover); IP32 (Controller Only)								
Pollution Degree		PI	02						
Certification									
Safety		EN/IEC	62109-1						
EMC		EN61000-6-1	/ EN61000-6-3						
FCC		47 CFR Part	15, Subpart B						
ROHS		IEC623	321-3-1						

Remarks: Specifications are subject to change without notice.

Battery Rated Voltage Controller Operating Voltage Range Battery Type Lithium Battery Type Rated Charging / Discharging Current Batted Charging Power		10/04/4						
Controller Operating Voltage Range Battery Type Lithium Battery Type Rated Charging / Discharging Current		10/04/4						
Battery Type Lithium Battery Type Rated Charging / Discharging Current		12/24/4	8VDC~Auto					
Lithium Battery Type Rated Charging / Discharging Current		8-	-62V					
Rated Charging / Discharging Current		AGM (Default) / Gel / Flooded / User						
		LiFePO4 / Li (N	NiCoMn)O2 / User					
Rated Charging Power	75A	75A 80A 100A						
	975W/12V; 1,950W/24V; 3,900W/48V	1,040W/12V; 2,080W/24V; 4,160W/48V		2,600W/24V; N/48V				
Maximum Charging Power	975W/12V; 1,950W/24V; 3,900W/48V	1,040W/12V; 2,080W/24V; 4,160W/48V		2,600W/24V; N/48V				
Rated Load Current	75A	80A	10	0A				
Maximum Load Current	75A	80A	10	0A				
PV Maximum Open-circuit Voltage	200V (@ Iowest temperature); 180V (@ 25°C)	200V (@ lowest temperature); 180V (@ 25°C)	150V (@ lowest temperature); 138V (@ 25°C)	200V (@ lowest temperature); 180V (@ 25°C)				
MPPT Operating Voltage Range		plus 2V, and>28V) (@ 25°C)	(Battery voltage plus 2V, and>28V) to 108V (@ 25°C)	(Battery voltage plus 2V, and>28V) to 144V (@ 25°C)				
Tracking Efficiency		≥ (	99.5%					
Maximum Conversion Efficiency	98.10%	98.50%	98.60%	98.50%				
Full Load Efficiency	97.50%	97.50%	98.00%	97.60%				
Temperature Compensation Coefficient		-3mV/°C/2V (Default)						
Self-consumption (Enabled Communication)		98mA/12V; 60m	A/24V; 46mA/48V					
Gelf-consumption (Disabled Communication)		48mA/12V; 25mA/24V; 14mA/48V						
Grounding Type		Common neg	gative grounding					
Ory Contact (Oil Generator / Utility)		Rated value: 5A/30VDC; I	Maximum value: 0.5A/60VDC					
RS485 Communication Port		5VDC/20	0mA (RJ45)					
Mechanical Parameters								
Dimension (L*W*H)	320×263×158mm		352×263×158mm					
P43 (Controller & White Terminal Cover) Dimension (L*W*H) IP32 (Controller Only)	320×212×149mm		352×212×149mm					
	308×140mm		340×140mm					
Mounting Dimension (L*W)	306*14011111	Φ.	7mm					
Mounting Hole Size								
Wiring Terminal	41110		G/35mm <sup>2</sup>					
Recommended Cable	4AWG <sub>i</sub>	/25mm²	4AWG/	35mm²				
Net Weight IP43 Controller & White Terminal Cover)	6.62kg	7.79kg	7.87kg	7.87kg				
Net Weight IP32 (Controller Only)	6.40kg	7.55kg	7.63kg	7.63kg				
Environmental Parameters								
Operating Temperature Range		-25°C to +60°C (Derating when	temperature is higher than 40°C)					
_CD Temperature Range		-20°C	to +70°C					
Storage Temperature Range		-30°C	to +70°C					
Relative Humidity		5%-9	5% (N.C)					
Altitude			altitude is higher than 2,000m)					
Enclosure			inal Cover); IP32 (Controller Only)					
Pollution Degree			PD2					
Certification								
Safety		FN/IFI	C62109-1					
EMC		<u> </u>	I / EN61000-6-3					
FCC			t 15, Subpart B					
			2321-3-1					









Туре	LSRTH5KTLS-ML01	LSRTH6KTLS-ML01	LSRTH7K6TLS-ML01	LSRTH8KTLS-ML01	LSRTH10KTLS-ML01		
PV input							
Max.DC input power (kW)	7.5	9	12	12	15		
No. of MPPT trackers		4					
MPPT voltage range (V)			120~500				
MAX.DC input voltage (V)			500				
MAX. input current (A)		14					
MAX. short circuit current (A)		22					

#### **Battery input**

<b>7</b>								
Nominal voltage (V)	48							
MAX.charging/discharging current (A)	120/120	120/120 135/135 190/190 190/190 190/21						
Battery voltage range (V)		40~60						
Battery type		Lithium /Lead-acid						
Charging strategy for Li-Ion battery	Self-adaption to BMS							

# **LESSO**

# **LSRTH Series Residential Hybrid Inverter**

Туре	LSRTH5KTLS-ML01	LSRTH6KTLS-ML01	LSRTH7K6TLS-ML01	LSRTH8KTLS-ML01	LSRTH10KTLS-ML0				
AC output(on-grid)									
Nominal output power output to grid (kVA)	5	6	7.6	8	10				
MAX. apparent power output to grid (kVA)	5.5	6.6	8.4	8.8	11				
Output voltage range (V)		(110~120)/(220~240)split phase, 240V single phase							
Output frequency (Hz)		,	60(55 to 65)						
Nominal AC current output to grid (A)	20.8	25	31.7	33.3	41.7				
Max. AC current output to grid (A)	22.9	27.5	34.8	36.7	45.8				
Max. grid passthrough current (A)			100		·				
Output THDi			<3%						
AC output(back-up)									
Nominal. apparent power (kVA)	5	6	7.6	8	10				
Max. apparent power (kVA)	5.5	6.6	8.4	8.8	11				
Nominal output voltage L-N/L1-L2 (V)	0.0	0.0	120/240	0.0	11				
Nominal output frequency (Hz)			60						
Automatic switchover time (ms)			<20						
Output power factor			0.8leading~0.8lagging						
Output THDu			<2%						
output 11154			-270						
Protection									
Grounding detection			Yes						
Arc fault protection			Yes						
Island protection			Yes						
Battery reverse polarity			Yes						
Insulation resistor detection			Yes						
Residual current monitoring unit			Yes						
Output over current protection			Yes						
Back-up output short protection			Yes						
Output over voltage protection			Yes						
Output under voltage protection			Yes						
General data									
Mppt efficency			99.9%						
Europe efficiency (PV)			96.5%						
PV to grid efficiency (PV)			97.2%						
Battery to load efficiency			95.2%						
PV to battery charing efficiency			96.1%						
Grid to battery charing efficiency			95.0%						
Output conduit (mm)			25.4						
PV input conduit (mm)			25.4						
BAT input conduit (mm)			35.4						
Operating temperature range (C)			-25~+60						
Relative humidity			0-95%						
Operating altitude		0~4,0	00m(Derating above 2,000m a	altitude)					
Ingress protection		IP65/NEMA 3R							
Built-in breaker			Optional						
Weight (kg)			48kg(50kg with breaker)						
Dimensions W*H*D (mm)			450 x 820 x 240						
Cooling			FAN cooling						
Noise emission (dB)			38						
Display			LCD,Touch panel(optinal)						
Communication with BMS/Meter/EMS			RS485, CAN						
Supported communication interface			RS485, WLAN, 4G (optional)						
Self-consumption			<25W						
Safety		UL174	1SA all options, UL1699B, CS	SA 22.2					
EMC			FCC part 15 class B						
Support diesel generator			YES						

#### Other data

		$\overline{}$
Peak power (off grid)	105%.60s / 110%.30s / 120%.10s / 150%.20ms	











# **LEC-ABF Series**

# **Residential Hybrid Inverter**

7-10kW | Single Phase

LEC-ABF Series (7-10kW) delivers superior power capacity and intelligent energy management for high-demand residences. This advanced hybrid inverter solution combines robust 10kW output with cutting-edge efficiency to maximize solar self-consumption, significantly reduce electricity costs, and provide instantaneous backup power during grid failures.



10kW Continuous (20kW Peak) Output



**Dual MPPT with 99.9% Efficiency** 



200A Hyper-Fast Battery Charging



**Smart 4-Stage Energy Scheduling** 



10ms Seamless Backup Transition



**Silent Indoor Operation** 

# **LESSO**

# **Residential Hybrid Inverter**

Model	LEC-702A1B1F	LEC-852A1B1F	LEC-103A1B1F
PV Input			
Max input voltage (V)		500	
Isc PV (A)	25/25	27.5/27.5	28.75/28.75
Max input current (A)	20/20	22/22	23/23
Number of MPPT channels		2	
MPPT range (Vdc)		125-435	
Vdc range @ full power (Vdc)		240-425	
Max input PV power (VA)	14000	15200	16000
Battery (charge/discharge)			
Battery type		Li-ion / Lead-acid / User-defined	
Rated norma voltage (Range) (Vdc)		48V(40-60V)	
Rated battery voltage (V)		48	
Max charge/discharge current (A)	170	180	200
Max charge/discharge power (W)	7000	8500	10000
AC Grid (input and output)			
Rated AC voltage (Vac)		230(Single phase)	
AC input voltage (Range) (Vac)		90-275	
Rated frequency (Hz)		50/60	
Bypass over current (A)		60	
AC Load Output (stand alone)			
Rated voltage (VAC)		230(Single phase)	
Rated frequency (Hz)		50/60	
Rated current (A)	32	38	45
Rated output power (W)	7000	8500	10000
P-P output power (W)	11000	12000	15000
Load capacity of motors	4HP	5HP	6HP
Overload capablility (off grid)	5 consecutive over (102%≺load	erload protection the inverter will resume of doads will switch off the output until the in I< load < 125%): error and output shutdow 5%: error reported and output switched o	verter is restarted. n after 10s.
Output power factor (off grid)		0.8 leading to 0.8 lagging	
Others			
Ingress protection (IP)		IP20, indoor only	
Temperature (°C)	-10~5	5°C, >45°C derated (14~131°F, >113°F de	erated)
Inverter isolation	Non-isola	ated PV-AC, High frequency isolated (Batt	ery side)
Dimensions D*W*H (mm)		620*445*130	
Weight (kg)		27	
Altitude (m)		2000	
Cooling method		Built-in fan	
Commication			
Embedded interfaces		RS485/CAN/USB/Dry contact	
External modules (optional)		WiFi/GPRS	

Remarks: Specifications are subject to change without notice.

**Guangdong Lesso Energy Storage Technology Co., Ltd** Daba Industrial Area, Longjiang Town, Foshan Clty, Guangdong Province, China









# **LEC-ABN Series**

# **Residential Hybrid Inverter**

3-8kW | Single phase



The LEC-ABN Series (3-8kW) delivers a powerful and adaptive solution for residential solar storage, combining high efficiency, robust protection, and intelligent energy management. Designed for homes in high electricity-cost regions, it maximizes solar self-consumption, slashes energy bills, and ensures uninterrupted backup power during outages.



**190A Ultra-Fast Charge/Discharge**Manage heavy loads instantly



Industry-Leading IP66 Protection
Dustproof, waterproof, install anywhrer



**Scale to 6 Units in Parallel** 

Expand power seamlessly for grid/off-grid



4-Stage Smart Charging

Cut costs via customizable energy schedules



**Universal Battery Compatibility** 

Support lead-acid/lithium-iron battery



Remote & Touchscreen Control

Monitor and adjust via 4G/WiFi or touchscreen



# **Residential Hybrid Inverter**

Product Model	LEC-302A 3BN	LEC-362A 3BN	LEC-402A 3BN	LEC-462A 3BN	LEC-502A 3BN	LEC-602A 3BN	LEC-702A 3BD	LEC-762A 3BD	LEC-802A 3BD
PV Input									
Max input voltage (V)					500				
Isc PV (A)	22.5	22.5/22.5	22.5/22.5	22.5/22.5	22.5/22.5	22.5/22.5	37.5/22.5	37.5/22.5	37.5/22.5
Max input current (A)	18	18/18	18/18	18/18	18/18	18/18	30/18	30/18	30/18
Number of MPPT channels		1				:	2		
MPPT range (Vdc)					150~450				
Vdc range @ full power (Vdc)					240~425				
Max input PV power (VA)	6000	7200	8000	9200	10000	12000	14000	15200	16000
Battery (charge/discharge)									
Battery type				L	i-ion/Lead-ac	id			
Rated battery voltage					48V(44-57V)				
Max charge/discharge current (A)	75	90	100	110	120	120	175	190	190
Max charge/discharge power (W)	3300	3960	4400	5000	5500	6000	7000	7600	8000
AC Grid (input and output)									
Rated AC voltage (VAC)		230(single phase)							
Rated frequency (Hz)				50(49-51de	efault ) (47-53	adjustable)			
Max. output current (A)	15	18	20	22	25	27	35	38	40
Max. output power (W)	3300	3960	4400	5000	5500	6000	7000	7600	8000
Max. apparent power (VA)	3300	3960	4400	5000	5500	6000	7700	8360	8800
Power factor (adjustable)				1~(0.8 I	eading to 0.8	lagging)			
AC Load Output (stand alone)									
Rated voltage (VAC)			230(sing	le phase)			220/	'230(single pl	nase)
Rated frequency (Hz)			5	0				50/60	
Rated current (A)	14	16	18	21	23	27	35	38	40
Max. output power (W)	3000	3600	4000	4600	5000	6000	7000	7600	8000
Overload capability (off grid)				>2	200% for 15 s	ec			
Output power factor (off grid)		1~(0.8 leading to 0.8 lagging)							
Output current harmonic distortion			THD	<3%(Nonlinea	ar load); THD	<1.5%(Linear	load)		
Others									
Ingress protection (IP)					IP66				
Protective class					Class I				
Temperature (°C)					-25°C~+60°C	;			
Inverter isolation			Non-isola	ted PV-AC; I	High frequenc	y isolated(Ba	ttery Side)		
Overvoltage category				OVC III (	AC Main), OV	C II (PV)			
Dimensions D*W*H (mm)					198*427*554	1			
Weight (kg)					20				
Altitude (m)					2000				

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed

**Guangdong Lesso Energy Storage Technology Co., Ltd** 







# **Residential Hybrid Inverter**

5-12kW | Three Phase



The LEC-BBD Series(5-12kW) stands out as a top-tier choice in the residential and light commercial hybrid inverter market, combining industrial-grade durability with intelligent energy management. Designed for homes, villas, and small enterprises in high electricity-cost regions, it maximizes solar self-consumption, slashes energy bills, and delivers zero-carbon resilience.



250A Ultra-Fast Charge/Discharge Manage heavy loads instantly



**Industry-Leading IP66 Protection** Dustproof, waterproof, install anywhrer



**Scale to 6 Units in Parallel** 

Expand power seamlessly for grid/off-grid



6-Stage Smart Charging

Cut costs via customizable energy schedules



**Universal Battery Compatibility** 

Support lead-acid/lithium-iron battery



**Remote & Touchscreen Control** 

Monitor and adjust via 4G/WiFi or touchscreen

### **LESSO**


## **Residential Hybrid Inverter**

Product Model	LEC-502B3BD	LEC-602B3BD	LEC-702B3BD	LEC-802B3BD	LEC-103B3BD	LEC-123B3BD	
PV Input							
Max PV (Vdc)			10	000			
Isc PV (A)	22.5	22.5	22.5	22.5/22.5	45/22.5	45/22.5	
Max. PV input current/strings (A)	18	18	18	18/18	36/18	36/18	
Number MPPT trackers		1			2		
MPPT range (Vdc)			200	~800			
Vdc range @ full power (Vdc)			350	~800			
PV Max (kW)	10	12	14	16	20	24	
Battery (charge/discharge)							
Battery type			Li-ion/L	ead-acid			
Battery norma voltage (Range) (Vdc)			48V(4	0-60V)			
Max charge/discharge current (A)	120	125	150	190	210	250	
Max charge/discharge power (W)	5000	6000	7000	8000	10000	12000	
AC Grid (input and output)							
Normal AC voltage (VAC)		380/400(3W+N+PE)					
Frequency (Hz)			50,	/60			
Max. cont output current (A)	8.3	10	11.6	13.3	16.7	20	
Max. cont output power (W)	5000	6000	7000	8000	10000	12000	
Max. cont. apparent power (VA)	5500	6600	7700	8800	11000	13200	
Power factor (adjustable)			0.8 leading t	o 0.8 lagging			
AC Load Output (stand alone)							
Normal voltage (VAC)			380/400(3	3W+N+PE)			
Frequency (Hz)			50	/60			
Nominal current (A)	8.3	10	11.6	13.3	16.7	20	
Max. cont. power (W)	5000	6000	7000	8000	10000	12000	
Overload capability (off grid)			>200% f	or 15 sec			
Output power factor (off grid)			0.8 leading t	o 0.8 lagging			
Output current harmonic distortion		THD	<3%(Nonlinear load	); THD<1.5%(Linear	· load)		
Others							
Ingress protection (IP)			IP	66			
Protective class		Class I					
Temperature (°C)		-25°C~+60°C					
Inverter isolation		Non-isolate	ed PV-AC; High fr	equency isolated(B	attery Side)		
Overvoltage category			OVC III (AC Ma	ain), OVC II (PV)			
Dimensions D*W*H (mm)			475*6	83*256			
Weight (kg)			3	88			
Altitude (m)			20	000			

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed

f in 🖸 🌀 LESSO Solar





**Guangdong Lesso Energy Storage Technology Co., Ltd** 





# **LSMO 25.6V120AH-ZY Battery Module**

LSMO Battery Module be mainly used in electric vehicles, electric mobility; Solar/wind energy storage system; UPS, backup power; Telecommunication; Medical equipment; Lighting.

#### **Features**



#### **Longer Cycle Life**

life than lead acid battery, helping to minimize replacement cost and reduce total cost of owner.



#### **Higher Power**

Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.



### **Increased Flexibility**

Modular design enables deployment of up to two batteries in series and up to four batteries in parallel.



#### **Lighter Weight**

About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.



#### **Superior Safety**

Automatic protection with internal battery management system.



### **Wider Temperature Range**

-20°C~60°C

**LESSO Battery Module** 

Items	LSMO 25.6V120AH-ZY
Nominal voltage	25.6V
Voltage range	25.6V~26.4V
Nominal capacity	120Ah
Minimum capacity	120Ah
Initial impedance	≤180mΩ
Charge limit voltage	28.8V
Discharge cut-off voltage	18.4V
Standard charge current	50A
Maximum charge current	100A
Standard discharge current	50A
Max continuous discharge current	100A
Charging time	Standard charging: 2~3 hours Rapid charge: 1~2 hours
Cycle Life	≥4000 Cycle life  Test condition: Charge: 0.2C to 28.8V/Cell, then stored for 10 minutes.  Discharge: 0.5C to over discharge protection, then stored for 10 minutes.  When the discharge capacity drops to 80% of the initia capacity, the number of cycles completed is defined as the cycle life of the energy storage.
Operating temperature	Charging temperature: 0°C~55°C Discharging temperature: -20°C~55°C
Storage temperature	0°C~+45°C (<1 month) 0°C~+35°C (<6 month)
Storage humidity	<75% RH
Standard testing condition	Temperature: 25±2°C Humidity: ≤75%RH
Product dimension	522*238*218mm
Weight	≈ 25kg









# **LSMO 25.6V200AH-ZY Battery Module**

LSMO Battery Module be mainly used in electric vehicles, electric mobility; Solar/wind energy storage system; UPS, backup power; Telecommunication; Medical equipment; Lighting.

#### **Features**



#### **Longer Cycle Life**

life than lead acid battery, helping to minimize replacement cost and reduce total cost of owner.



#### **Higher Power**

Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.



### **Increased Flexibility**

Modular design enables deployment of up to two batteries in series and up to four batteries in parallel.



### **Lighter Weight**

About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.



#### **Superior Safety**

Automatic protection with internal battery management system.



### **Wider Temperature Range**

-20°C~60°C

**LESSO Battery Module** 

Items	LSMO 25.6V200AH-ZY
Nominal voltage	25.6V
Voltage range	25.6V~26.4V
Nominal capacity	200Ah
Minimum capacity	200Ah
Initial impedance	≤180mΩ
Charge limit voltage	28.8V
Discharge cut-off voltage	18.4V
Standard charge current	50A
Maximum charge current	100A
Standard discharge current	50A
Max continuous discharge current	100A
Charging time	Standard charging: 2~3 hours Rapid charge: 1~2 hours
Cycle Life	≥6000 Cycle life  Test condition: Charge: 0.2C to 28.8V/Cell, then stored for 10 minutes.  Discharge: 0.5C to over discharge protection, then stored for 10 minutes.  When the discharge capacity drops to 80% of the initia capacity, the number of cycles completed is defined as the cycle life of the energy storage.
Operating temperature	Charging temperature: 0°C~55°C  Discharging temperature: -20°C~55°C
Storage temperature	0°C~+45°C (<1 month) 0°C~+35°C (<6 month)
Storage humidity	<75% RH
Standard testing condition	Temperature: 25±2°C Humidity: ≤75%RH
Product dimension	522*238*218mm
Weight	≈ 35kg











## LSRW51V100AH-LFP

# **Residential Wall-mounted Energy Storage**

LSRW series battery packs are wall-mounted residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with a mainstream inverter in diferent scenarios to save your electrical bill & back-up your power during grid outage or unavailable.

### **Features**



#### Safety

High safety LiFePO<sub>4</sub> battery; Fire-safe, non-toxic;Lithium ferrous phosphate (LFP) cells.Meet UL1973,IEC62619 UN38.3 certification



#### Long-lasting

15 years life design. Long cycle life and superior performance



#### **Flexible**

Long cycle life (>6000cycles@ 80% DOD) Wall mounted



#### Wide compatibility

Compatible with multiple brands of mainstream inverter use



#### **Environment protection**

Non-toxic and pollution-free



#### **Smart WiFi**

Support wifi APP and cloud platform monitor







## **Residential Wall-Mounted Energy Storage**

Items	LSRW51V100AH-LFP
Nominal voltage	51.2V
Nominal capacity	100Ah
Nominal energy	5.12kWh
Usable energy	5.0kWh
Recommended charge current	50A
Max. continuous charge current	80A
Max. continuous discharge current	80A
Peak discharge current	300A/3s
Max. continuous discharge power	5kW
Peak discharge power	15kW/3s
Self-discharge rate (Sleep mode)	Capacity: ≤ 3% / month; ≤ 20% / years
Standard charge voltage	56.0V
Floating charge voltage	54.0V
End of discharge voltage	43.2V
Communication	RS485 / CAN
IP rating	IP55
Cycle life	≥ 6000 cycles @80%DOD
Net weight	60.7kg
Dimension of product ( L*W*H)	454*170*698mm
Dimension of packaging ( L*W*H)	558*407*768mm
Battery housing	SGCC with white coating
Operation temperature	0~45°C (32~113°F)
Recommended operation temperature	15~30°C (59~86°F)
Storage temperature for short time	-10~45°C (14~113°F)
Storage temperature for long time	10~35°C (50~95°F)
Operation humidity	5~95%
Install altitude	≤ 4000m
Install location	Under the roof
Installation	Wall mounted
Certification	CE / IEC62619 / UL1973 / UN38.3







# **Residential Wall-mounted Energy Storage**

LSRW series battery packs are wall-mounted residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with a mainstream inverter in diferent scenarios to save your electrical bill & back-up your power during grid outage or unavailable.

### **Features**



#### Safety

High safety LiFePO<sub>4</sub> battery; Fire-safe, non-toxic; Lithium ferrous phosphate (LFP) cells.



#### Long-lasting

10 years life design. Long cycle life and superior performance



#### Portable installation

Wall-mounted installation method, does not occupy ground space.



#### Wide compatibility

Compatible with multiple brands of mainstream inverter use



#### **Environment protection**

Non-toxic and pollution-free



# **Residential Wall-Mounted Energy Storage**

Items	LSRW51V205AH-LFP
Nominal voltage	51.2V
Nominal capacity	205Ah
Nominal energy	10.49kWh
Usable energy	10kWh
Recommended charge current	100A
Max. continuous charge current	120A
Max. continuous discharge current	150A
Max. continuous discharge power	7.6kW
Self-discharge rate (Sleep mode)	Capacity: ≤ 3.5% / month
Standard charge voltage	56.0V
End of discharge voltage	40V
Communication	RS485 / CAN
IP rating	IP55
Cycle life	≥ 6000 cycles @90%DOD
Net weight	86.5kg
Dimension of product ( L*W*H)	700*400*240mm
Battery housing	SGCC with white coating
Operation temperature	0~60°C (32~140°F)
Recommended operation temperature	15~30°C (59~86°F)
Storage temperature for short time	-10~45°C (14~113°F)
Storage temperature for long time	10~35°C (50~95°F)
Operation humidity	5~95%
Install altitude	≤ 4000m
Install location	Under the roof
Installation	Wall mounted, Floor standing
Certification	UN38.3 / MSDS









# **Residential Wall-mounted Energy Storage**

LSRW series battery packs are wall-mounted residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with a mainstream inverter in different scenarios to save your electrical bill & back-up your power during grid outage or unavailable.

### **Features**



#### Safety

High safety LiFePO<sub>4</sub> battery; Fire-safe, non-toxic;Lithium ferrous phosphate (LFP) cells.



#### Long-lasting

10 years life design. Long cycle life and superior performance



#### Portable installation

Wall mounted installation method, wheeled mobility.



### Wide compatibility

Compatible with multiple brands of mainstream inverter use



#### **Environment protection**

Non-toxic and pollution-free



# **Residential Wall-Mounted Energy Storage**

Items	LSRW51V280AH-LFP
Nominal voltage	51.2V
Nominal capacity	280Ah
Nominal energy	14.3kWh
Usable energy	14kWh
Recommended charge current	140A
Max. continuous charge current	200A
Max. continuous discharge current	200A
Max. continuous discharge power	10kW
Self-discharge rate (Sleep mode)	Capacity: ≤ 3% / month
Standard charge voltage	56.0V
End of discharge voltage	40V
Communication	RS485 / CAN
IP rating	IP55
Cycle life	≥ 6000 cycles @90%DOD
Net weight	122kg
Dimension of product ( L*W*H)	700*600*248mm
Battery housing	SGCC with white coating
Operation temperature	0~60°C (32~140°F)
Recommended operation temperature	15~30°C (59~86°F)
Storage temperature for short time	-10~45°C (14~113°F)
Storage temperature for long time	10~35°C (50~95°F)
Operation humidity	5~95%
Install altitude	≤ 4000m
Install location	Floor standing
Certification	UN38.3 / MSDS







# **Residential Stacked Energy Storage**

LSRS series battery packs are stack type residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with any mainstream inverter in different scenario to save your electrical bill & back-up your power during grid outage or when power is unavailable.

#### **Features**



#### Safety

Safer lithium iron phosphate, designed to comply with IEC, UL standards.



#### Wide compatibility

Compatible with multiple brands of mainstream inverter use.



#### **Convenient installation**

The installation can be completed by simple stacking.



#### Long-lasting

15 years life design. Long cycle life and superior performance.



#### **Scalability**

10.24 KWh  $\sim$  20.48 KWh can be extended.



### WiFi optional

WIFI configuration is optional.





UL1973 UN38.3





# **Residential Stacked Energy Storage**

Items	LSRS205V50AH-LFP LSRS307V50AH-LFP		LSRS410V50AH-LFP
Number of battery modules	2	3	4
Manage battery energy	10.24kWh	15.36kWh	20.48kWh
Nominal voltage	204.8V	307.2V	409.6V
Operation voltage range	185.6V~233.6V	278.4V~350.4V	371.2V~467.2V
Manage battery capacity		50Ah	
Max. charge current		50A	
Max. discharge current		50A	
Communication to inverter		CAN / RS485	
Wifi		Support	
Display	SOC status indicator LED		
IP rating	IP55		
Cycle life	6000 Cycles @25°C @70%EOL @0.2C charge & 0.5C discharge, 90% DOD		
Battery module weight		≈ 60kg	
Module dimension (L*W*H)	630*440*590 mm	630*440*745 mm	630*440*900 mm
Cell type	LFP -	Lithium iron phosphate (LiFePC	14)
Design life		15 years (25°C/77°F)	
Charge temp. range	0~50°C(32~122°F)		
Discharge temp. range	-10~50°C(14~122°F)		
Operating temperature	Charge:0~50°C(32~122°F) Discharge: -10~55°C (14~131°F)		
Relative humidity	5%~95%		
Install altitude	≤4000m		
Certification	CE / IEC62619 / UL1973 / UL9540A/UN38.3		

- 1. Test conditions: 90% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C.
- 2. Charge/discharge derating occurs when the operating temperature from -20°C to 5°C & 45°C to 55°C.
- 3. The maximum charge and discharge is 1C, the maximum requested charge and discharge current size according to the agreement when connected to the inverter.











# LSRR51V100AH-LFP

# **Residential Rack Energy Storage**

LSRR series battery packs are rack type residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with any mainstream inverter in different scenarios to reduce your electrical bill & back-up your power during grid outage or when power is unavailable




Support up to 32 units in parallel, scale from 5 kWh to 160 kWh configuration without external controller



### 4 types of installation

Compact & Flexible. 3U (133mm) standard height design. Optional bracket kits for different installation senarios.

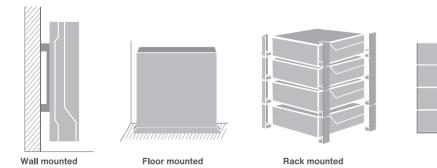



Stack

## **LESSO**

## **Residential Rack Energy Storage**

Items	LSRR51V100AH-LFP	
Nominal voltage	51.2V	
Nominal capacity	100Ah	
Nominal energy	5.12kWh	
Usable energy	4.92kWh	
Operating voltage range	44.8V~56.0V	
Charge voltage	56V	
Float voltage	54.6V	
Recommended charge current	50A	
Max. charge current	70A	
Recommended discharge current	50A	
Max. discharge current	100A	
Communication	RS485 /CAN	
Peak discharge current / unit	101~119A@5mins 120~149A@15S	
IP rating	IP20	
Cycle life	≥ 6000 cycles @90%DOD	
Net weight / unit	47kg	
Gross weight / unit	50kg	
Dimension of product / unit	482*133.5*460mm	
Dimension of packaging / unit	574*217*526mm	
Cell type	Lithium-iron phosphate (LiFePO <sub>4</sub> )	
Design life	15 years	
Operation temperature	-10~50°C (14~122°F)	
Storage temperature	-10~45°C(14~113°F)	
Relative humidity	5% - 90%, No condensation	
Install altitude	≤ 4000m	
Install location	Indoor	
Installation	Wall mounted / Floor mounted / Stack / Rack mounted	
Certification	CE / IEC62619 / UL1973 / UN38.3	

- [1] Test conditions: 90% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C
- [2] Available energy of the system may be different from various inverter brands
- [3] Derating occurs when the operating temperature from -10°C to 10°C & 40°C to 50°C



The above installation package is for your reference. Contact our sales team to choose accessories based on your needs!

- 1 Unique rack for stacking installation battery modules.
- The data exchange between the battery and the inverter is necessary, and some models use RS485 mode or CAN mode for communication. Please refer to the user manual for specific model information. The length of this communication cable is 2 meters.
- The terminals of the battery are equipped with specially designed quick plug connector for easy installation and disassembly. Can be used for the battery parallel wires & output wires fabrication.
- 4 Pre fabricated with quick plug connector and pre-insulated terminal, which use for wiring between battery and inverter or combiner box. The length of this cable kit is 2 meters with 25 mm<sup>2</sup>
- 6 Pre fabricated with quick plug connectors, which use for wiring battery parallel connction. The length of this cable kit is 0.25 meter with 35 mm<sup>2</sup>.
- 6 Battery installation cabanet, there has 6 version for selection. (2/3/6/10/12/16 layers)









# P3 Plus Portable Energy Storage

### **Features**



Paired with a powerful 300W inverter, be able to power 80% of household device.



With ultra-safe LiFePO4batteries and high-quality BMS technology protection, making it areliable backup power supply.



Offering 4 charing methods, to ensure that the device maintains the charge reserve anytime and anywhere.

(4)

4 outputs, AC ports, standard USB-A/Type-C/car port and wireless charging pad, meeting various needs.

# **LESSO**

# **Portable Energy Storage**

Product Model		P3 Plus	
Builtin Battery		Lithium iron phosphate battery (378Wh)	
Input Ch	arging	Power adapter: 120W/20V	
Solar Pa	nel Input	MPPT, 12.5V~25V/8A Max	
Fully Cha	arged Time	FDC solar: 4h; Power adapter: 3.5h	
	USB1	QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP	
USB Output	USB2	QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP	
	TYPE-C1	PD65W 5V3.25A 9V3.25A 12V3.25A 15V3.25A 20V3.25A	
DC Outp	ut	12V/8.3A	
		CN: 220V+10V, 60Hz/50Hz+3Hz	
A.C. Oudmid	Sine Wave Output	US: 110V+10V, 60Hz/50Hz+3Hz	
AC Output		JP: 100V+10V, 60Hz/50Hz+3Hz	
		EU/UK: 230V+10V, 60Hz/50Hz+3HZ	
AC Cont	inuous Output	300W	
AC Max	Output	600W about 1s	
Solar Inp	out	12.5V-25V 120W (Max)	
Operatio	n Temperature	-10~40°C	
Charging Temperature		0~40°C	
Battery Capacity		378Wh	
Cycle Lif	e	2000 times	
Dimensio	ons(mm)	280 × 210 × 170	
Weight(k	(g)	5.3	







UPS uninterruptible charging, emergency support, supports charging while discharging.

Brand new dual fast charging, fully charged in 2 hours with mains power, fully charged in 4 hours with solar power.

Compact size, rich interfaces, equipped with outdoor lighting, supports charging with AC and solar panels.

# **LESSO**

# **Portable Energy Storage**

	Product Model		P5 Pro	
	Battery		LiCoO2 22.2V 499.5Wh	
	Input		Fast charging CN: 200V-240V/50HZ, rated input power: 430W US/JP: 100V-120V/60Hz, rated input power: 430W EU/AU/UK: 220V-240V/50Hz, rated input power: 430W	
			Solar panel: MPPT 100W, 18V~24V, 5.6A	
		USB-A	MAX 36W 5V3A 9V3A 12V3A support Apple 2.4A, QC2.0/3.0, FCP, AFC, DCP, SCP	
Output	USB Output	TYPE-C	MAX 60W 5V3A 9V3A 12V3A 15V3A 20V3A support Apple 2.4A, PPS/PD3.0/PD2.0; QC4+/QC4/QC3.0/QC2.0; AFC; FCP; SCP; PE2.0/PE1.1; SFCP fast charging protocol	
	DC Output	Car Port	12V 10A 120W Max	
	AC Output	Sine wave	CN: 220V~240VAC single-phase output, 50Hz, rated output power: 600W US/JP: 100V~120VAC single-phase output, 60Hz, rated output power: 600W EU/AU/UK: 220V~240VAC single-phase output, 50Hz, rated output power: 600W	
	LED Light		Bright - Off - SOS (3 modes cycle)	
	Cycle Life		>1000 times	
	Protections		A. over voltage protection B. low voltage protection C. discharge over current protection D. short circuit protection E. charge over current protection F. temperature protection	
	Accessories		AC charging line / instruction book	
	Dimensions(mm)		251*145*152	
	Weight(kg)		5.1	
	Charging Te	mperature	0~45°C	
	Working Temperature		-20~60°C	

Remarks: specifications are subject to change without notice

#### **Product Specification**











f in o lesso Solar



# P6 Plus Portable Energy Storage

### **Features**



With ultra-safe LiFePO4batteries and high-quality BMS technology protection, making it areliable backup power supply.

Offering 4 charing methods, to ensure that the device maintains the charge reserve anytime and anywhere.

8 outputs, AC ports, standard USB-A/Type-C/car port and wireless charging pad, meeting various needs.

# **LESSO**

# **Portable Energy Storage**

Product Model		P6 Plus	
Builtin Battery		Lithium iron phosphate battery (576Wh)	
Input Cha	arging	Power adapter: 120W/20V	
Solar Par	nel Input	MPPT, 12.5V~25V/8A Max	
Fully Cha	rged Time	FDC solar: 5.5h Power adapter: 5h	
	USB1	QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP	
LIOD Outside	USB2	QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP	
USB Output	TYPE-C1	PD65W 5V3,25A 9V3,25A 12V3,25A 15V3,25A 20V3,25A	
	TYPE-C2	PD30W 5V2.5A 9V2.5A 12V2.5A	
DC Outpo	ut	12V/8.3A	
		CN: 220V+10V, 60Hz/50Hz+3Hz	
A C C	Sine Wave Output	US: 110V+10V, 60Hz/50Hz+3Hz	
AC Output		JP: 100V+10V, 60Hz/50Hz+3Hz	
		EU/UK: 230V+10V, 60Hz/50Hz+3HZ	
AC Continuous Output		600W	
AC Max (	Output	900W about 1s	
Solar Inp	ut	12.5V-25V 120W (Max)	
Operation Temperature		-10~40°C	
Charging Temperature		0~40°C	
Battery Capacity		576Wh	
Cycle Life		2000 times	
Dimensio	ons(mm)	320 × 210 × 226	
Weight(kg)		7.1	





# **Portable Energy Storage**

#### **Features**

Rich output interfaces, suitable for various charging scenarios.

High power, large capacity, supporting most electrical appliances.

Adapted to 200W solar foldable panel charging, supporting simultaneous charging and discharging.

8 output ports, capable of supporting eight devices using electricity simultaneously.

# **LESSO**

# **Portable Energy Storage**

Product model	P10
Built-in Battery	Lithium iron phosphate battery (1008Wh)
Input Charging	Power adapter: 200W/20V
Solar Panel Input	MPPT,18V~22V/10.0A Max
Fully Charged Time	FDC solar:4h Power adapter:6.5h
USB Output	USB1: QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP USB2: 5V2.4A Type-C1: PD65W 5V5A 9V5A 12V5A 15V5A 20V5A Type-C2: 5V2.4A
DC Output	13.5V/9A
AC Output	AC SineWave Output CN: 220V±10V, 60Hz/50Hz±3Hz US/JP: 110V±10V, 60Hz/50Hz±3Hz EU/UK: 230V±10V, 60Hz/50Hz±3Hz
AC Continous Ouput	1200W
AC Max Output	2000W about 1s
Solar input	12V-30V 200W (Max)
Operation temperature	-10~40°C
Charging temperature	0~40°C
Battery capacity	1008Wh
Lifecycle	2000 times
Size/weight	290mm*220mm*230mm
Weight	10.5kg

Remarks: specifications are subject to change without notice

### **Product Specification**













# **Portable EV Charger**









LSAC7K-P-C2

### **Easy switching among multi-gear currents**

The default current is 10A, if this current is insufficient for charging at this time, you can adjust the charging current.

### Strong compatibility and suitability for various models

Suitable for most new energy vehicle models.

#### **Protection grade: IP66**

It has an IP66 waterproof and dust-proof function, and always ensures the charging safety of your car, even in severe outdoor environments.

### **Reservation charging and avoiding peak hours**

To take advantage of the cheap price at night and save on power, you may schedule a charging session for 1~10 hours (LSAC3K5-P-C2 / LSAC7K-P-C2 : 1~24hours).

#### 8 Safety features

Protection against overheating, overcurrent, leakage, overvoltage, output exception, CP fault, communication fault, and relay fault.

#### **Compressive, strong and durable**

The housing is made of high-strength PC material with strong, compressive resistance.


### **Technical parameter**

-		
-		
screen		
50Hz		
>10ΜΩ		
-20°C~+50°C		
5m (customizable)		
control mainbox: 200 (L) *90 (M) *55mm (H)		
UL94-V0		
GB/T20234.2-2015, GB/T18487.1-2015		
>10MΩ -20°C~+50°C 5m (customizable)  control mainbox: 200 (L) *90 (M) *55mm (H)  UL94-V0		







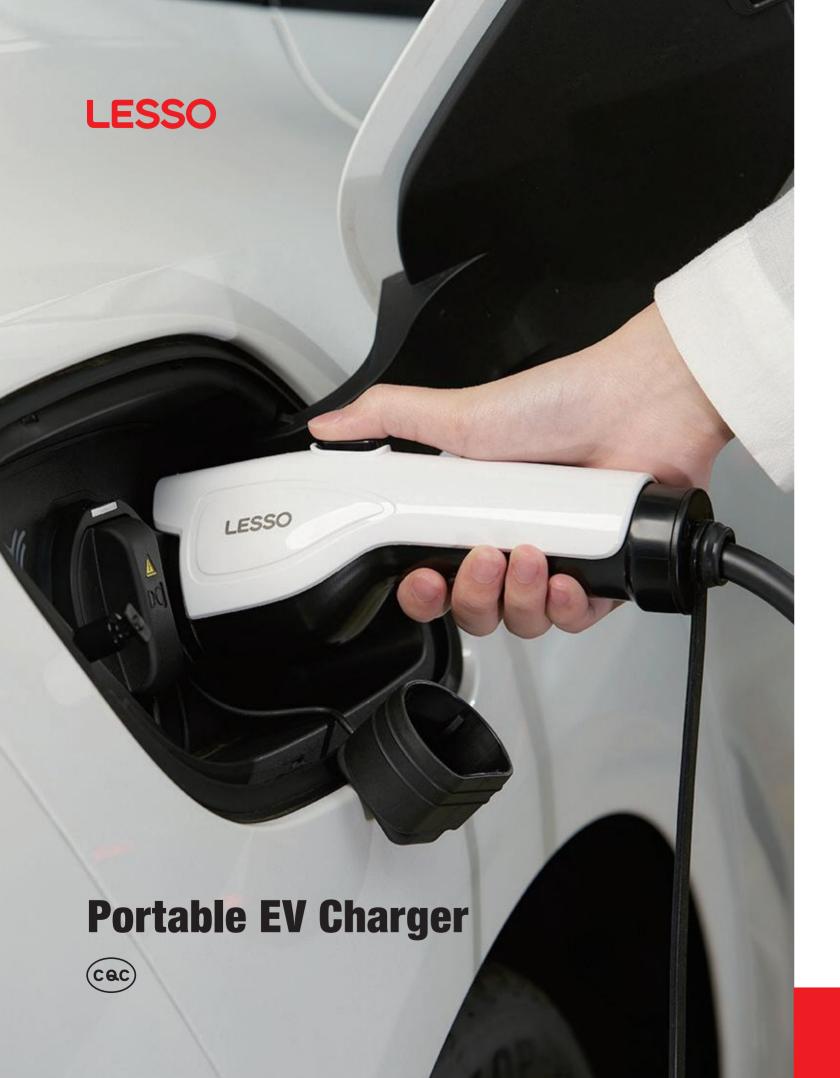

**V2L Discharger** 



#### **Portable Power, Anywhere**

Power Your Outdoor Fun – Easily solve power issues for non-stop music parties, BBQs, coffee brewing, and more.

#### **Safety Protections**

Output Fault, CP Fault.

# Strong compatibility and suitability for various models

Suitable for most new energy vehicle models.

### **Portable & Stylish**

Compact and lightweight, it comes with a handy carry pouch for easy storage and travel.

### **Technical parameter**

Model	LS-D16A-2		
Rated Output Voltage	250V		
Max Output Current	16A		
Max Output Power	4kW		
Executive Standards	GB/T 2099.7-2015, GB/T 20234.1-2015, GB/T 20234.2-2015		
Product Wiring	3*1.5mm²		
Operation Temperature	-20°C~+50°C		



**V2L** Discharger

Plug and Play, Easy Power Access





# **EV** Charger



LSACS-E-32/230-B01-1 LSACS-E-32/230-B01-2

#### **Easy switching among multi-gear currents**

The default current is 32A, if this current is insufficient for charging at this time, you can adjust the charging current.

### Strong compatibility and suitability for various models

Suitable for most new energy vehicle models.

#### **Protection grade: IP55**

It has an IP55 waterproof and dust-proof function, and always ensures the charging safety of your car, even in severe outdoor environments.



LSACS-E-32/230-B02-1 LSACS-E-32/230-B02-2

#### **Reservation charging and avoiding peak hours**

To take advantage of the cheap price and save on power, you may schedule a charging session for 1~10 hours

#### 8 Safety features

Protection against overheating, overcurrent, leakage, overvoltage, output exception, CP fault, communication fault, and relay fault.

### **Compressive, strong and durable**

The mainbox is made of high-strength PC material with strong, compressive resistance.

#### **Technical parameter**

Types	LSACS-E-32/230-B01-1	LSACS-E-32/230-B01-2	LSACS-E-32/230-B02-1	LSACS-E-32/230-B02-2
Output Power	7kW			
Rated Output Voltage		Two-phas	se 230VAC	
Rated Output Current		3:	2A	
Display Mode	LED light	LED light	Display	Display
Use Method		Swipe card/Bluetoot	h/Free vend(Optional)	
Plug Type	Type 2			
Rated Output Frequency	60Hz			
Insulation Resistance	>10ΜΩ			
Operation Temperature	-20°C~+50°C			
Cable Length	5m (customizable)			
Dimension	Control mainbox: 342 (L) *214(M) *116mm (H)			
Flame Retardant Rating	UL94-V0			
Standard	IEC 62196-1:2022, IEC 61851-1-2017			













LSACS-C-32/220-B01

### Easy switching among multi-gear currents

The default current is 32A, if this current is insufficient for charging at this time, you can adjust the charging current.

### Strong compatibility and suitability for various models

Suitable for most new energy vehicle models.

### **Protection grade: IP55**

It has an IP55 waterproof and dust-proof function, and always ensures the charging safety of your car, even in severe outdoor environments.



LSACS-C-32/220-B02

#### **Reservation charging and avoiding peak hours**

To take advantage of the cheap price and save on power, you may schedule a charging session for 1~10 hours

#### **8 Safety features**

Protection against overheating, overcurrent, leakage, overvoltage, output exception, CP fault, communication fault, and relay fault.

### **Compressive, strong and durable**


The mainbox is made of high-strength PC material with strong, compressive resistance.

#### **Technical parameter**

Types	LSACS-C-32/220-B01	LSACS-C-32/220-B02		
Output Power	7	7kW		
Rated Output Voltage	Two-pha	ase 240VAC		
Rated Output Current		32A		
Display Mode	LED light	Display		
Use Method	Swipe card/Bluetoo	oth/Free vend(Optional)		
Plug Type	(	GBT		
Rated Output Frequency	6	60Hz		
Insulation Resistance	>1	>10ΜΩ		
Operation Temperature	-20°C~+50°C			
Cable Length	5m (customizable)			
Dimension	Control mainbox: 342 (L) *214(M) *116mm (H)			
Flame Retardant Rating	UL94-V0			
Standard	GB/T18487.1-2023 , GB/T20234.1-2023			







# **30kW Integral DC Charger**

#### **Features**

- 1. Super wide constant power output voltage
- 2. Suitable for home and commercial use
- 3. Emperature controlled fan speed, lower noise
- 4. High protection for complex environment
- 5. The most complete startup method
- 6. Multiple wireless communications
- 7. Smart charging and load balancing

### **Applications**

Home, Shopping Mall, Public Parking



# **LESSO**

# 30kW Integral DC Charger

Model	LGE-303D1E5C1			
Rated power	30kW			
AC voltage	400VAC±15%			
Power supply	3P+N+PE			
DC Max current	100A			
DC voltage	150~1000VDC			
Frequency	50/60Hz			
Charge plug	CCS2			
Cable length	5m (optional)			
Enclosure	Galvanized Steel			
LED indicator	Green/Yellow/Blue/Red			
LCD display	4.3"color LCD			
RFID	Non-contact (ISO/IEC14443 A)			
Start method	QR code/Card/BLE5.0			
Interface	BLE5.0/Ethernet/4G			
Protocol	OCPP1.6J/2.0J (optional)			
Efficiency	≥95% (Half load and above)			
Power factor	≥0.98 (Rated load)			
Voltage accuracy	≤±0.5%			
Current accuracy	≤±1%			
Energy meter	Accuracy level1.0			
Emergency stop	Yes			
Protection grade	IP54			
Certification	CE,CB			
Standard	EN/IEC 61851-1,EN/IEC 61851-23,IEC 61851-24,EN/IEC 61851-21-1			
Installation	Wall mounted/Floor mounted			
Cooling	Forced air cooling			
Temperature	-25°C~+55°C			
Humidity	5%~95%			
Atitude	≤2000m			

Remarks: specifications are subject to change without notice









**Guangdong Lesso Energy Storage Technology Co., Ltd** 

# **AC&DC** integrated charger



### **Features**

- 1. With 2 DC outputs and 1 AC output, simultaneously charging
- 2. Flexible power automatic group control function brings efficient charging
- 3. Hardware level switch monitoring and interlock protection functions
- 4. Charging module adopts the glue filling process
- 5. Wide voltage constant power output
- 6. Smart charging and load balancing
- 7. Multi-standard plug: CCS2, CHAdeMO, GBT, Type2

### **Applications**

Shopping mall, Public parking, Highway

# **LESSO**

# **AC&DC** integrated charger

Model	LSADC-M-202/1000-A01	LSADC-M-202/1000-B01	LSADC-M-180/1000-C01	LSADC-M-180/1000-D01	
Rated power	1xCCS2:Max180kW 1xCHAdeMO:Max60kW 1xType2:Max22kW total:202kW	2xCCS2:Max180kW 1xType2:Max22kW total:202kW	1xCCS2:Max180kW 1xCHAdeMo:Max60kW total:180kW	2xCCS2:Max180kW total:180kW	
AC voltage	400VAC±10%				
Power supply	3P+N+PE				
DC Max current	1xCCS2:Max200A 1xCHAdeMO:Max125A 1xTyp2:Max32A	2xCCS2:Max200A 1xType2:Max32A	1xCCS2:Max200A 1xCHAdeMO:Max125A	2xCCS2:Max200A	
AC/DC voltage	1xCCS2:150~1000VDC 1xCHAdeMO:150~500VDC 1xType2:400VAC	2xCCS2:150~1000VDC 1xType2:400VAC	1xCCS2:150~1000VDC 1xCHAdeMO:150~500VDC	2xCCS2:150~1000VDC	
Frequency	50/60Hz				
Charge plug	CCS2+CHAdeMO+Type2	CCS2+CCS2+Type2	CCS2+CHAdeMO	CCS2+CCS2	
Cable length	5m (Optional)				
Enclosure	Galvanized Steel				
LED indicator	Green/Yellow/Blue/Red				
LCD display	7"color LCD				
RFID	Non-contact (ISO/IEC14443 A)				
Start method	QR code/Card/BLE5.0/PnC				
Interface	Ethernet/4G/WIFI (Optional)				
Protocol	OCPP1.6J/2.0J (Optional)				
Efficiency	≥95% (Half load and above)				
Power factor	≥0.98 (Rated load)				
Voltage accuracy	≤±0.5%				
Current accuracy	≤±1%				
Energy meter	Accuracy level1.0				
Emergency stop	Yes				
Protection grade	IP54				
Certification	CE,CB				
Standard	EN/IEC 61851-1,EN/IEC 61851-23,IEC 61851-24,EN/IEC 61851-21-1				
Installation	Wall mounted/Floor mounted				
Cooling	Forced air cooling				
Temperature	-25°C~+55°C				
Humidity	5%~95%				
Atitude	≤2000m				
Product size	850×850×1800 (W×D×H,mm)				
Net weight	324kg	324kg	318kg	318kg	





