



Guangdong Lesso Energy Storage Technology Co., Ltd

Daba Industrial Area, Longjiang Town, Foshan City, Guangdong Province, China

LESSO Group (2128) is listed in the Stock Exchange of Hong Kong.

www.lessosolar.com energy@lessosolar.com [f](#) [in](#) [v](#) [@](#) LESSO Solar

A LESSO Solar Publication, March 2026. Data contained in these specifications is subject to change without notice.

Energy Storage Product Manual

Solar Inverter | Battery | Portable Energy Storage | EV Charger

A Bright and Exciting Journey

LESSO Group is a Hong Kong-listed (2128.HK) manufacturer of building materials with an annual revenue of over USD 4.38 billion from its global operations.

Guangdong Lesso Energy Storage Technology Co., Ltd. is a comprehensive energy storage technology integrator that specializes in R&D, production, sales, and after-sales services.

Our comprehensive product line ranges from residential energy storage, portable energy storage, industrial and commercial energy storage, inverters and EV charging equipment to other energy storage products. We are committed to providing safe, efficient, and comprehensive energy storage solutions.



USD4.38 bil
Annual Sales Revenue



40 years
Production Experience



3.5GWh+
Production Capacity



Product Certification And Achievements Recognition



CQC



CE



CCC



TUV



TUV Rheinland



CB



FCC



PSE



RoHS



UKCA



UL



ETL



UN38.3



MSDS



Inverter series

Safe and Reliable, User-friendly and Economical

- Residential Inverters
- Commercial & Industrial Inverters
- Residential Storage Inverters





PV Inverter

LSBH (6~30) KTL3-OC1

Product Model	LSBH6KTL3-OC1	LSBH8KTL3-OC1	LSBH10KTL3-OC1	LSBH12KTL3-OC1	LSBH15KTL3-OC1	LSBH17KTL3-OC1	
Input	Max. DC Input Power	7800W	10400W	13000W	15600W	19500W	22600W
	Max. DC Input Voltage	1100V					
	Max. DC Input Current	18/18A			18/30A		
	MPPT Voltage Range	180~1000V					
	Recommended Working Voltage	650V					
	MPPT Number	2					
	Max. Input Strings per MPPT	1/1			1/2		
Output	Rated Output Power	6000W	8000W	10000W	12000W	15000W	17000W
	Max. AC Power	6.6kVA	8.8kVA	11kVA	13.2kVA	16.5kVA	18.7kVA
	Max. Output Current	10A	13.3A	16.7A	20A	25A	28.3A
	Rated Power Grid Voltage	400V					
	Power Grid Voltage Range	310~480Vac					
	Rated Power Grid Frequency	50Hz/60Hz					
	Grid Frequency Range	45~55Hz/55~65Hz					
	THD	<2% (under rated power)					
	Power Factor	>0.99 (under rated power) / Adjustable range 0.8(leading)~0.8(lagging)					
	DC Component	<0.5% (under rated power)					
System Data	Max. Efficiency	98.5%	98.5%	98.6%	98.7%	98.7%	98.7%
	Euro. efficiency	98%	98%	98.2%	98.1%	98.2%	98.2%
	Humidity	0~100%, no condensation					
	Cooling	Fan					
	Ambient Temperature Range	-25~+60°C					
	Consumption During Night	<1W					
	Altitude	4000m					
	Display	LED/LCD (optional)					
	Communication Interface	RS485/GPRS/Wifi (optional)					
	Mechanical Data	Size	427x510x190mm			427x439x212mm	
Weight		15kg			18kg		
Protection Level		IP66					
Conforming Standards	Standards for Grid Connection	NB/T 32004-2018; IEC61727					
	Safety Standard	NB/T 32004-2018; EC 62109-1/2					
	EMC	IEC61000-6-2/4					

Product Model	LSBH20KTL3-OC1	LSBH23KTL3-OC1	LSBH25KTL3-OC1	LSBH28KTL3-OC1	LSBH30KTL3-OC1	
Input	Max. DC Input Power	26000W	29900W	32500W	36400W	36000W
	Max. DC Input Voltage	1100V				
	Max. DC Input Current	30/30A		36/30A	36/36A	36/36A
	MPPT Voltage Range	180~1000V				
	Recommended Working Voltage	650V				
	MPPT Number	2				
	Max. Input Strings per MPPT	2/2				2/2
Output	Rated Output Power	20000W	23000W	25000W	28000W	30000W
	Max. AC Power	22kVA	25.3kVA	27.5kVA	30.8kVA	33kVA
	Max. Output Current	32A	36.5A	42A	45A	48A
	Rated Power Grid Voltage	400V				
	Power Grid Voltage Range	310~480Vac				
	Rated Power Grid Frequency	50Hz/60Hz				
	Grid Frequency Range	45~55Hz/55~65Hz				
	THD	<2% (under rated power)				
	Power Factor	>0.99 (under rated power) / Adjustable range 0.8(leading)~0.8(lagging)				
	DC Component	<0.5% (under rated power)				
System Data	Max. Efficiency	98.7%	98.8%	98.8%	98.8%	98.8%
	Euro. efficiency	98.2%	98.2%	98.2%	98.2%	98.2%
	Humidity	0~100%, no condensation				
	Cooling	Fan				
	Ambient Temperature Range	-25~+60°C				
	Consumption During Night	<1W				
	Altitude	4000m				
	Display	LED/LCD (optional)				
	Communication Interface	RS485/GPRS/Wifi (optional)				
	Mechanical Data	Size	427*439*212mm			
Weight		18kg				
Protection Level		IP66				
Conforming Standards	Standards for Grid Connection	NB/T 32004-2018; IEC61727				
	Safety Standard	NB/T 32004-2018; EC 62109-1/2				
	EMC	IEC61000-6-2/4				

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed

LSBH (18-30)KTL3LV-OC1 On-grid PV Inverter



Items	LSBH18KTL3LV-OC1	LSBH20KTL3LV-OC1	LSBH25KTL3LV-OC1	LSBH30KTL3LV-OC1
DC Input Data				
Max. DC input power	27000W	30000W	37500W	45000W
Max. DC input voltage	1000VDC			
Max. DC input current	30/30/30/30A		36/36/20/20A	
MPPT voltage range	180~1000VDC			
Recommended working voltage	650VDC			
MPPT number	4			
Max. input strings per MPP tracker	2			


Items	LSBH18KTL3LV-OC1	LSBH20KTL3LV-OC1	LSBH25KTL3LV-OC1	LSBH30KTL3LV-OC1
AC Output Data				
Rated output power	18000W	20000W	25000W	30000W
Max. AC power	19.8kVA	22kVA	27.5kVA	33kVA
Max. output current	51.9A	57.7A	72.1A	86.6A
Rated power grid voltage	400V			
Power grid voltage range	310-480			
Rated power grid frequency	50Hz/60Hz			
Grid frequency range	45~55Hz/55~65Hz			
THD	<2%(Under the rated power)			
Power factor	>0.99(Under rated power)/Adjustable range0.8(Leading)~0.8(Lagging)			
DC component	<0.5%(Under rated power)			
System Data				
Max. Efficiency(%)	98.7%	98.7%	98.7%	98.7%
Euro. efficiency(%)	98.2%	98.1%	98.2%	98.2%
Humidity	0~100%, No condensation			
Cooling	Fan			
Allowed ambient temperature range	-25°C~+60°C			
Consumption during night	<1W			
Altitude allowed	4000m			
Communication interface	RS485/WIFI/GPRS((optional)			
Display	LED/LCD(optional)			
Mechanical Data				
Size (width x height x depth)	610mm×564mm×218mm			
Weight	39kg			
Protection class	IP66			
Conforming standards				
Standards for grid connection	NB/T32004-2018;IEC61727			
Safety standard	NB/T32004-2018; IEC62109-1/2			
EMC	IEC61000-6-2/4			

Remarks: Specifications are subject to change without notice.



Product Model	LSBH33KTL3-OC1	LSBH36KTL3-OC1	LSBH40KTL3-OC1	LSBH50KTL3-OC1	
Input	Max. DC Input Power	39600W	43200W	48000W	60000W
	Max. DC Input Voltage	1100V			
	Max. DC Input Current	36A/36A/20A		36A/36A/20A/20A	
	MPPT Voltage Range	200~1000Vdc			
	Recommended Working Voltage	650V			
	MPPT Number	3		4	
	Max. Input Strings per MPPT	2/2/2		2/2/2/2	
Output	Rated Output Power	33000W	36000W	40000W	50000W
	Max. AC Power	36.3kVA	39.6kVA	44kVA	55kVA
	Max. Output Current	53A	56A	65A	80A
	Rated Power Grid Voltage	400V			
	Power Grid Voltage Range	310~480Vac			
	Rated Power Grid Frequency	50Hz/60Hz			
	Grid Frequency Range	45~55Hz/55~65Hz			
	THD	<2% (under rated power)			
	Power Factor	>0.99 (under rated power) / Adjustable range 0.8(leading)~0.8(lagging)			
	DC Component	<0.5% (under rated power)			
System Data	Max. Efficiency	98.6%	98.6%	98.6%	98.7%
	Euro. efficiency	98.1%	98.1%	98.2%	98.2%
	Humidity	0~100%, no condensation			
	Cooling	Fan			
	Ambient Temperature Range	-25~+60°C			
	Consumption During Night	<1W			
	Altitude	4000m			
	Display	LED /LCD (optional)			
	Communication Interface	RS485/GPRS/Wifi (optional)			
Mechanical Data	Size	610 x 564 x 218mm			
	Weight	37kg		39kg	
	Protection Level	IP66			
Conforming Standards	Standards for Grid Connection	NB/T 32004-2018; IEC61727			
	Safety Standard	NB/T 32004-2018; EC 62109-1/2			
	EMC	IEC61000-6-2/4			

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed

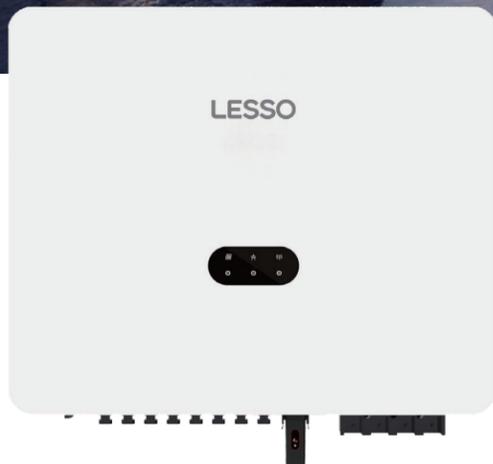

PV Inverter

LSBH (33~50) KTL3-OC1



LSBH (36-50)KTL3LV-OC1 On-grid PV Inverter

Items	LSBH36KTL3LV-OC1	LSBH40KTL3LV-OC1	LSBH50KTL3LV-OC1
DC Input Data			
Max. DC input power	54000W	60000W	75000W
Max. DC input voltage	1000VDC		
Max. DC input current	40/40/20/40/40/20A		40/40/20/20/40/40/20/20A
MPPT voltage range	180~1000VDC		
Recommended Max Power working voltage	550~850VDC		
MPPT number	6	8	
Max. input strings per MPP tracker	2		

Items	LSBH36KTL3LV-OC1	LSBH40KTL3LV-OC1	LSBH50KTL3LV-OC1
AC Output Data			
Rated output power	36000W	40000W	50000W
Max. AC power	39.6kVA	44kVA	55kVA
Max. output current	103.9A	115.4A	144.3A
Rated power grid voltage	43/(N)/PE, 220V		
Power grid voltage range	170-265Vac		
Rated power grid frequency	50Hz/60Hz		
Grid frequency range	47.5~52.5Hz/57.5~62.5Hz		
THD	<3%(Under the rated power)		
Power factor	>0.99(Under rated power)/Adjustable range0.8(Leading)~0.8(Lagging)		
DC component	<0.5%(Under rated power)		
System Data			
Max. Efficiency(%)	98.7%	98.7%	98.8%
Euro. efficiency(%)	98.1%	98.2%	98.2%
Humidity	0~100%, No condensation		
Cooling	Fan		
Allowed ambient temperature range	-25°C~+60°C		
Consumption during night	<1W		
Altitude allowed	4000m		
Communication interface	RS485/WIFI/GPRS(optional)		
Display	LED/LCD(optional)		
Mechanical Data			
Size (width x height x depth)	1160mm×611mm×286mm		
Weight	92kg		
Protection class	IP66		
Conforming standards			
Standards for grid connection	NB/T32004-2018;IEC61727		
Safety standard	NB/T32004-2018; IEC62109-1/2		
EMC	IEC61000-6-2/4		

Remarks: Specifications are subject to change without notice.



PV Inverter

LSBH (80~125) KTL3-OC1

Product Model	LSBH 80KTL3-OC1	LSBH 90KTL3-OC1	LSBH 100KTL3-OC1	LSBH 110KTL3-OC1	LSBH 125KTL3-OC1
DC Input Data					
Max. DC input power	120kW	135kW	150kW	165kW	187.5kW
Max. DC input voltage	1100VDC				
Max. DC input current	30A*8	30A*9	30A*10	30A*10	30A*10
MPPT voltage range	200~1000VDC				
Recommended working voltage	600VDC				
MPPT number	8	9	10	10	10
Max. input strings per MPP tracker	2				
AC Output Data					
Rated output power	80kW	90kW	100kW	110kW	125kW
Max. AC power	88kVA	99kVA	110kVA	121kVA	137.5kVA
Max. output current	127A	142.9A	158.8A	174.6A	199.3A
Rated power grid voltage	400Vac				
Power grid voltage range	310~480Vac				
Rated power grid frequency	50Hz/60Hz				
Grid frequency range	45~55Hz/55~65Hz				
THD	<2%(Under the rated power)				
Power factor	>0.99(Under rated power)/Adjustable range 0.8(Leading)~0.8 (Lagging)				
DC component	<0.5%(Under rated power)				
System Data					
Max. Efficiency	98.70%				98.90%
Euro. Efficiency	98.30%				98.20%
Humidity	0~95%, No condensation				
Cooling	Fan				
Allowed ambient temperature range	-25°C~+60°C				
Consumption during night	<1W				
Max. altitude	4000m (It needs to be derated when the altitude exceeds 2000m)				
Mechanical Data					
Size (width x height x depth)	1050*620*333mm				
Weight	89kg				
Protection class	IP66 (outdoor)				
Display & Communication					
Communication interface	RS485/WIFI(optional)/GPRS(optional)				
Display	LED/LCD(optional)				

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed



LSBH (225-230)KTL3HV-OC1 On-grid PV Inverter

Items	LSBH225KTL3HV-OC1	LSBH230KTL3HV-OC1
Import		
Maximum DC input power	337.5kW	
Maximum DC input voltage	1500VDC	
Maximum DC input current	40A * 12A	
MPPT Voltage Range	500~1500VDC	
Recommended MPP Operating Voltage	1080VDC	
MPPT quantity	12	
Max. input string number per MPPT	2	

Items	LSBH225KTL3HV-OC1	LSBH230KTL3HV-OC1
Output		
Rated output power	225kW	230kW
Maximum output power	247.5kW	253kW
Maximum output current	178.7A	182.6A
Rated Grid Voltage	800V	
Power Grid Voltage Range	640~920Vac	
Rated power grid frequency	50Hz/60Hz	
Power grid frequency range	45~55Hz/55~65Hz	
THD	<2% (rated power rate)	
Power factor	> 0.99 (rated power) / adjustable range 0.8 (advance) ~0.8 (Lagging lag)	
DC component	<0.5% (rated power)	
System		
Max. Efficiency	99.02%	
Euro. efficiency	98.52%	
Humidity	0~100%, with no condensation	
Cooling	Intelligent speed conditioning air cooling	
Allowed ambient temperature range	-25°C~+60°C	
Consumption during night	<2W	
Max. working altitude	5000m (> 4000m drop)	
Display	LED / LCD (optional)	
Communication interface	RS485 / WIFI / GPRS (Optional)	
Mechanical		
Size (width x height x depth)	1008mm×700mm×351mm	
Weight	107kg	
Protection class	IP66	
Standard		
Grid-connected standards	NB/T32004-2018;IEC61727	
Safety standards	NB/T32004-2018; IEC62109-1/2	
electromagnetic compatibility	IEC61000-6-2/4	

Remarks: Specifications are subject to change without notice.




LGA-HJ Series Off-grid Inverter

LGA-HJ series is a high-frequency pure sine wave inverter that can convert 12/24/48VDC to 220/230/240VAC (or 100/110/120VAC) and power the AC loads. It is designed according to the international standard with higher quality, reliability, and safety. Ranging from 350W to 5000W, LGA-HJ series is compatible with lithium-ion battery perfectly and suits any situation of DC to AC, such as RVs, boats, residentials, and places where require high quality of electrical power.

Features

- Pure sine wave output
- Input to output electrical isolation
- Digital dual closed-loop control of voltage and current
- Input surge current suppression for lithium battery systems
- Output power factor up to 1
- Simple system wiring & 180 degrees rotating LCD
- Input Protection: Reverse polarity, Low-voltage, Over-voltage
- Output Protection: Overload, Short circuit, Overheating
- Phone and PC remote control through RS485 port
- Extra external switch port
- Safety (EN/IEC62109) & EMC approved by international standards




Solar Car



Solar Home



Solar Boat



Solar Power Generator



Parameters	LGA-351ALC1-HJ	LGA-351BLC1-HJ	LGA-501ALC1-HJ	LGA-501BLC1-HJ	LGA-102ALC1-HJ	LGA-102BLC1-HJ	LGA-102DLC1-HJ
Continuous Output Power	350W@35°C@ Rated input voltage		500W@35°C@ Rated input voltage		1000W@35°C@ Rated input voltage		
Surge Power	700W@5S		1000W@5S		2000W@5S		
Surge Current When Power On	<30A		<50A		<100A		<35A
Output Voltage	100VAC/110VAC (±3%); 120VAC (-7%~+3%)				100VAC/110VAC (±3%); 120VAC (-7%~+3%)		100VAC/110VAC /120VAC (±3%)
Output Frequency	50/60Hz ± 0.2%						
Output Wave	Pure Sine Wave						
Output Distortion THD	THD ≤ 4% (Resistive load)	THD ≤ 3% (Resistive load)	THD ≤ 4% (Resistive load)		THD ≤ 4% (Resistive load)	THD ≤ 3% (Resistive load)	THD ≤ 3% (Resistive load)
Load Power factor	0.2~1 (Lad power ≤ Continuous output power)						
Rated Input Voltage	12VDC	24VDC	12VDC	24VDC	12VDC	24VDC	48VDC
Input Voltage Range	10.8~16.0VDC	21.6~32VDC	10.8~16.0VDC	21.6~32VDC	10.8~16.0VDC	21.6~32.0VDC	43.2~64.0VDC
Rated Output Efficiency ^①	>87.0%	>90.0%	>87.5%	>90.0%	>87.0%	>90.0%	>91.0%
Max. Output Efficiency ^②	>89.0% (70% loads)	>90.5% (70% loads)	>90.0% (40% loads)	>91.0% (40% loads)	>92.0% (40% loads)	>92.5% (30% loads)	>92.5% (40% loads)
Idle Current	<0.15A	<0.10A	<0.15A	<0.10A	<0.2A	<0.15A	<0.1A
No-load Current	<0.8A	<0.4A	<0.8A	<0.5A	<0.8A	<0.6A	<0.5A
USB Output	5VDC/Max.1A						—
RS485 com.prt	5VDC/200mA						
Input Terminal	M6						
Dimension (L*W*H)	229×163.5×75mm (with decorative cover) 229×160×73mm (without decorative cover)		286×163.5×78mm (with decorative cover) 286×160×78mm (without decorative cover)		371×231.5×123mm		332×231.5×123mm
Mounting Size (L*W)	205×75mm		262×75mm		345×145mm		306×145mm
Mounting Hole Size	Φ5mm				Φ6mm		
Net Weight	1.47kg		2.00kg		5.15kg	4.86kg	4.36kg

① It is measured in the condition of continuous output power and rated input voltage.

② It means the max. output efficiency when the inverter is connected with different loads under the rated input voltage.

Remarks: Specifications are subject to change without notice.

Parameters	LGA-152ALC1-HJ	LGA-152BLC1-HJ	LGA-152DLC1-HJ	LGA-202ALC1-HJ	LGA-202BLC1-HJ	LGA-202DLC1-HJ
Continuous Output Power	1500W@35°C@ Rated input voltage			2000W@35°C@ Rated input voltage		
Surge Power	3000W@5S			4000W@5S		
Surge Current When Power On	<100A	<50A		<100A	<50A	
Output Voltage	100VAC/110VAC (±3%); 120VAC (-7%~+3%)			100VAC/110VAC (±3%); 120VAC (-7%~+3%)		
Output Frequency	50/60Hz ± 0.2%					
Output Wave	Pure Sine Wave					
Output Distortion THD	THD ≤ 4% (Resistive load)			THD ≤ 5% (Resistive load)	THD ≤ 4% (Resistive load)	THD ≤ 4% (Resistive load)
Load Power factor	0.2~1 (Lad power ≤ Continuous output power)					
Rated Input Voltage	12VDC	24VDC	48VDC	12VDC	24VDC	48VDC
Input Voltage Range	10.8~16.0VDC	21.6~32.0VDC	43.2~64.0VDC	10.8~16.0VDC	21.6~32.0VDC	43.2~64.0VDC
Rated Output Efficiency①	>88.0%	>88.0%	>90.0%	>85.0%	>88.0%	>88.0%
Max. Output Efficiency②	>93.0% (30% loads)	>92.5% (30% loads)	>92.0% (30% loads)	>92.0% (30% loads)	>92.0% (30% loads)	>93.0% (30% loads)
Idle Current	<0.2A	<0.15A	<0.1A	<0.2A	<0.15A	<0.1A
No-load Current	<1.0A	<0.9A	<0.5A	<1.2A	<0.9A	<0.5A
USB Output	5VDC/Max.1A		—	5VDC/Max.1A		—
RS485 com.prt	5VDC/200mA					
Input Terminal	M6			M10	M6	
Dimension (L*W*H)	387×231.5×123mm			420×231.5×123mm	421×231.5×123mm	
Mounting Size (L*W)	361×145mm			395×145mm		
Mounting Hole Size	Φ6mm					
Net Weight	5.90kg	5.70kg	5.53kg	7.45kg	6.28kg	6.20kg

① It is measured in the condition of continuous output power and rated input voltage.

② It means the max. output efficiency when the inverter is connected with different loads under the rated input voltage.

Remarks: Specifications are subject to change without notice.

Parameters	LGA-302ALC1-HJ	LGA-302BLC1-HJ	LGA-302DLC1-HJ	LGA-402DLC1-HJ
Continuous Output Power	3000W@35°C@ Rated input voltage			4000W@35°C @ Rated input voltage
Surge Power	4800W@5S	6000W@5S	6000W@5S	8000W@5S
Surge Current When Power On	<100A	<100A	<65A	<65A
Output Voltage	100VAC/110VAC (±3%); 120VAC (-7%~+3%)			
Output Frequency	50/60Hz ± 0.2%			
Output Wave	Pure Sine Wave			
Output Distortion THD	THD ≤ 4% (Resistive load)	THD ≤ 5% (Resistive load)	THD ≤ 4% (Resistive load)	THD ≤ 4% (Resistive load)
Load Power factor	0.2~1 (Lad power ≤ Continuous output power)			
Rated Input Voltage	12VDC	24VDC	48VDC	48VDC
Input Voltage Range	10.8~16.0VDC	21.6~32.0VDC	43.2~64.0VDC	43.2~64VDC
Rated Output Efficiency①	>85.0%	>87.0%	>89.5%	>88.0%
Max. Output Efficiency②	>93.0% (30% loads)	>91.5% (30% loads)	>93.5% (30% loads)	>93.0% (30% loads)
Idle Current	<0.2A	<0.15A	<0.1A	<0.1A
No-load Current	<1.6A	<1A	<0.4A	<0.6A
USB Output	5VDC/Max.1A	5VDC/Max.1A	—	—
RS485 com.prt	5VDC/200mA			
Input Terminal	M10	M6		
Dimension (L*W*H)	550×274×148mm	521×274×148mm	516×231.5×123mm	521×274×148mm
Mounting Size (L*W)	525×145mm	495×145mm	490×145mm	495×145mm
Mounting Hole Size	Φ6mm			
Net Weight	11.60kg	9.00kg	7.35kg	10.65kg

Environment Parameters		Certification	
Work Temperature	-20°C~+60°C (Referto the Derating Curve)	safety	EN/IEC62109-1, UL1741, UL458, CSA C22.2#107.1
Storage Temperature	-35°C~+70°C	EMC (Electromagnetic compatibility)	EN61000-6-1/EN61000-6-3 FCC 47 CFR Part15, Subpart B
Relative Humidity	≤95% (N.C)	ROHS	IEC62321-3- 1
Enclosure	IP20	---	

① It is measured in the condition of continuous output power and rated input voltage.

② It means the max. output efficiency when the inverter is connected with different loads under the rated input voltage.

Remarks: Specifications are subject to change without notice.



Residential Off-grid Inverter With MPPT

Feature:

- Pure sine wave inverter
- Built-in MPPT solar charge controller
- Selectable charging current based on applications
- Configurable AC/Solar input priority via LCD setting
- Compatible to mains voltage or generator power

- Auto restart while AC is recovering
- Overload and short circuit protection
- Smart battery charger design for optimized battery performance
- Cold start function
- Parallel operation with up to 6 units (optional)

V1.3

Product Model	LSOTH3KTL-P2	LSOTH3K5TL-P2	LSOTH5KTL-P2	LSOTH5K5TL-P2	LSOTH6K2TL-P2	LSOTH8KTL-P2	LSOTH10KTL-P2	LSOTH11KTL-P2		
Input	Input sources									
	L+N+PE									
	Rated input voltage									
	220/230/240VAC									
Output	Voltage range									
	90-280VAC±3V (APL Mode) 170-280VAC±3V (UPS Mode)									
	Frequency									
	50Hz/60Hz (Auto Adaptive)									
Output	Rated power (battery inverter)	3000W	3500W	5000W	5500W	6200W	8000W	10000W	11000W	
	Rated power (PV inverter)	3000W	4500W	6500W	6500W	6500W	11000W	11000W	11000W	
	Output voltage	220/230/240VAC±5%								
	Output frequency	50/60Hz±0.1%								
	Waveform	Pure Sine Wave								
	Transfer time (adjustable)	Computers(UPS Mode)10ms , Appliance(APL Mode)20ms								
	Peak power	6000VA	7000VA	10000VA	11000VA	12400VA	16000VA	20000VA	22000VA	
	Over load ability	Battery Mode:11s@105%~150% Load, 2s@150%~200% Load, 400ms@>200% Load								
	Grid-connected operation	Output Voltage	220/230/240VAC±5%							
		Feed into the grid Voltage range	195-253VA							
Feed into the grid frequency range		49-51±1Hz/59-61±1Hz								
Nominal output current		13A	15.7A	21.7A	23.9A	26.9A	34.7A	43.4A	47.8A	
Power factor range		>0.99								
Max. conversion efficiency (DC/AC)		98%								
Battery	Battery voltage	24Vdc	24Vdc	48Vdc	48Vdc	48Vdc	48Vdc	48Vdc	48Vdc	
	Constant charging voltage	28.2Vdc	28.2Vdc	56.4Vdc	56.4Vdc	56.4Vdc	56.4Vdc	56.4Vdc	56.4Vdc	
	Floate charging voltage	27Vdc	27Vdc	54Vdc	54Vdc	54Vdc	54Vdc	54Vdc	54Vdc	
Charges	PV charging mode	MPPT	MPPT	MPPT	MPPT	MPPT	MPPT Dual MPPT	MPPT Dual MPPT	MPPT Dual MPPT	
	Max PV input power	5000W	5000W	6200W	7500W	7500W	2*5500W	2*5500W	2*5500W	
	MPPT tracking range	60-500Vdc	60-500Vdc	60-500Vdc	60-500Vdc	60-500Vdc	90-500Vdc	90-500Vdc	90-500Vdc	
	Best voltage	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	300-400Vdc	
	Max PV input voltage	500Vdc	500Vdc	500Vdc	500Vdc	500Vdc	500Vdc	500Vdc	500Vdc	
	PV max input current	18A	18A	18A	27A	27A	18A/18A	18A/18A	18A/18A	
	Max PV charging current	100A	120A	100A	100A	120A	150A	150A	150A	
	Max AC charging current	60A	100A	60A	100A	100A	150A	150A	150A	
	Max charging current	100A	120A	100A	100A	120A	150A	150A	150A	
	Display	LCD interface	CAN display running mode/load/input/output, etc							
RS232		Baud rate 2400								
Interface	Communication port	Lithium Battery BMS Communication Card WifiCard, Dry Contact								
	Parallel connect interface	No parallel function				Parallel machine (network) function				
	Environment	Operating temperature	-10-50°C							
Humidity		20%-95% (non-condensing)								
Storage temperature		-15-60°C								
Altitude		Altitude not over 1000m, derating over 1000m, max 4000m, refer to IEC62040								
Noise		≤50db								
Standards and certification	EN-IEC 60335-1, EN-IEC 60335-2-29, IEC 62109-1									

1: The paralel addition of inverters requires the addition of accesories and paralel boards. For more information, please contact the sales manager.
Remarks: Specifications are subject to change without notice.Special voltage and power requirements can be customized designed.The specific appearance is subject to the actual product.

LSOTH1-6KS-M01

Off-grid Inverter with MPPT

>> Models:

- LSOTH1KS-M01
- LSOTH1K5S-M01
- LSOTH2KS-M01
- LSOTH3KS-M01
- LSOTH4KS-M01
- LSOTH5KS-M01
- LSOTH6KS-M01




Feature

- Split phase output
- Toroidal low-loss transformer, high inverter efficiency, pure sine wave output
- Intelligent LCD integrated display
- New appearance design, built-in photovoltaic MPPT controller
- Mains charging current is adjustable, allowing users to configure battery capacity more flexibly
- Three working modes can be set (AC mode, battery mode, energy saving mode)
- The startup peak power is more than 3 times, with fully automatic and complete protection functions
- Added fault code query function to facilitate users to monitor operating status in real time
- Supports diesel generators and can be used in harsh power environments
- Suitable for both industrial and residential scenarios, wall-mounted design, easy to install

Type	LSOTH1KS-M01	LSOTH1K5S-M01	LSOTH2KS-M01	LSOTH3KS-M01	LSOTH4KS-M01	LSOTH5KS-M01	LSOTH6KS-M01
Rated Power	1000W	1500W	2000W	3000W	4000W	5000W	6000W
Peak Power(20ms)	3000VA	4500VA	6000VA	9000VA	12000VA	15000VA	18000VA
Start Motor	1HP	1.5HP	2HP	3HP	3HP	4HP	4HP
Battery Voltage	12/24/48VDC			24/48VDC	24/48VDC	48VDC	
Max AC charging current	0~30A (Depending on model)						
Size(L*W*Hmm)	500x300x140				530x335x150		
Packing Size(L*W*Hmm)	565x395x225				605x420x235		
N.W.(kg)	12	13.5	18	20	22	24	26
G.W.(kg)	13.5	15	19.5	21.5	24	26	28
Installation Method	Wall-Mounted						
Input	DC Input Voltage Range	10.5-15VDC (Single battery voltage)					
	AC Input Voltage	110V /120AC or 220VAC/240AC					
	AC Input Voltage Range	85VAC~138VAC (110VAC) / 95VAC~148VAC (120VAC) / 170VAC~275VAC(220VAC) / 190VAC~295VAC(240VAC)					
	AC Input Frequency Range	45Hz~55Hz(50Hz) / 55Hz~65Hz(60Hz)					
	AC charging method	Three-stage (constant current, constant voltage, floating charge)					
Output	Efficiency(Battery Mode)	≥85%					
	Output Voltage(Battery Mode)	110VAC or 120VAC ; 220VAC or 240AC					
	Output Frequency(Battery Mode)	50/60Hz±1%					
	Output Wave(Battery Mode)	Pure Sine Wave					
	Efficiency(AC Mode)	≥99%					
Output	Output Voltage(AC Mode)	110VAC or 120VAC ; 220VAC or 240AC					
	Output Frequency(AC Mode)	Follow input					
	Output waveform distortion (Battery Mode)	≤3% (Linear load)					
	No load loss(Battery Mode)	≤0.8% rated power					
	No load loss(AC Mode)	≤0.8% rated power					
No load loss (Energy saving Mode)	≤10W						
Battery Type	VRLA Battery	Charge Voltage :14.2V; Float Voltage:13.8V (Single battery voltage)					
	Customize battery	Charging and discharging parameters of different types of batteries can be customized according to user requirements (charging and discharging parameters of different types of batteries can be set through the operation panel)					
Protection	Battery under voltage alarm , Battery under voltage protection , Battery over voltage alarm , Battery over voltage protection Battery over voltage recovery voltage , Overload power protection , Inverter output short circuit protection , Temperature protection(ell)						
Alarm	A	Normal working condition, buzzer has no alarm sound					
	B	Buzzer sounds 4 times per second when battery failure, voltage abnormality, overload protection					
	C	When the machine is turned on for the first time, the buzzer will prompt 5 when the machine is normal					
Solar controller	Charging current	2V/24V:40A; 48V:30A	12V/24V:60A; 48V:30A	12V/24V:60A; 48V:30A	60A	24V:60A; 48V:60Aor100A	60Aor100A 160Aor100A
	PV Input Voltage Range	15V-120V(12V System); 30V-120V(24V System); 60V-120V(48V System)					
	Max PV Input Voltage(Voc) (At the lowest temperature)	150V					
	PV Array Maximum Power	12V System: 560W (40A)/840W(60A); 24V System: 1120W(40A)/1680W(60A); 48V System: 1680W(30A)/3360W(60A)/5600W(100A)					
	Standby loss	≤3W					
Maximum conversion efficiency	>95%						
Working Mode	Battery First/AC First/Saving Energy Mode (Can be set)						
Transfer Time	≤4ms						
Display	LCD						
Thermal method	Cooling fan in intelligent control						
Communication	RS485/APP (WIFI monitoring or GPRS monitoring)						
Environment	Operating temperature	-10°C~40°C					
	Storage temperature	-15°C~60°C					
	Noise	≤55dB					
	Elevation	2000m (More than derating)					
Humidity	0%~95% ,No condensation						

Note: All specifications are subject to change without prior notice

LET-G10/20/30/40/50/60/80/100LF-XT
LET-D10/20/30/40/50/60/80/100HF-XT
MPPT Solar Charge Controller

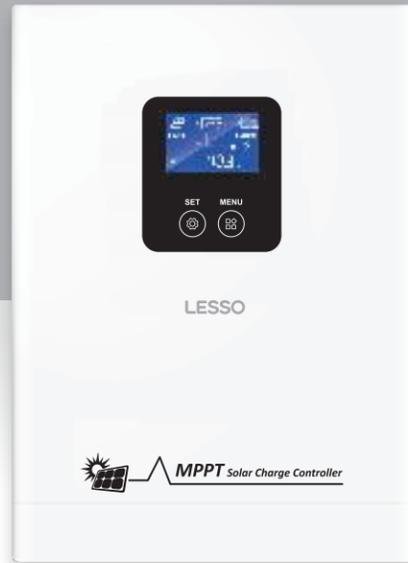

Model	LET-G10/20/30LF-XT	LET-D10/20/30HF-XT	LET-G40/50/60LF-XT	LET-D40/50/60HF-XT	LET-G80/100LF-XT	LET-D80/100HF-XT
Rated Current	10/20/30A		40/50/60A		80/100A	
Rated System Voltage	12/24V	48V	12/24V	48V	12/24V	48V
Max PV Input Voltage	120V	180V	120V	180V	120V	180V
MPPT Tracking Voltage Range	12V system: 15V-80V; 24V system: 30V-100V; 48V system: 60V-140V;					
Recommended operating Voltage Range	12V system: 15V-30V; 24V system: 30V-60V; 48V system: 60V-90V;					
PV array Max power	12V system: 140W(10A)/280W(20A)/420W(30A)/560W(40A)/700W(50A)/840W(60A)/1120W(80A)/1400W(100A); 24V system: 280W(10A)/560W(20A)/840W(30A)/1120W(40A)/1400W(50A)/1680W(60A)/2240W(80A)/2800W(100A); 48V system: 560W(10A)/1120W(20A)/1680W(30A)/2240W(40A)/2800W(50A)/3360W(60A)/4480W(80A)/5600W(100A);					

Model	LET-G10/20/30LF-XT	LET-D10/20/30HF-XT	LET-G40/50/60LF-XT	LET-D40/50/60HF-XT	LET-G80/100LF-XT	LET-D80/100HF-XT
Battery Type	Lead acid battery/Lithium battery(Users can customize charging parameters for other types of batteries)					
Floating Voltage	12V system: 13.8V; 24V system: 27.6V; 48V system: 55.2V					
Charge Voltage	12V system: 14.2V; 24V system: 28.4V; 48V system: 56.8V					
Charging Protection Voltage	12V system: 15.5V; 24V system: 31.0V; 48V system: 62.0V					
Increase Protection Voltage	12V system: 14.5V; 24V system: 29.0V; 48V system: 58.0V					
Low Voltage Recovery Point	12V system: 12.5V; 24V system: 25.0V; 48V system: 50.0V					
Discharge Limiting Voltage	12V system: 10.5V; 24V system: 21.0V; 48V system: 42.0V					
Temperature Compensation Coefficient	-3mV/°C/2V(25°C is base line) (Optional)					
Charging Mode	MPPT maximum power point tracking					
Charging Method	Three stages: constant current(MPPT); constant voltage; floating charge					
Protection	Over-voltage/under-voltage/over-temperature/Anti-reverse connection protection					
Conversion Efficiency	> 98%					
MPPT Tracking Efficiency	> 99%					
Machine Size(L*W*H)	214×155×72.8mm		238×180×82mm		315×210×106.5mm	
Package Size(L*W*H)	243×184×115(1pc)		267×209×124(1pc)		344×239×149(1pc)	
	497×379×247(8pcs)		639×278×265(6pcs)		489×355×315(4pcs)	
N.W(kg)	1.6(1pc)		2.4(1pc)		4.2(1pc)	
G.W(kg)	1.8(1pc)		2.7(1pc)		4.6(1pc)	
Display	LCD					
Thermal Method	Cooling fan in intelligent control					
Type of Mechanical Protection	IP20					
Operating Temperature	-15°C~+50°C					
Storage Temperature	-20°C~+60°C					
Elevation	2000m(Dreating above 2000m)					
Humidity	5%~95%(No condensation)					
Communication(Optional)	RS485/APP(WIFI monitoring or GPRS monitoring)					

Remarks: Specifications are subject to change without notice.


LET-XB1-HJ Series MPPT Solar Charge Controller

The LET-XB1-HJ Series is a new generation of MPPT solar charge and discharge controllers with an integrated Bluetooth module*. Users can easily read or modify settings parameters through the EPEVER APP. It boasts rapid tracking speed and response for high-power points, ensuring maximal utilization of solar energy. The device features an adaptive three-stage charging mode and a stable function for lithium battery activation, which safeguards battery charging and enhances the overall system performance and lifespan. It also offers a constant voltage output function, which allows the PV to directly supply power to the load in sunlight without a battery, significantly broadening the system's applications. With an IP33 protection and a low self-consumption, along with optimized EMC and comprehensive protection functions, it is suitable for various fields including RVs, residential systems, and field monitoring, meeting a variety of needs.

*Only LET-XB1-HJ Series has built-in Bluetooth module

Features

- Constant voltage output
- Rated Charging Power & Current Limitation
- Certain models support Bluetooth for parameter reading and modification via app
- Operates at full load within the working temperature range
- Innovative MPPT technology & ultra-fast tracking speed
- Tracking efficiency is no less than 99.5%
- Compatible with various types of batteries: lithium, gel, sealed, etc
- Wide MPPT voltage range, maximizes the utilization of PV modules
- Automatic temperature compensation for lead-acid batteries and stable self-activation for lithium batteries
- RS485 communication interface with optional 4G or Wi-Fi modules for remote monitoring
- Low self-consumption, lower than 10mA
- IP33 enclosure, Comprehensive electronic protections



Solar Car



Solar Home




Solar Backpack



Solar Boat



Solar Street Light



Solar Power Generator

Model	LET-G10KN2R1-HJ/ LET-G10KN2B1-HJ	LET-G20KN2R1-HJ/ LET-G20KN2B1-HJ	LET-G10TN2R1-HJ/ LET-G10TN2B1-HJ	LET-G20TN2R1-HJ/ LET-G20TN2B1-HJ	LET-G30TN2R1-HJ/ LET-G30TN2B1-HJ
Electrical Parameters					
Battery Rated Voltage	12/24VDC★Auto				
Rated Charging Current	10A	20A	10A	20A	30A
Rated Discharging Current	10A	20A	10A	20A	30A
Controller Work Voltage Range	8~31V				
PV Maximum Open-Circuit Voltage	60V(At minimum operating environment temperature) 46V(At 25°C environment temperature)		100V(At minimum operating environment temperature) 92V(At 25°C environment temperature)		
MPPT Voltage Range	(Battery voltage+2V)~36V		(Battery voltage+2V)~72V		
Rated Charging Power	130W/12V 260W/24V	260W/12V 520W/24V	130W/12V 260W/24V	260W/12V 520W/24V	390W/12V 780W/24V
Maximum Conversion Efficiency	97.90%	98.30%	98.20%	98.30%	98.60%
Maximum Load Efficiency	97.00%	96.70%	96.20%	96.40%	96.60%
Static Losses (Enable the com.port)	≤10mA(12V) ≤7mA(24V)	≤10mA(12V) ≤7mA(24V)	≤15mA(12V) ≤9mA(24V)	≤15mA(12V) ≤9mA(24V)	≤15mA(12V) ≤9mA(24V)
Static Losses (Disable the com.port)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤6mA(24V)	≤8mA(12V) ≤6mA(24V)	≤8mA(12V) ≤5mA(24V)
Discharge-Circuit Voltage Drop	≤0.23V				
Temperature Compensation	-3mV/°C/2V(Default)				
Grounding Type	Common negatve				
RS485 Port	5VDC/200mA(RJ45)				
LCD Backlight Time	Default: 60s, Range: 0~999s(0s: the back ight is ON all the time)				
Mechanical Parameters					
Dimension (L*W*H)	175×143×48mm	217×158×56.5mm	175×143×48mm	217×158×56.5mm	230×165×63mm
Mounting Size (L*W)	120×134mm	160×149mm	120×134mm	160×149mm	173×156mm
Mounting Hole size	Ø5mm				
Terminal	12AWG(4mm ²)	6AWG(16mm ²)	12AWG(4mm ²)	6AWG(6mm ²)	6AWG(16mm ²)
Recommended Wire Size	12AWG(4mm ²)	10AWG(6mm ²)	12AWG(4mm ²)	10AWG(6mm ²)	8AWG(10mm ²)
Net Weight	0.58kg	0.97kg	0.59kg	0.97kg	1.30kg
Work Temperature Range	-25°C~+50°C				
Storage Temperature Range	-20°C~+70°C				
Relative Humidity	≤95%, N.C.				
Enclosure	IP33 (3 -protection againstsolid objects: protected against solids objects over 2.5mm. 3-protected against sprays to 60°from the vertical.				
Pollution Degree	PD2				

Remarks: Specifications are subject to change without notice.

Model	LET-G40TN2R1-HJ/ LET-G40TN2B1-HJ	LET-G30LN2R1-HJ/ LET-G30LN2B1-HJ	LET-G40LN2R1-HJ/ LET-G40LN2B1-HJ	LET-H30LN2R1-HJ/ LET-H30LN2B1-HJ	LET-H40LN2R1-HJ/ LET-H40LN2B1-HJ
Electrical Parameters					
Battery Rated Voltage	12/24VDC★Auto			12/24/36/48VDC★Auto	
Rated Charging Current	40A	30A	40A	30A	40A
Rated Discharging Current	40A	30A	40A	30A	40A
Controller Work Voltage Range	8~31V			8~62V	
PV Maximum Open-Circuit Voltage	100V(At minimum operating environment temperature) 92V(At 25°C environment temperature)		150V(At minimum operating environment temperature) 138V(At 25°C environment temperature)		
MPPT Voltage Range	(Battery voltage+2V)~72V		(Battery voltage+2V)~108V		
Rated Charging Power	520W/12V 1040W/24V	390W/12V 780W/24V	520W/12V 1040W/24V	390W/12V 780W/24V 1170W/36V 1560W/48V	520W/12V 1040W/24V 1560W/36V 2080W/48V
Maximum Conversion Efficiency	98.60%	97.60%	97.90%	98.10%	98.50%
Maximum Load Efficiency	96.50%	95.10%	95.40%	96.90%	97.20%
Static Losses (Enable the com.port)	≤15mA(12V) ≤9mA(24V)	≤15mA(12V) ≤9mA(24V)	≤15mA(12V) ≤9mA(24V)	≤14mA(12V) ≤9mA(24V) ≤8mA(36V) ≤7mA(48V)	≤14mA(12V) ≤9mA(24V) ≤8mA(36V) ≤7mA(48V)
Static Losses (Disable the com.port)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤5mA(24V)	≤8mA(12V) ≤5mA(24V) ≤5mA(36V) ≤5mA(48V)	≤8mA(12V) ≤5mA(24V) ≤5mA(36V) ≤5mA(48V)
Discharge-Circuit Voltage Drop	≤0.23V				
Temperature Compensation	-3mV/°C/2V(Default)				
Grounding Type	Common negatve				
RS485 Port	5VDC/200mA(RJ45)				
LCD Backlight Time	Default: 60s, Range: 0~999s(0s: the back ight is ON all the time)				
Mechanical Parameters					
Dimension (L*W*H)	255×185×67.8mm	255×185×67.8mm	255×187×75.7mm	255×187×75.7mm	255×189×83.2mm
Mounting Size (L*W)	200×176mm	200×176mm	200×178mm	200×178mm	200×180mm
Mounting Hole size	Φ5mm				
Terminal	6AWG(16mm ²)	6AWG(16mm ²)	6AWG(16mm ²)	6AWG(16mm ²)	6AWG(16mm ²)
Recommended Wire Size	6AWG(16mm ²)	8AWG(10mm ²)	6AWG(16mm ²)	8AWG(10mm ²)	6AWG(16mm ²)
Net Weight	1.72kg	1.66kg	2.08kg	2.16kg	2.60kg
Work Temperature Range	-25°C~+50°C		-25°C~+45°C		
Storage Temperature Range	-20°C~+70°C				
Relative Humidity	≤95%, N.C.				
Enclosure	IP33 (3 -protection againstsolid objects: protected against solids objects over 2.5mm. 3-protected against sprays to 60°from the vertical.)				
Pollution Degree	PD2				

Remarks: Specifications are subject to change without notice.



LET-XB2-HJ Series MPPT Solar Charge Controller

The LET-XB2-HJ series is a new generation of high-current MPPT charge and discharge controller. It features load output capability and delivers superior MPPT tracking and conversion efficiency. The series is compatible with various lithium battery types and supports three-stage charging management to extend battery lifespan. Its exceptional low-power design significantly reduces static consumption, prolonging system standby time.

Comprehensive electronic protection and flexible communication options (WiFi, Bluetooth, 4G, etc.) further enhance system reliability and monitoring capabilities. It is widely used in RVs, boats, industrial monitoring, and small to medium-sized solar power systems.

Features

- Supports 12V/24V/36V/48V systems; Charge/Discharge current: 50A-100A
- All metal die-casting shell, IP43(1)
- Supports two PV inputs(2)
- Max. MPPT tracking efficiency: 99.9%; Max. Conversion efficiency: 98.5%
- Compatible with AGM, Gel, Flooded, LiFePO4 batteries, etc.
- Constant voltage output functio: Enables direct load supply with sufficient PV energy
- Communication interface with electrical isolation
 - CAN: Parallel operation of up to 6 devices(with or without batteries)
 - BMS: Ensures reliable lithium battery charge/discharge management(3)
 - RS485: Optional Bluetooth, WiFi, or 4G modules(4)
- Real-time data recording, event logging, and power statistics function
- EMC compliant (CLASS B)
 - (1) IP32 without terminal cover
 - (2) LET-H100LN242-HJ, LET-H100LN2B2-HJ; LET-H100HN2R2-HJ;LET-H80HN242-HJ support two PV inputs
 - (3) Requires BMS-LINK module for others company batteries
 - (4) LET-XXXXXXBXX-HJ models feature integrated Bluetooth

Model	LET-H50HN2R1-HJ	LET-H60LN2R1-HJ LET-H60LN2B1-HJ	LET-H60HN2R1-HJ	LET-H75LN2R1-HJ
Electrical Parameters				
Battery Rated Voltage	12/24/48VDC~Auto			
Controller Operating Voltage Range	8~62V			
Battery Type	AGM (Default) / Gel / Flooded / User			
Lithium Battery Type	LiFePO4 / Li (NiCoMn)O2 / User			
Rated Charging / Discharging Current	50A	60A	60A	75A
Rated Charging Power	650W/12V; 1,300W/24V; 2,600W/48V	780W/12V; 1,560W/24V; 3,120W/48V	780W/12V; 1,560W/24V; 3,120W/48V	975W/12V; 1,950W/24V; 3,900W/48V
Maximum Charging Power	650W/12V; 1,300W/24V; 2,600W/48V	780W/12V; 1,560W/24V; 3,120W/48V	780W/12V; 1,560W/24V; 3,120W/48V	975W/12V; 1,950W/24V; 3,900W/48V
Rated Load Current	50A	60A	60A	75A
Maximum Load Current	50A	60A	60A	75A
PV Maximum Open-circuit Voltage	200V (@ lowest temperature); 180V (@ 25°C)	150V (@ lowest temperature); 138V (@ 25°C)	200V (@ lowest temperature); 180V (@ 25°C)	150V (@ lowest temperature); 138V (@ 25°C)
MPPT Operating Voltage Range	(Battery voltage plus 2V, and>28V) to 144V (@ 25°C)	(Battery voltage plus 2V, and>28V) to 108V (@ 25°C)	(Battery voltage plus 2V, and>28V) to 144V (@ 25°C)	(Battery voltage plus 2V, and>28V) to 108V (@ 25°C)
Tracking Efficiency	≥ 99.5%			
Maximum Conversion Efficiency	98.30%	98.60%	98.10%	98.60%
Full Load Efficiency	97.10%	98.00%	98.00%	98.00%
Temperature Compensation Coefficient	-3mV/°C/2V (Default)			
Self-consumption (Enabled Communication)	98mA/12V; 60mA/24V; 46mA/48V			
Self-consumption (Disabled Communication)	48mA/12V; 25mA/24V; 14mA/48V			
Grounding Type	Common negative grounding			
Dry Contact (Oil Generator / Utility)	Rated value: 5A/30VDC; Maximum value: 0.5A/60VDC			
RS485 Communication Port	5VDC/200mA (RJ45)			
Mechanical Parameters				
Dimension (L*W*H) IP43 (Controller & White Terminal Cover)	307×253×143mm	320×263×143mm	320×263×143mm	320×263×158mm
Dimension (L*W*H) IP32 (Controller Only)	307×202×134mm	320×212×134mm	320×212×134mm	320×212×149mm
Mounting Dimension (L*W)	295×130mm	308×140mm	308×140mm	340×140mm
Mounting Hole Size	Φ7mm			
Wiring Terminal	6AWG/16mm ²	2AWG/35mm ²	2AWG/35mm ²	2AWG/35mm ²
Recommended Cable	6AWG/16mm ²		4AWG/25mm ²	
Net Weight IP43 (Controller & White Terminal Cover)	5.07kg	5.88kg	5.93kg	6.56kg
Net Weight IP32 (Controller Only)	4.86kg	5.66kg	5.71kg	6.34kg
Environmental Parameters				
Operating Temperature Range	-25°C to +60°C (Derating when temperature is higher than 40°C)			
LCD Temperature Range	-20°C to +70°C			
Storage Temperature Range	-30°C to +70°C			
Relative Humidity	5%~95% (N.C)			
Altitude	< 5,000M (Derating when altitude is higher than 2,000m)			
Enclosure	Ip43 (Controller & White Terminal Cover); IP32 (Controller Only)			
Pollution Degree	PD2			
Certification				
Safety	EN/IEC62109-1			
EMC	EN61000-6-1 / EN61000-6-3			
FCC	47 CFR Part 15, Subpart B			
ROHS	IEC62321-3-1			

Remarks: Specifications are subject to change without notice.

Model	LET-H75HN2R1-HJ	LET-H80HN2R2-HJ	LET-H100LF2R2-HJ LET-H100LF2B2-HJ	LET-H100HF2R2-HJ
Electrical Parameters				
Battery Rated Voltage	12/24/48VDC~Auto			
Controller Operating Voltage Range	8~62V			
Battery Type	AGM (Default) / Gel / Flooded / User			
Lithium Battery Type	LiFePO4 / Li (NiCoMn)O2 / User			
Rated Charging / Discharging Current	75A	80A	100A	100A
Rated Charging Power	975W/12V; 1,950W/24V; 3,900W/48V	1,040W/12V; 2,080W/24V; 4,160W/48V	1,300W/12V; 2,600W/24V; 5,200W/48V	1,300W/12V; 2,600W/24V; 5,200W/48V
Maximum Charging Power	975W/12V; 1,950W/24V; 3,900W/48V	1,040W/12V; 2,080W/24V; 4,160W/48V	1,300W/12V; 2,600W/24V; 5,200W/48V	1,300W/12V; 2,600W/24V; 5,200W/48V
Rated Load Current	75A	80A	100A	100A
Maximum Load Current	75A	80A	100A	100A
PV Maximum Open-circuit Voltage	200V (@ lowest temperature); 180V (@ 25°C)	200V (@ lowest temperature); 180V (@ 25°C)	150V (@ lowest temperature); 138V (@ 25°C)	200V (@ lowest temperature); 180V (@ 25°C)
MPPT Operating Voltage Range	(Battery voltage plus 2V, and>28V) to 144V (@ 25°C)		(Battery voltage plus 2V, and>28V) to 108V (@ 25°C)	(Battery voltage plus 2V, and>28V) to 144V (@ 25°C)
Tracking Efficiency	≥ 99.5%			
Maximum Conversion Efficiency	98.10%	98.50%	98.60%	98.50%
Full Load Efficiency	97.50%	97.50%	98.00%	97.60%
Temperature Compensation Coefficient	-3mV/°C/2V (Default)			
Self-consumption (Enabled Communication)	98mA/12V; 60mA/24V; 46mA/48V			
Self-consumption (Disabled Communication)	48mA/12V; 25mA/24V; 14mA/48V			
Grounding Type	Common negative grounding			
Dry Contact (Oil Generator / Utility)	Rated value: 5A/30VDC; Maximum value: 0.5A/60VDC			
RS485 Communication Port	5VDC/200mA (RJ45)			
Mechanical Parameters				
Dimension (L*W*H) IP43 (Controller & White Terminal Cover)	320×263×158mm	352×263×158mm	352×263×158mm	352×263×158mm
Dimension (L*W*H) IP32 (Controller Only)	320×212×149mm	352×212×149mm	352×212×149mm	352×212×149mm
Mounting Dimension (L*W)	308×140mm	340×140mm	340×140mm	340×140mm
Mounting Hole Size	Φ7mm			
Wiring Terminal	2AWG/35mm ²		2AWG/35mm ²	
Recommended Cable	4AWG/25mm ²		4AWG/35mm ²	
Net Weight IP43 (Controller & White Terminal Cover)	6.62kg	7.79kg	7.87kg	7.87kg
Net Weight IP32 (Controller Only)	6.40kg	7.55kg	7.63kg	7.63kg
Environmental Parameters				
Operating Temperature Range	-25°C to +60°C (Derating when temperature is higher than 40°C)			
LCD Temperature Range	-20°C to +70°C			
Storage Temperature Range	-30°C to +70°C			
Relative Humidity	5%~95% (N.C)			
Altitude	< 5,000M (Derating when altitude is higher than 2,000m)			
Enclosure	Ip43 (Controller & White Terminal Cover); IP32 (Controller Only)			
Pollution Degree	PD2			
Certification				
Safety	EN/IEC62109-1			
EMC	EN61000-6-1 / EN61000-6-3			
FCC	47 CFR Part 15, Subpart B			
ROHS	IEC62321-3-1			

Remarks: Specifications are subject to change without notice.



Residential Hybrid Inverter

Split-Phase Hybrid Inverter

Battery Low Voltage

Key strengths

- Plug & Play.
- Capable of supporting 100% unbalanced loads.
- 3 phase 208Vac & paralel function available.
- 100A pass through.
- AC couple to retrofit existing solar system(on-grid & off-grid).
- Grid & diesel Generator separately connected, support storing energy from diesel generator.

Type	LSRTH5KTLS-ML01	LSRTH6KTLS-ML01	LSRTH7K6TLS-ML01	LSRTH8KTLS-ML01	LSRTH10KTLS-ML01
------	-----------------	-----------------	------------------	-----------------	------------------

PV input

Max.DC input power (kW)	7.5	9	12	12	15
No. of MPPT trackers			4		
MPPT voltage range (V)			120-500		
MAX.DC input voltage (V)			500		
MAX. input current (A)			14		
MAX. short circuit current (A)			22		

Battery input

Nominal voltage (V)			48		
MAX.charging/discharging current (A)	120/120	135/135	190/190	190/190	190/210
Battery voltage range (V)			40-60		
Battery type			Lithium /Lead-acid		
Charging strategy for Li-Ion battery			Self-adaption to BMS		

Type	LSRTH5KTLS-ML01	LSRTH6KTLS-ML01	LSRTH7K6TLS-ML01	LSRTH8KTLS-ML01	LSRTH10KTLS-ML01
AC output(on-grid)					
Nominal output power output to grid (kVA)	5	6	7.6	8	10
MAX. apparent power output to grid (kVA)	5.5	6.6	8.4	8.8	11
Output voltage range (V)	(110-120)/(220-240)split phase, 240V single phase				
Output frequency (Hz)	60(55 to 65)				
Nominal AC current output to grid (A)	20.8	25	31.7	33.3	41.7
Max. AC current output to grid (A)	22.9	27.5	34.8	36.7	45.8
Max. grid passthrough current (A)	100				
Output THDi	<3%				

AC output(back-up)

Nominal. apparent power (kVA)	5	6	7.6	8	10
Max. apparent power (kVA)	5.5	6.6	8.4	8.8	11
Nominal output voltage L-N/L1-L2 (V)	120/240				
Nominal output frequency (Hz)	60				
Automatic switchover time (ms)	<20				
Output power factor	0.8leading~0.8lagging				
Output THDu	<2%				

Protection

Grounding detection	Yes
Arc fault protection	Yes
Island protection	Yes
Battery reverse polarity	Yes
Insulation resistor detection	Yes
Residual current monitoring unit	Yes
Output over current protection	Yes
Back-up output short protection	Yes
Output over voltage protection	Yes
Output under voltage protection	Yes

General data

Mppt efficiency	99.9%
Europe efficiency (PV)	96.5%
PV to grid efficiency (PV)	97.2%
Battery to load efficiency	95.2%
PV to battery charging efficiency	96.1%
Grid to battery charging efficiency	95.0%
Output conduit (mm)	25.4
PV input conduit (mm)	25.4
BAT input conduit (mm)	35.4
Operating temperature range (C)	-25~+60
Relative humidity	0-95%
Operating altitude	0~4,000m(Derating above 2,000m altitude)
Ingress protection	IP65/NEMA 3R
Built-in breaker	Optional
Weight (kg)	48kg(50kg with breaker)
Dimensions W*H*D (mm)	450 x 820 x 240
Cooling	FAN cooling
Noise emission (dB)	38
Display	LCD,Touch panel(optional)
Communication with BMS/Meter/EMS	RS485, CAN
Supported communication interface	RS485, WLAN, 4G (optional)
Self-consumption	<25W
Safety	UL1741SA all options, UL1699B, CSA 22.2
EMC	FCC part 15 class B
Support diesel generator	YES

Other data

Peak power (off grid)	105%,60s / 110%,30s / 120%,10s / 150%,20ms
-----------------------	--

LEC-ABF Series

Residential Hybrid Inverter

7-10kW | Single Phase



LEC-ABF Series (7-10kW) delivers superior power capacity and intelligent energy management for high-demand residences. This advanced hybrid inverter solution combines robust 10kW output with cutting-edge efficiency to maximize solar self-consumption, significantly reduce electricity costs, and provide instantaneous backup power during grid failures.

 **10kW Continuous (20kW Peak) Output**

 **Dual MPPT with 99.9% Efficiency**

 **200A Hyper-Fast Battery Charging**

 **Smart 4-Stage Energy Scheduling**

 **10ms Seamless Backup Transition**

 **Silent Indoor Operation**

Model	LEC-702A1B1F	LEC-852A1B1F	LEC-103A1B1F
PV Input			
Max input voltage (V)	500		
Isc PV (A)	25/25	27.5/27.5	28.75/28.75
Max input current (A)	20/20	22/22	23/23
Number of MPPT channels	2		
MPPT range (Vdc)	125-435		
Vdc range @ full power (Vdc)	240-425		
Max input PV power (VA)	14000	15200	16000
Battery (charge/discharge)			
Battery type	Li-ion / Lead-acid / User-defined		
Rated nominal voltage (Range) (Vdc)	48V(40-60V)		
Rated battery voltage (V)	48		
Max charge/discharge current (A)	170	180	200
Max charge/discharge power (W)	7000	8500	10000
AC Grid (input and output)			
Rated AC voltage (Vac)	230(Single phase)		
AC input voltage (Range) (Vac)	90-275		
Rated frequency (Hz)	50/60		
Bypass over current (A)	60		
AC Load Output (stand alone)			
Rated voltage (VAC)	230(Single phase)		
Rated frequency (Hz)	50/60		
Rated current (A)	32	38	45
Rated output power (W)	7000	8500	10000
P-P output power (W)	11000	12000	15000
Load capacity of motors	4HP	5HP	6HP
Overload capability (off grid)	After triggering the overload protection the inverter will resume output after 3 minutes, 5 consecutive overloads will switch off the output until the inverter is restarted. (102%<load< load < 125%): error and output shutdown after 10s. Load > 125%: error reported and output switched off after 5s.		
Output power factor (off grid)	0.8 leading to 0.8 lagging		
Others			
Ingress protection (IP)	IP20, indoor only		
Temperature (°C)	-10~55°C, >45°C derated (14~131°F, >113°F derated)		
Inverter isolation	Non-isolated PV-AC, High frequency isolated (Battery side)		
Dimensions D*W*H (mm)	620*445*130		
Weight (kg)	27		
Altitude (m)	2000		
Cooling method	Built-in fan		
Communication			
Embedded interfaces	RS485/CAN/USB/Dry contact		
External modules (optional)	WIFI/GPRS		

Remarks: Specifications are subject to change without notice.

LEC-EBF Series

Residential Hybrid Inverter

5-6.5kW | Split Phase



LEC-EBF Series is a new type of solar energy storage inverter control inverter integrating solar energy storage & utility charging and energy storage, AC Sine wave output. It adopts DSP control and features high response speed, reliability, and industrial standard through an advanced control algorithm.



Dual battery & dual PV input compatibility



99.9% efficient MPPT, 18A per circuit



Configurable split-phase & single-phase output



4 intelligent charging modes & scheduling



Seamless power switch & energy-saving mode



Full 360° protection & multi-communication ports

Model	LEC-502E5B1F	LEC-652E5B1F
PV Input		
Max input voltage (V)	500	
Isc PV (A)	22	22
Max input current (A)	20/20	20/20
Number of MPPT channels	2/1+1	
MPPT range (Vdc)	125-435	
Vdc range @ full power (Vdc)	240-425	
Max input PV power (VA)	10000	12000
Battery (charge/discharge)		
Battery type	Li-ion / Lead-acid / User-defined	
Rated normal voltage (Range) (Vdc)	48V(40-60V)	
Rated battery voltage (V)	48	
Max charge/discharge current (A)	100	125
Max charge/discharge power (W)	5000	6500
AC Grid (input and output)		
Rated AC output voltage (Vac)	120/240VAC, Single-phase/Split-phase, L1/N/L2	
AC input voltage (Range) (Vac)	120(Range:80-130)/240(Range:160-260) VAC, Single-phase/Split-phase, L1/N/L2	
Rated frequency (Hz)	50/60	
Bypass over current (A)	45	
AC Load Output (stand alone)		
Rated voltage (VAC)	120/240VAC(Single-phase/Split-phase)	
Rated frequency (Hz)	50/60	
Rated current (A)	21/21	27/27
Rated output power (W)	5000	6500
P-P output power (W)	10000	13000
Load capacity of motors	3HP	4HP
Overload capability (off grid)	After triggering the overload protection the inverter will resume output after 3 minutes, 5 consecutive overloads will switch off the output until the inverter is restarted. (102%<load< 125%): error and output shutdown after 10s. Load > 125%: error reported and output switched off after 5s.	
Output power factor (off grid)	0.8 leading to 0.8 lagging	
Others		
Ingress protection (IP)	IP20, indoor only	
Temperature (°C)	-10~55°C, >45°C derated (14~131°F, >113°F derated)	
Inverter isolation	Non-isolated PV-AC, High frequency isolated (Battery side)	
Dimensions D*W*H (mm)	620*445*130	
Weight (kg)	18.7	
Altitude (m)	2000	
Cooling method	Built-in fan	
Communication		
Embedded interfaces	RS485/CAN/USB/Dry contact	
External modules (optional)	WiFi/GPRS	

Remarks: Specifications are subject to change without notice.

LEC-EBF Series

Residential Hybrid Inverter

8-10kW | Split Phase



LEC-EBF Series is a new type of solar energy storage inverter control inverter integrating solar energy storage & utility charging and energy storage, AC Sine wave output. It adopts DSP control and features high response speed, reliability, and industrial standard through an advanced control algorithm.



Dual battery & dual PV input compatibility



99.9% efficient MPPT, 22A per circuit



Configurable split-phase & single-phase output



4 intelligent charging modes & scheduling



Seamless power switch & energy-saving mode



Full 360° protection & multi-communication ports

Model	LEC-802E5B1F	LEC-103E5B1F
PV Input		
Max input voltage (V)	500	
Isc PV (A)	27.5/27.5	28.75/28.75
Max input current (A)	20/20	23/23
Number of MPPT channels	2	
MPPT range (Vdc)	125-435	
Vdc range @ full power (Vdc)	240-425	
Max input PV power (VA)	15200	16000
Battery (charge/discharge)		
Battery type	Li-ion / Lead-acid / User-defined	
Rated nominal voltage (Range) (Vdc)	48V(40-60V)	
Rated battery voltage (V)	48	
Max charge/discharge current (A)	190	200
Max charge/discharge power (W)	8000	10000
AC Grid (input and output)		
Rated AC output voltage (Vac)	120/240VAC, Single-phase/Split-phase, L1/N/L2	
AC input voltage (Range) (Vac)	120(Range:80-130)/240(Range:160-260) VAC, Single-phase/Split-phase, L1/N/L2	
Rated frequency (Hz)	50/60	
Bypass over current (A)	60	
AC Load Output (stand alone)		
Rated voltage (VAC)	120/240VAC(Single-phase/Split-phase)	
Rated frequency (Hz)	50/60	
Rated current (A)	33/33	42/42
Rated output power (W)	8000	10000
P-P output power (W)	12000	15000
Load capacity of motors	5HP	6HP
Overload capability (off grid)	After triggering the overload protection the inverter will resume output after 3 minutes, 5 consecutive overloads will switch off the output until the inverter is restarted. (102%<load< 125%): error and output shutdown after 10s. Load > 125%: error reported and output switched off after 5s.	
Output power factor (off grid)	0.8 leading to 0.8 lagging	
Others		
Ingress protection (IP)	IP20, indoor only	
Temperature (°C)	-10~55°C, >45°C derated (14~131°F, >113°F derated)	
Inverter isolation	Non-isolated PV-AC, High frequency isolated (Battery side)	
Dimensions D*W*H (mm)	620*445*130	
Weight (kg)	27	
Altitude (m)	2000	
Cooling method	Built-in fan	
Communication		
Embedded interfaces	RS485/CAN/USB/Dry contact	
External modules (optional)	WIFI/GPRS	

Remarks: Specifications are subject to change without notice.

LEC-ABN Series

Residential Hybrid Inverter

3-8kW | Single phase



The LEC-ABN Series (3-8kW) delivers a powerful and adaptive solution for residential solar storage, combining high efficiency, robust protection, and intelligent energy management. Designed for homes in high electricity-cost regions, it maximizes solar self-consumption, slashes energy bills, and ensures uninterrupted backup power during outages.

190A Ultra-Fast Charge/Discharge
Manage heavy loads instantly

Industry-Leading IP66 Protection
Dustproof, waterproof, install anywhere

Scale to 6 Units in Parallel
Expand power seamlessly for grid/off-grid

4-Stage Smart Charging
Cut costs via customizable energy schedules

Universal Battery Compatibility
Support lead-acid/lithium-iron battery

Remote & Touchscreen Control
Monitor and adjust via 4G/WiFi or touchscreen

Product Model	LEC-302A 3BN	LEC-362A 3BN	LEC-402A 3BN	LEC-462A 3BN	LEC-502A 3BN	LEC-602A 3BN	LEC-702A 3BD	LEC-762A 3BD	LEC-802A 3BD
PV Input									
Max input voltage (V)	500								
Isc PV (A)	22.5	22.5/22.5	22.5/22.5	22.5/22.5	22.5/22.5	22.5/22.5	37.5/22.5	37.5/22.5	37.5/22.5
Max input current (A)	18	18/18	18/18	18/18	18/18	18/18	30/18	30/18	30/18
Number of MPPT channels	1			2					
MPPT range (Vdc)	150~450								
Vdc range @ full power (Vdc)	240~425								
Max input PV power (VA)	6000	7200	8000	9200	10000	12000	14000	15200	16000
Battery (charge/discharge)									
Battery type	Li-ion/Lead-acid								
Rated battery voltage	48V(44-57V)								
Max charge/discharge current (A)	75	90	100	110	120	120	175	190	190
Max charge/discharge power (W)	3300	3960	4400	5000	5500	6000	7000	7600	8000
AC Grid (input and output)									
Rated AC voltage (VAC)	230(single phase)								
Rated frequency (Hz)	50(49-51default) (47-53 adjustable)								
Max. output current (A)	15	18	20	22	25	27	35	38	40
Max. output power (W)	3300	3960	4400	5000	5500	6000	7000	7600	8000
Max. apparent power (VA)	3300	3960	4400	5000	5500	6000	7700	8360	8800
Power factor (adjustable)	1~(0.8 leading to 0.8 lagging)								
AC Load Output (stand alone)									
Rated voltage (VAC)	230(single phase)						220/230(single phase)		
Rated frequency (Hz)	50						50/60		
Rated current (A)	14	16	18	21	23	27	35	38	40
Max. output power (W)	3000	3600	4000	4600	5000	6000	7000	7600	8000
Overload capability (off grid)	>200% for 15 sec								
Output power factor (off grid)	1~(0.8 leading to 0.8 lagging)								
Output current harmonic distortion	THD<3%(Nonlinear load); THD<1.5%(Linear load)								
Others									
Ingress protection (IP)	IP66								
Protective class	Class I								
Temperature (°C)	-25°C~+60°C								
Inverter isolation	Non-isolated PV- AC; High frequency isolated(Battery Side)								
Overvoltage category	OVC III (AC Main), OVC II (PV)								
Dimensions D*W*H (mm)	198*427*554								
Weight (kg)	20								
Altitude (m)	2000								

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed

LEC-BBD Series

Residential Hybrid Inverter

5-12kW | Three Phase



The LEC-BBD Series(5-12kW) stands out as a top-tier choice in the residential and light commercial hybrid inverter market, combining industrial-grade durability with intelligent energy management. Designed for homes, villas, and small enterprises in high electricity-cost regions, it maximizes solar self-consumption, slashes energy bills, and delivers zero-carbon resilience.

250A Ultra-Fast Charge/Discharge
Manage heavy loads instantly

Industry-Leading IP66 Protection
Dustproof, waterproof, install anywhere

Scale to 6 Units in Parallel
Expand power seamlessly for grid/off-grid

6-Stage Smart Charging
Cut costs via customizable energy schedules

Universal Battery Compatibility
Support lead-acid/lithium-iron battery

Remote & Touchscreen Control
Monitor and adjust via 4G/WiFi or touchscreen

Product Model	LEC-502B3BD	LEC-602B3BD	LEC-702B3BD	LEC-802B3BD	LEC-103B3BD	LEC-123B3BD
PV Input						
Max PV (Vdc)	1000					
Isc PV (A)	22.5	22.5	22.5	22.5/22.5	45/22.5	45/22.5
Max. PV input current/strings (A)	18	18	18	18/18	36/18	36/18
Number MPPT trackers	1			2		
MPPT range (Vdc)	200~800					
Vdc range @ full power (Vdc)	350~800					
PV Max (kW)	10	12	14	16	20	24
Battery (charge/discharge)						
Battery type	Li-ion/Lead-acid					
Battery nominal voltage (Range) (Vdc)	48V(40-60V)					
Max charge/discharge current (A)	120	125	150	190	210	250
Max charge/discharge power (W)	5000	6000	7000	8000	10000	12000
AC Grid (input and output)						
Normal AC voltage (VAC)	380/400(3W+N+PE)					
Frequency (Hz)	50/60					
Max. cont output current (A)	8.3	10	11.6	13.3	16.7	20
Max. cont output power (W)	5000	6000	7000	8000	10000	12000
Max. cont. apparent power (VA)	5500	6600	7700	8800	11000	13200
Power factor (adjustable)	0.8 leading to 0.8 lagging					
AC Load Output (stand alone)						
Normal voltage (VAC)	380/400(3W+N+PE)					
Frequency (Hz)	50/60					
Nominal current (A)	8.3	10	11.6	13.3	16.7	20
Max. cont. power (W)	5000	6000	7000	8000	10000	12000
Overload capability (off grid)	>200% for 15 sec					
Output power factor (off grid)	0.8 leading to 0.8 lagging					
Output current harmonic distortion	THD<3%(Nonlinear load); THD<1.5%(Linear load)					
Others						
Ingress protection (IP)	IP66					
Protective class	Class I					
Temperature (°C)	-25°C~+60°C					
Inverter isolation	Non-isolated PV- AC; High frequency isolated(Battery Side)					
Overvoltage category	OVC III (AC Main), OVC II (PV)					
Dimensions D*W*H (mm)	475*683*256					
Weight (kg)	38					
Altitude (m)	2000					

Remarks: Specifications are subject to change without notice; Special voltage and power requirements can be customized designed

Batteries series

Light Up Every Household





LSMO 25.6V120AH-ZY Battery Module

LSMO Battery Module be mainly used in electric vehicles, electric mobility; Solar/wind energy storage system; UPS, backup power; Telecommunication; Medical equipment; Lighting.

Features



Longer Cycle Life

life than lead acid battery, helping to minimize replacement cost and reduce total cost of owner.



Lighter Weight

About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.



Higher Power

Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.



Superior Safety

Automatic protection with internal battery management system.



Increased Flexibility

Modular design enables deployment of up to two batteries in series and up to four batteries in parallel.



Wider Temperature Range

-20°C~60°C

Items	LSMO 25.6V120AH-ZY
Nominal voltage	25.6V
Voltage range	25.6V~26.4V
Nominal capacity	120Ah
Minimum capacity	120Ah
Initial impedance	≤180mΩ
Charge limit voltage	28.8V
Discharge cut-off voltage	18.4V
Standard charge current	50A
Maximum charge current	100A
Standard discharge current	50A
Max continuous discharge current	100A
Charging time	Standard charging: 2~3 hours Rapid charge: 1~2 hours
Cycle Life	≥4000 Cycle life Test condition: Charge: 0.2C to 28.8V/Cell , then stored for 10 minutes. Discharge: 0.5C to over discharge protection, then stored for 10 minutes. When the discharge capacity drops to 80% of the initial capacity, the number of cycles completed is defined as the cycle life of the energy storage.
Operating temperature	Charging temperature: 0°C~55°C Discharging temperature: -20°C~55°C
Storage temperature	0°C~+45°C (< 1 month) 0°C~+35°C (< 6 month)
Storage humidity	<75% RH
Standard testing condition	Temperature: 25±2°C Humidity: ≤75%RH
Product dimension	522*238*218mm
Weight	≈ 25kg

Remarks: Specifications are subject to change without notice.



LSMO 25.6V200AH-ZY Battery Module

LSMO Battery Module be mainly used in electric vehicles, electric mobility; Solar/wind energy storage system; UPS, backup power; Telecommunication; Medical equipment; Lighting.

Features



Longer Cycle Life

life than lead acid battery, helping to minimize replacement cost and reduce total cost of owner.



Lighter Weight

About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.



Higher Power

Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.



Superior Safety

Automatic protection with internal battery management system.



Increased Flexibility

Modular design enables deployment of up to two batteries in series and up to four batteries in parallel.



Wider Temperature Range

-20°C~60°C

Items	LSMO 25.6V200AH-ZY
Nominal voltage	25.6V
Voltage range	25.6V~26.4V
Nominal capacity	200Ah
Minimum capacity	200Ah
Initial impedance	≤180mΩ
Charge limit voltage	28.8V
Discharge cut-off voltage	18.4V
Standard charge current	50A
Maximum charge current	100A
Standard discharge current	50A
Max continuous discharge current	100A
Charging time	Standard charging: 2~3 hours Rapid charge: 1~2 hours
Cycle Life	≥6000 Cycle life Test condition: Charge: 0.2C to 28.8V/Cell , then stored for 10 minutes. Discharge: 0.5C to over discharge protection, then stored for 10 minutes. When the discharge capacity drops to 80% of the initial capacity, the number of cycles completed is defined as the cycle life of the energy storage.
Operating temperature	Charging temperature: 0°C~55°C Discharging temperature: -20°C~55°C
Storage temperature	0°C~+45°C (< 1 month) 0°C~+35°C (< 6 month)
Storage humidity	<75% RH
Standard testing condition	Temperature: 25±2°C Humidity: ≤75%RH
Product dimension	522*238*218mm
Weight	≈ 35kg

Remarks: Specifications are subject to change without notice.



LSRW51V100AH-LFP

Residential Wall-mounted Energy Storage

LSRW series battery packs are wall-mounted residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with a mainstream inverter in different scenarios to save your electrical bill & back-up your power during grid outage or unavailable.

Features



Safety

High safety LiFePO₄ battery; Fire-safe, non-toxic; Lithium ferrous phosphate (LFP) cells. Meet UL1973, IEC62619 UN38.3 certification



Long-lasting

15 years life design. Long cycle life and superior performance



Flexible

Long cycle life (>6000cycles@ 80% DOD) Wall mounted



Wide compatibility

Compatible with multiple brands of mainstream inverter use



Environment protection

Non-toxic and pollution-free



Smart WiFi


Support wifi APP and cloud platform monitor



LESSO

Residential Wall-Mounted Energy Storage

Items	LSRW51V100AH-LFP
Nominal voltage	51.2V
Nominal capacity	100Ah
Nominal energy	5.12kWh
Usable energy	5.0kWh
Recommended charge current	50A
Max. continuous charge current	80A
Max. continuous discharge current	80A
Peak discharge current	300A/3s
Max. continuous discharge power	5kW
Peak discharge power	15kW/3s
Self-discharge rate (Sleep mode)	Capacity: ≤ 3% / month; ≤ 20% / years
Standard charge voltage	56.0V
Floating charge voltage	54.0V
End of discharge voltage	43.2V
Communication	RS485 / CAN
IP rating	IP55
Cycle life	≥ 6000 cycles @80%DOD
Net weight	60.7kg
Dimension of product (L*W*H)	454*170*698mm
Dimension of packaging (L*W*H)	558*407*768mm
Battery housing	SGCC with white coating
Operation temperature	0~45°C (32~113°F)
Recommended operation temperature	15~30°C (59~86°F)
Storage temperature for short time	-10~45°C (14~113°F)
Storage temperature for long time	10~35°C (50~95°F)
Operation humidity	5~95%
Install altitude	≤ 4000m
Install location	Under the roof
Installation	Wall mounted
Certification	CE / IEC62619 / UL1973 / UN38.3

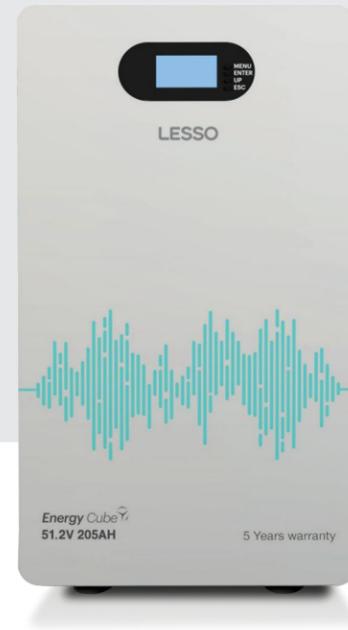

Residential Wall-mounted Energy Storage

LSRW series battery packs are wall-mounted residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with a mainstream inverter in different scenarios to save your electrical bill & back-up your power during grid outage or unavailable.

Features



Safety

High safety LiFePO₄ battery; Fire-safe, non-toxic; Lithium ferrous phosphate (LFP) cells.



Long-lasting

10 years life design. Long cycle life and superior performance



Portable installation

Wall-mounted installation method, does not occupy ground space.



Wide compatibility

Compatible with multiple brands of mainstream inverter use



Environment protection

Non-toxic and pollution-free

Items	LSRW51V205AH-LFP
Nominal voltage	51.2V
Nominal capacity	205Ah
Nominal energy	10.49kWh
Usable energy	10kWh
Recommended charge current	100A
Max. continuous charge current	120A
Max. continuous discharge current	150A
Max. continuous discharge power	7.6kW
Self-discharge rate (Sleep mode)	Capacity: ≤ 3.5% / month
Standard charge voltage	56.0V
End of discharge voltage	40V
Communication	RS485 / CAN
IP rating	IP55
Cycle life	≥ 6000 cycles @90%DOD
Net weight	86.5kg
Dimension of product (L*W*H)	700*400*240mm
Battery housing	SGCC with white coating
Operation temperature	0~60°C (32~140°F)
Recommended operation temperature	15~30°C (59~86°F)
Storage temperature for short time	-10~45°C (14~113°F)
Storage temperature for long time	10~35°C (50~95°F)
Operation humidity	5~95%
Install altitude	≤ 4000m
Install location	Under the roof
Installation	Wall mounted, Floor standing
Certification	UN38.3 / MSDS



Residential Wall-mounted Energy Storage

LSRW series battery packs are wall-mounted residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with a mainstream inverter in different scenarios to save your electrical bill & back-up your power during grid outage or unavailable.

Features



Safety

High safety LiFePO₄ battery; Fire-safe, non-toxic; Lithium ferrous phosphate (LFP) cells.



Long-lasting

10 years life design. Long cycle life and superior performance



Portable installation

Wall mounted installation method, wheeled mobility.



Wide compatibility

Compatible with multiple brands of mainstream inverter use



Environment protection

Non-toxic and pollution-free

Items	LSRW51V280AH-LFP
Nominal voltage	51.2V
Nominal capacity	280Ah
Nominal energy	14.3kWh
Usable energy	14kWh
Recommended charge current	140A
Max. continuous charge current	200A
Max. continuous discharge current	200A
Max. continuous discharge power	10kW
Self-discharge rate (Sleep mode)	Capacity: ≤ 3% / month
Standard charge voltage	56.0V
End of discharge voltage	40V
Communication	RS485 / CAN
IP rating	IP55
Cycle life	≥ 6000 cycles @90%DOD
Net weight	122kg
Dimension of product (L*W*H)	700*600*248mm
Battery housing	SGCC with white coating
Operation temperature	0~60°C (32~140°F)
Recommended operation temperature	15~30°C (59~86°F)
Storage temperature for short time	-10~45°C (14~113°F)
Storage temperature for long time	10~35°C (50~95°F)
Operation humidity	5~95%
Install altitude	≤ 4000m
Install location	Floor standing
Certification	UN38.3 / MSDS

LESSO



LSRR51V100AH-LFP Residential Rack Energy Storage

LSRR series battery packs are rack type residential lithium batteries, designed entirely for residential ESS applications. With our battery technology, you can easily combine it with any mainstream inverter in different scenarios to reduce your electrical bill & back-up your power during grid outage or when power is unavailable



Modular

Support up to 32 units in parallel, scale from 5 kWh to 160 kWh configuration without external controller




4 types of installation


Compact & Flexible. 3U (133mm) standard height design. Optional bracket kits for different installation scenarios.



Wall mounted



Floor mounted



Rack mounted



Stack

CE UK CA UN38.3

LESSO


Residential Rack Energy Storage

Items	LSRR51V100AH-LFP
Nominal voltage	51.2V
Nominal capacity	100Ah
Nominal energy	5.12kWh
Usable energy	4.92kWh
Operating voltage range	44.8V~56.0V
Charge voltage	56V
Float voltage	54.6V
Recommended charge current	50A
Max. charge current	70A
Recommended discharge current	50A
Max. discharge current	100A
Communication	RS485 /CAN
Peak discharge current / unit	101~119A@5mins 120~149A@15S
IP rating	IP20
Cycle life	≥ 6000 cycles @90%DOD
Net weight / unit	47kg
Gross weight / unit	50kg
Dimension of product / unit	482*133.5*460mm
Dimension of packaging / unit	574*217*526mm
Cell type	Lithium-iron phosphate (LiFePO ₄)
Design life	15 years
Operation temperature	-10~50°C (14~122°F)
Storage temperature	-10~45°C(14~113°F)
Relative humidity	5% - 90%, No condensation
Install altitude	≤ 4000m
Install location	Indoor
Installation	Wall mounted / Floor mounted / Stack / Rack mounted
Certification	CE / IEC62619 / UL1973 / UN38.3

[1] Test conditions: 90% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C

[2] Available energy of the system may be different from various inverter brands

[3] Derating occurs when the operating temperature from -10°C to 10°C & 40°C to 50°C

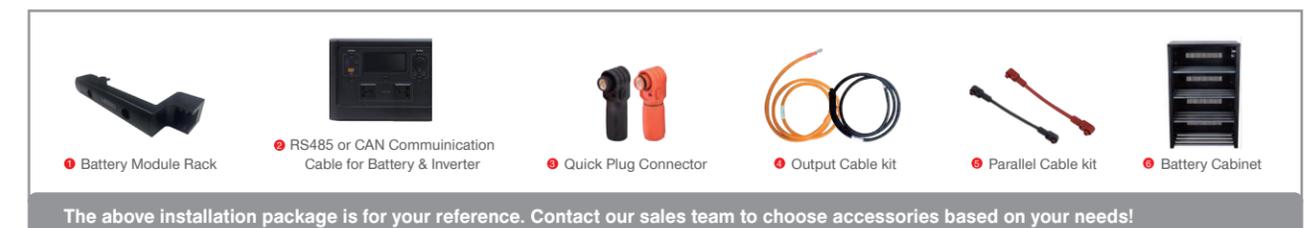

The above installation package is for your reference. Contact our sales team to choose accessories based on your needs!

- 1 Unique rack for stacking installation battery modules.
- 2 The data exchange between the battery and the inverter is necessary, and some models use RS485 mode or CAN mode for communication. Please refer to the user manual for specific model information. The length of this communication cable is 2 meters.
- 3 The terminals of the battery are equipped with specially designed quick plug connector for easy installation and disassembly. Can be used for the battery parallel wires & output wires fabrication.
- 4 Pre fabricated with quick plug connector and pre-insulated terminal, which use for wiring between battery and inverter or combiner box. The length of this cable kit is 2 meters with 25 mm².
- 5 Pre fabricated with quick plug connectors, which use for wiring battery parallel connection. The length of this cable kit is 0.25 meter with 35 mm².
- 6 Battery installation cabinet, there has 6 version for selection. (2/3/6/10/12/16 layers)

Guangdong Lesso Energy Storage Technology Co., Ltd

Daba Industrial Area, Longjiang Town, Foshan City, Guangdong Province, China

LESSO Solar

energy@lessosolar.com www.lessosolar.com

Portable Energy Storage

Let There Be Light, Anywhere, Anytime





P3 Plus Portable Energy Storage

Features

- Paired with a powerful 300W inverter, be able to power 80% of household device.
- With ultra-safe LiFePO₄batteries and high-quality BMS technology protection, making it areliable backup power supply.
- Offering 4 charging methods, to ensure that the device maintains the charge reserve anytime and anywhere.
- 4 outputs, AC ports, standard USB-A/Type-C/car port and wireless charging pad, meeting various needs.

Product Model	P3 Plus	
Built-in Battery	Lithium iron phosphate battery (378Wh)	
Input Charging	Power adapter: 120W/20V	
Solar Panel Input	MPPT, 12.5V~25V/8A Max	
Fully Charged Time	FDC solar: 4h; Power adapter: 3.5h	
USB Output	USB1	QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP
	USB2	QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP
	TYPE-C1	PD65W 5V3.25A 9V3.25A 12V3.25A 15V3.25A 20V3.25A
DC Output	12V/8.3A	
AC Output	Sine Wave Output	CN: 220V+10V, 60Hz/50Hz+3Hz
		US: 110V+10V, 60Hz/50Hz+3Hz
		JP: 100V+10V, 60Hz/50Hz+3Hz
		EU/UK: 230V+10V, 60Hz/50Hz+3Hz
AC Continuous Output	300W	
AC Max Output	600W about 1s	
Solar Input	12.5V-25V 120W (Max)	
Operation Temperature	-10~40°C	
Charging Temperature	0~40°C	
Battery Capacity	378Wh	
Cycle Life	2000 times	
Dimensions(mm)	280 × 210 × 170	
Weight(kg)	5.3	

Remarks: specifications are subject to change without notice



P6 Plus

Portable Energy Storage

Features

-  Paired with a powerful 600W inverter, be able to power 99% of household device.
-  With ultra-safe LiFePO4 batteries and high-quality BMS technology protection, making it a reliable backup power supply.
-  Offering 4 charging methods, to ensure that the device maintains the charge reserve anytime and anywhere.
-  8 outputs, AC ports, standard USB-A/Type-C/car port and wireless charging pad, meeting various needs.

Product Model		P6 Plus
Builtin Battery		Lithium iron phosphate battery (576Wh)
Input Charging		Power adapter: 120W/20V
Solar Panel Input		MPPT, 12.5V~25V/8A Max
Fully Charged Time		FDC solar: 5.5h Power adapter: 5h
USB Output	USB1	QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP
	USB2	QC3.0/5V2.4A 9V2A 12V 1.5A /BC1.2 AFC FCP
	TYPE-C1	PD65W 5V3.25A 9V3.25A 12V3.25A 15V3.25A 20V3.25A
	TYPE-C2	PD30W 5V2.5A 9V2.5A 12V2.5A
DC Output		12V/8.3A
AC Output	Sine Wave Output	CN: 220V+10V, 60Hz/50Hz+3Hz
		US: 110V+10V, 60Hz/50Hz+3Hz
		JP: 100V+10V, 60Hz/50Hz+3Hz
		EU/UK: 230V+10V, 60Hz/50Hz+3Hz
AC Continuous Output		600W
AC Max Output		900W about 1s
Solar Input		12.5V-25V 120W (Max)
Operation Temperature		-10~40°C
Charging Temperature		0~40°C
Battery Capacity		576Wh
Cycle Life		2000 times
Dimensions(mm)		320 × 210 × 226
Weight(kg)		7.1

Remarks: specifications are subject to change without notice

EV Charger

High Power, Plug and Charge



LESSO

EV Charger

Mobile charge at any time



LESSO

EV Charger



LSACS-E-32/230-B01-1
LSACS-E-32/230-B01-2



LSACS-E-32/230-B02-1
LSACS-E-32/230-B02-2

Easy switching among multi-gear currents

The default current is 32A, if this current is insufficient for charging at this time, you can adjust the charging current.

Reservation charging and avoiding peak hours

To take advantage of the cheap price and save on power, you may schedule a charging session for 1~10 hours

Strong compatibility and suitability for various models

Suitable for most new energy vehicle models.

8 Safety features

Protection against overheating, overcurrent, leakage, overvoltage, output exception, CP fault, communication fault, and relay fault.

Protection grade: IP55

It has an IP55 waterproof and dust-proof function, and always ensures the charging safety of your car, even in severe outdoor environments.

Compressive, strong and durable

The mainbox is made of high-strength PC material with strong, compressive resistance.

Technical parameter

Types	LSACS-E-32/230-B01-1	LSACS-E-32/230-B01-2	LSACS-E-32/230-B02-1	LSACS-E-32/230-B02-2
Output Power	7kW			
Rated Output Voltage	Two-phase 230VAC			
Rated Output Current	32A			
Display Mode	LED light	LED light	Display	Display
Use Method	Swipe card/Bluetooth/Free vend(Optional)			
Plug Type	Type 2			
Rated Output Frequency	60Hz			
Insulation Resistance	>10MΩ			
Operation Temperature	-20°C~+50°C			
Cable Length	5m (customizable)			
Dimension	Control mainbox: 342 (L) * 214(M) * 116mm (H)			
Flame Retardant Rating	UL94-V0			
Standard	IEC 62196-1:2022, IEC 61851-1-2017			

Guangdong Lesso Energy Storage Technology Co., Ltd

Daba Industrial Area, Longjiang Town, Foshan City, Guangdong Province, China

LESSO Solar

energy@lessosolar.com www.lessosolar.com

LESSO

EV Charger

Mobile charge at any time



LESSO

EV Charger



LSACS-C-32/220-B01



LSACS-C-32/220-B02

Easy switching among multi-gear currents

The default current is 32A, if this current is insufficient for charging at this time, you can adjust the charging current.

Reservation charging and avoiding peak hours

To take advantage of the cheap price and save on power, you may schedule a charging session for 1~10 hours

Strong compatibility and suitability for various models

Suitable for most new energy vehicle models.

8 Safety features

Protection against overheating, overcurrent, leakage, overvoltage, output exception, CP fault, communication fault, and relay fault.

Protection grade: IP55

It has an IP55 waterproof and dust-proof function, and always ensures the charging safety of your car, even in severe outdoor environments.

Compressive, strong and durable

The mainbox is made of high-strength PC material with strong, compressive resistance.

Technical parameter

Types	LSACS-C-32/220-B01	LSACS-C-32/220-B02
Output Power	7kW	
Rated Output Voltage	Two-phase 240VAC	
Rated Output Current	32A	
Display Mode	LED light	Display
Use Method	Swipe card/Bluetooth/Free vend(Optional)	
Plug Type	GBT	
Rated Output Frequency	60Hz	
Insulation Resistance	>10MΩ	
Operation Temperature	-20°C~+50°C	
Cable Length	5m (customizable)	
Dimension	Control mainbox: 342 (L) *214(M) *116mm (H)	
Flame Retardant Rating	UL94-V0	
Standard	GB/T18487.1-2023 , GB/T20234.1-2023	

Guangdong Lesso Energy Storage Technology Co., Ltd

Daba Industrial Area, Longjiang Town, Foshan City, Guangdong Province, China

LESSO Solar

energy@lessosolar.com www.lessosolar.com

30kW Integral DC Charger

Features

1. Super wide constant power output voltage
2. Suitable for home and commercial use
3. Emperature controlled fan speed, lower noise
4. High protection for complex environment
5. The most complete startup method
6. Multiple wireless communications
7. Smart charging and load balancing

Applications

Home, Shopping Mall, Public Parking



Model	LGE-303D1E5C1
Rated power	30kW
AC voltage	400VAC±15%
Power supply	3P+N+PE
DC Max current	100A
DC voltage	150~1000VDC
Frequency	50/60Hz
Charge plug	CCS2
Cable length	5m (optional)
Enclosure	Galvanized Steel
LED indicator	Green/Yellow/Blue/Red
LCD display	4.3" color LCD
RFID	Non-contact (ISO/IEC14443 A)
Start method	QR code/Card/BLE5.0
Interface	BLE5.0/Ethernet/4G
Protocol	OCPP1.6J/2.0J (optional)
Efficiency	≥95% (Half load and above)
Power factor	≥0.98 (Rated load)
Voltage accuracy	≤±0.5%
Current accuracy	≤±1%
Energy meter	Accuracy level1.0
Emergency stop	Yes
Protection grade	IP54
Certification	CE,CB
Standard	EN/IEC 61851-1,EN/IEC 61851-23,IEC 61851-24,EN/IEC 61851-21-1
Installation	Wall mounted/Floor mounted
Cooling	Forced air cooling
Temperature	-25°C~+55°C
Humidity	5%~95%
Atitude	≤2000m

Remarks: specifications are subject to change without notice

AC&DC integrated charger



Features

1. With 2 DC outputs and 1 AC output, simultaneously charging
2. Flexible power automatic group control function brings efficient charging
3. Hardware level switch monitoring and interlock protection functions
4. Charging module adopts the glue filling process
5. Wide voltage constant power output
6. Smart charging and load balancing
7. Multi-standard plug: CCS2, CHAdeMO, GBT, Type2

Applications

Shopping mall, Public parking, Highway

Model	LSADC-M-202/1000-A01	LSADC-M-202/1000-B01	LSADC-M-180/1000-C01	LSADC-M-180/1000-D01
Rated power	1xCCS2:Max180kW 1xCHAdeMO:Max60kW 1xType2:Max22kW total:202kW	2xCCS2:Max180kW 1xType2:Max22kW total:202kW	1xCCS2:Max180kW 1xCHAdeMO:Max60kW total:180kW	2xCCS2:Max180kW total:180kW
AC voltage	400VAC±10%			
Power supply	3P+N+PE			
DC Max current	1xCCS2:Max200A 1xCHAdeMO:Max125A 1xType2:Max32A	2xCCS2:Max200A 1xType2:Max32A	1xCCS2:Max200A 1xCHAdeMO:Max125A	2xCCS2:Max200A
AC/DC voltage	1xCCS2:150~1000VDC 1xCHAdeMO:150~500VDC 1xType2:400VAC	2xCCS2:150~1000VDC 1xType2:400VAC	1xCCS2:150~1000VDC 1xCHAdeMO:150~500VDC	2xCCS2:150~1000VDC
Frequency	50/60Hz			
Charge plug	CCS2+CHAdeMO+Type2	CCS2+CCS2+Type2	CCS2+CHAdeMO	CCS2+CCS2
Cable length	5m (Optional)			
Enclosure	Galvanized Steel			
LED indicator	Green/Yellow/Blue/Red			
LCD display	7" color LCD			
RFID	Non-contact (ISO/IEC14443 A)			
Start method	QR code/Card/BLE5.0/PnC			
Interface	Ethernet/4G/WIFI (Optional)			
Protocol	OCPP1.6J/2.0J (Optional)			
Efficiency	≥95% (Half load and above)			
Power factor	≥0.98 (Rated load)			
Voltage accuracy	±0.5%			
Current accuracy	±1%			
Energy meter	Accuracy level 1.0			
Emergency stop	Yes			
Protection grade	IP54			
Certification	CE, CB			
Standard	EN/IEC 61851-1, EN/IEC 61851-23, IEC 61851-24, EN/IEC 61851-21-1			
Installation	Wall mounted/Floor mounted			
Cooling	Forced air cooling			
Temperature	-25°C~+55°C			
Humidity	5%~95%			
Attitude	≤2000m			
Product size	850×850×1800 (W×D×H, mm)			
Net weight	324kg	324kg	318kg	318kg

Remarks: specifications are subject to change without notice